
Online Examination Report

Date:	13.08.2014
Attempts:	1
Examinee:	Ekwee, Simon
Date of birth:	
Subject:	070-Operational procedures
Result:	52,49 %
Time used:	00:48:57 (HH:MM:SS)

Attachments

1. List of result by question
2. List of result by topic
3. Detailed question result report

Attachment 1: List of result by question

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
1	200	71. OPERATIONAL PROCEDURES		1,00	1,00
2	175	71. OPERATIONAL PROCEDURES		1,00	1,00
3	174	71. OPERATIONAL PROCEDURES		0,00	1,00
4	1	71. OPERATIONAL PROCEDURES		0,00	1,00
5	184	71. OPERATIONAL PROCEDURES		0,00	1,00
6	25	71.1.1 ICAO Annex 6		1,00	1,00
7	118	71.1.1.3 General		0,00	1,00
8	19	71.1.1.3 General		1,00	1,00
9	39	71.1.2 Civil Aviation Regulations		1,00	1,00
10	173	71.1.2 Civil Aviation Regulations		1,00	1,00
11	61	71.1.2.1 Civil Aviation Regulations		0,00	1,00
12	24	71.1.2.6 Civil Aviation Regulations		1,00	1,00
13	168	71.1.3.2 Transoceanic and polar flight		0,00	1,00
14	82	71.1.3.3 MNPS Airspace		0,00	1,00
15	170	71.2 SPECIAL OPERATIONAL PROCEDURES		0,00	1,00
16	90	71.2.1 Operations Manual		0,00	1,00
17	126	71.2.1 Operations Manual		1,00	1,00
18	42	71.2.1 Operations Manual		1,00	1,00
19	171	71.2.1.1 Operating procedures		0,00	1,00
20	150	71.2.1.1 Operating procedures		0,00	1,00
21	139	71.2.1.1 Operating procedures		0,00	1,00
22	138	71.2.1.1 Operating procedures		1,00	1,00
23	124	71.2.2.1 On ground de-/anti-icing		0,00	1,00
24	140	71.2.2.1 On ground de-/anti-icing		1,00	1,00
25	114	71.2.2.1 On ground de-/anti-icing		0,00	1,00
26	50	71.2.5.3 Fire in the cabin, cockpit, cargo comp		1,00	1,00
27	117	71.2.5.3 Fire in the cabin, cockpit, cargo comp		0,00	1,00
28	102	71.2.5.3 Fire in the cabin, cockpit, cargo comp		1,00	1,00

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
29	134	71.2.5.6	Types of extinguishers	0,00	1,00
30	131	71.2.5.6	Types of extinguishers	1,00	1,00
31	16	71.2.5.6	Types of extinguishers	1,00	1,00
32	86	71.2.7.1	Effects and recognition	1,00	1,00
33	162	71.2.8	Wake turbulence	1,00	1,00
34	79	71.2.9	Security (unlawful events)	1,00	1,00
35	159	71.2.9.4	Bomb on board	1,00	1,00
36	8	71.2.12	Transport of dangerous goods	0,00	1,00
37	146	71.2.12	Transport of dangerous goods	0,00	1,00
38	154	71.2.13	Contaminated runways	0,00	1,00
39	18	71.2.13.1	Kinds of contamination	1,00	1,00
40	65	71.2.13.4	Procedures	1,00	1,00
Total:52%				21,00	40,00

Attachment 2: List of result by topic

Licence

Date: 13.08.2014

Examinee: Ekwee, Simon

Location: Uganda Civil Aviation Authority

Your Result: 21,00 from 40,00 Points (52,50 %)

Topics	Amount of Questions	Points achieved	Maximum Points	Percent
71. OPERATIONAL PROCEDURES	40	21,00	40,00	52,50
71.1. GENERAL REQUIREMENTS	9	5,00	9,00	55,56
71.2. SPECIAL OPERATIONAL PROCEDURES	26	14,00	26,00	53,85
Total	40	21,00	40,00	52,50

1

If during a VFR practice instrument approach, Radar Approach Control assigns an altitude or heading that will cause you to enter the clouds, what action should be taken?

- ☒ **Avoid the clouds and inform ATC that altitude/heading will not permit VFR.**
- ☐ **Enter the clouds, since ATC authorization for practice approaches is considered an IFR clearance.**
- ☐ **Abandon the approach.**

Candidate: Simon Ekwee
Date of birth: --

Subject: 070-Operational procedures
Date: 2014-08-13



2

(Refer to Figure 126.) Which altitude (box 1) is applicable to the vertical extent of the inner and outer circles (now called surface and shelf areas)?

☐ 3,000 feet above airport.

☒ 4,000 feet above airport.

☐ 3,000 feet AGL.

See Attachments:

1. atp_126.jpg

Figure 126

(Attachment
No.1)

3

Which incident would require that the nearest Flight Control Center field office be notified immediately?

- ☐ Ground fire resulting in fire equipment dispatch.
- ☐ In-flight fire.
- ☒ Fire of the primary aircraft while in a hangar which results in damage to other property of more than \$25,000.

Candidate: Simon Ekwee
Date of birth: --

Subject: 070-Operational procedures
Date: 2014-08-13



4

According to civil aviation regulations and assuming the following circumstances:

- for a Category A aeroplane
- an aerodrome equipped with runway edge lighting and centre line lighting and multiple RVR information
- an acceptable alternate aerodrome is available, the minimum RVR / Visibility required for take-off is:

☐ 150 m.

☐ 250 m.

☐ 300 m.

☒ 200 m.

5

When diverting to an alternate airport because of an emergency, pilots should

- ☒ **complete all plotting, measuring, and computations involved before diverting.**
- ☐ **rely upon radio as the primary method of navigation.**
- ☐ **apply rule-of-thumb computations, estimates, and other appropriate shortcuts to divert to the new course as soon as possible.**

6

The master minimum equipment list (M MEL) is established by:

- ☐ the operator of the aircraft, and accepted by the manufacturer
- ☐ the operator of the aircraft, and accepted by the authority
- ☒ the manufacturer of the aircraft, and accepted by the authority
- ☐ the manufacturer of the aircraft, but need not to be accepted by the authority

7

90 % of bird strikes occur :

☒ **between 500 and 1 000 m**

☐ **under 500 m**

☐ **above 1 000 m**

☐ **between 500 and 1 500 m**

8

During a night flight, an observer located in the cockpit, seeing an aircraft coming from front right on approximate opposite parallel track, will first see the:

- ☐ red light
- ☐ red and white flashing light
- ☒ green light
- ☐ white light

9

An operator must ensure that, for the duration of each flight, be kept on the ground a copy of the :

- ☒ operation flight plan.
- ☐ flight plan processing.
- ☐ ATC (Air Traffic Control) flight plan.
- ☐ flight route sheet.

10

An airplane operated by a commercial operator flying over uninhabited terrain must carry which emergency equipment?

- ☐ A signal mirror and colored smoke flares.
- ☒ An approved survival-type emergency locator transmitter.
- ☐ Survival kit for each passenger.

11

AOC regulations applies to:

- ☐ aeroplanes proceeding from EAC states or flying over them.
- ☒ the operation by an EAC state member of any civil aeroplane.
- ☐ the operation by an EAC state member of any civil commercial transport aeroplane.
- ☐ aeroplanes used by police, customs and defence departments.

12

In accordance with civil aviation regulations, for aeroplanes intended to be operated at pressure altitude of 39000 ft, the total number of oxygen dispensing units and outlets shall exceed:

- ☐ the number of passengers by at least 10%.
- ☒ the number of seats by at least 10%.
- ☐ the number of passengers.
- ☐ the number of seats.

13

Each large aircraft operating over water must have a life preserver for each

- ☐ seat on the aircraft.
- ☐ aircraft occupant.
- ☒ passenger seat, plus 10 percent.

14

An aircraft operating within MNPS Airspace is unable to continue flight in accordance with its air traffic control clearance, but is able to maintain its assigned level, and due to a total loss of communications capability, cannot obtain a revised clearance from ATC. The aircraft should offset from the assigned route by 15 NM and climb or descent 500 ft, if:

☒ above FL410

☐ at FL410

☐ below FL410

☐ at FL430

15

When a supplemental air carrier is operating over an uninhabited area, how many appropriately equipped survival kits are required aboard the aircraft?

- ☐ One for each passenger seat.
- ☐ One for each occupant of the aircraft.
- ☒ One for each passenger, plus 10 percent.

16

The observations and studies conducted on the behavior of birds on the ground, ahead of an aircraft taking off and having reached an average speed of 135 kt, show that birds fly away :

- ☐ as soon as they hear the engines noise
- ☒ about ten seconds beforehand
- ☐ about two seconds beforehand
- ☐ from the beginning of the takeoff roll

17

The Master Minimum Equipment List (M MEL) defines the equipment on which certain in-flight failures can be allowed and the conditions under which this allowance can be accepted. This M MEL is drawn up by :

- ☐ the operator and is specified in the operation manual
- ☒ the manufacturer and approved by the certification authority
- ☐ the operator from a main list drawn up by the manufacturer
- ☐ the operator and approved by the certification authority

18

During a flight, the chief steward informs the crew that a passenger is using a portable device suspected to disturb the aircraft electronic systems. The captain:

- ☒ must not authorize any person to use such a device on board.
- ☐ authorizes its use during the whole flight phase.
- ☐ authorizes its use except during take-off and landing phases.
- ☐ may authorize the use of this device, as an exception.

19

Life preservers required for overwater operations are stored

- ☐ within easy reach of each passenger.
- ☐ within easy reach of each seated occupant.
- ☒ under each occupant seat.

20

Supplemental oxygen is used to :

- ☐ protect a crew who fights a fire
- ☐ assist a passenger with breathing disorders
- ☐ provide people on board with oxygen during a cabin depressurisation
- ☒ provide with oxygen passengers who might require it, following a cabin depressurisation

21

A category B aircraft can carry out an indirect approach followed by a visual maneuver only if the horizontal visibility is higher than or equal to:

☐ 2400 m

☐ 3600 m

☒ 1500 m

☐ 1600 m

22

On overwater flights, an operator shall not operate an aeroplane at a distance away from land, which is suitable for making an emergency landing greater than that corresponding to :

- ☐ 300 NM or 90 minutes at cruising speed.
- ☐ 100 NM or 30 minutes at cruising speed.
- ☒ 400 NM or 120 minutes at cruising speed.
- ☐ 200 NM or 45 minutes at cruising speed.

23

If after anti-icing has been completed a pre-departure inspection reveals evidence of freezing, the correct action is to :

- ☐ complete departure as soon as possible to reduce the possibility of further freezing
- ☒ complete departure provided that the recommended anti-icing holdover (protection) time for the prevailing conditons and type of fluid used has not been exceeded
- ☐ switch on all the aeroplane anti-icing and de-icing systems and leave on until clear of icing conditions when airborne
- ☐ carry out a further de-icing process

24

An aircraft having undergone an anti-icing procedure and having exceeded the protection time of the anti-icing fluid:

- ☒ must undergo a de-icing procedure before a new application of anti-icing fluid for take-off.
- ☐ must only undergo a new anti-icing procedure for take-off.
- ☐ must only undergo a de-icing procedure for take-off.
- ☐ need not to undergo a new anti-icing procedure for take-off.

25

The anti-icing fluid protecting film can wear off and reduce considerably the protection time:

- ☒ when the temperature of the airplane skin is close to 0 °C.
- ☐ when the outside temperature is close to 0 °C.
- ☒ during strong winds or as a result of the other aircraft engines jet wash.
- ☐ when the airplane is into the wind.

26

An aircraft having undertaken an anti-icing procedure and having exceeded the holdover time of the anti-icing fluid:

- ☒ **must undertake a de-icing procedure before a new application of anti-icing fluid before take-off.**
- ☐ **does not require a new anti-icing procedure before take-off.**
- ☐ **must only undertake a de-icing procedure before take-off.**
- ☐ **must only undertake a new anti-icing procedure before take-off.**

27

To extinguish a fire in the cockpit, you use:

- 1. a water fire-extinguisher*
- 2. a powder or chemical fire-extinguisher*
- 3. a halon fire-extinguisher*
- 4. a CO2 fire-extinguisher*

☐ 1, 2, 3, 4

☐ 2, 3, 4

☒ 1, 2

☐ 3, 4

28

If smoke appears in the air conditioning, the first action to take is to :

- ☐ Begin an emergency descent.
- ☐ Determine which system is causing the smoke.
- ☒ Put on the mask and goggles.
- ☐ Cut off all air conditioning units.

29

The fire extinguisher types which may be used on class B fires are:

- 1 - H₂O,
- 2 - CO₂,
- 3 - dry-chemical,
- 4 - halogen

☐ 2 - 3 - 4

☒ 1 - 2 - 3 - 4,

☐ 3 - 4

☐ 2

30

You will use a halon extinguisher for a fire of:

1 - solids (fabric, plastic, ...)

2 - liquids (alcohol, gasoline, ...)

3 - gas

4 - metals (aluminium, magnesium, ...)

The combination regrouping all the correct statements

☐ 1,2,3,4

☐ 1,2,4

☒ 1,2,3

☐ 2,3,4

31

You will use a CO2 fire-extinguisher for :

- 1. a paper fire*
- 2. a plastic fire*
- 3. a hydrocarbon fire*
- 4. an electrical fire*

The combination regrouping all the correct statements is:

☐ 1,2,3

☒ 1,2,3,4

☐ 3,4

☐ 2,3

32

Wind shear is:

- ☐ a variation only in vertical wind velocity over a short distance.
- ☐ a variation only in horizontal wind velocity over a short distance.
- ☒ a large variation in vertical or horizontal wind velocity and / or wind direction over a short distance.
- ☐ a variation in vertical or horizontal wind velocity and / or wind direction over a large distance.

33

The greatest wake turbulence occurs when the generating aircraft is :

- ☒ Large, heavy, at low speed in clean configuration
- ☐ Large, heavy, at maximum speed in full flaps configuration
- ☐ Small, light, at maximum speed in full flaps configuration
- ☐ Small, light, at low speed in clean configuration

34

What transponder code should be used to provide recognition of an aircraft which is being subjected to unlawful interference :

☐ code 7700

☒ code 7500

☐ code 7600

☐ code 2000

35

In case of a serious threat based on the presence of a bomb on board a pressurized aircraft and disregarding any fuel considerations:

- ☐ you climb to the maximum flight level which does not need the use of pressurization.
- ☒ you descend to the flight level corresponding to the indicated cabin altitude or the safety altitude if higher and take preventive steps by putting yourself in a landing approach configuration.
- ☐ you carry out an emergency descent to reach the safety altitude.
- ☐ you go down to the level corresponding to the indicated cabin altitude and keep the airplane in a clean configuration until the final approach.

36

In the hazardous materials transportation act, the freight compliance with the regulatory arrangements is the responsibility of the :

- ☒ **sender.**
- ☐ **aerodrome manager.**
- ☐ **station manager.**
- ☒ **captain.**

37

The dangerous goods transport document, if required, shall be drawn up by :

- ☒ the captain.
- ☐ the handling agent.
- ☐ the operator.
- ☐ the shipper.

38

According to the civil aviation regulations a runway is considered damp when:

- ☒ it is covered with a film of water of less than 3 mm.
- ☐ its surface is not dry, and when surface moisture does not give it a shiny appearance.
- ☐ it is covered with a film of water of less than 1 mm.
- ☐ surface moisture gives it a shiny appearance.

39

In the civil aviation regulation, a runway is considered wet when:

1. it is covered with a quantity of water or loose or slushy snow less than or equal to the equivalent of 3 mm of water.
2. the amount of surface moisture is sufficient to modify its colour but does not give it a shiny appearance.
3. the amount of surface moisture is sufficient to make it reflective, but does not create large stagnant sheets of water.
4. it bears stagnant sheets of water.

The combination regrouping all the correct statements is:

☐ 4

☒ 1, 3

☐ 1, 2

☐ 1, 2, 3

40

For an airplane with a tyre pressure of 14 bars, there is a risk of dynamic hydroplaning as soon as the :

1- water height is equal to the depth of the tyre grooves.

2- speed is greater than 123 kt.

3- water height is equal to the half of the depth of the tyre grooves.

4- speed is greater than 95 kt. The combination regrouping all the correct statements is:

☐ 3 and 4.

☐ 1 and 4.

☒ 1 and 2.

☐ 2 and 3.


Attachment No. 1

Questions 2

Figure 126

atp_126.jpg

Class C Airspace

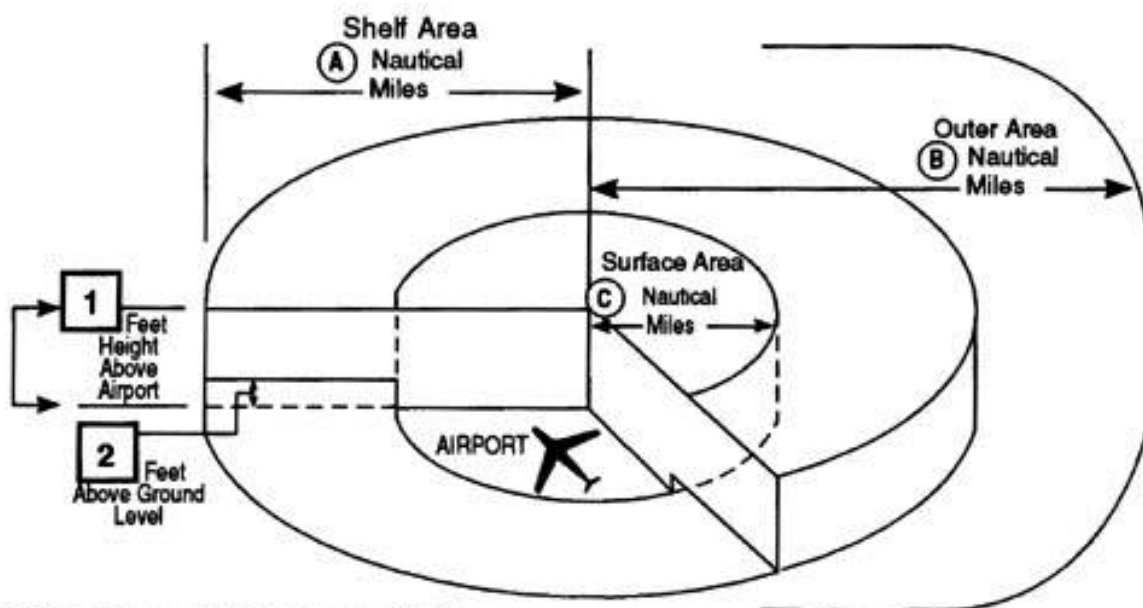

Services upon establishing two-way radio communication and radar contact:

Sequencing Arrivals

IFR/VFR Standard Separation

IFR/VFR Traffic Advisories and Conflict Resolution

VFR/VFR Traffic Advisories

IFR: Instrument Flight Rules
VFR: Visual Flight Rules

Figure 126. Class C Airspace © ASA