
Online Examination Report

Date:	14.08.2014
Attempts:	1
Examinee:	Abey, Stacy
Date of birth:	10/10/1988
Subject:	070-Operational procedures
Result:	32,49 %
Time used:	00:58:56 (HH:MM:SS)

Attachments

1. List of result by question
2. List of result by topic
3. Detailed question result report

Attachment 1: List of result by question

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
1	179	71. OPERATIONAL PROCEDURES		1,00	1,00
2	1	71. OPERATIONAL PROCEDURES		0,00	1,00
3	176	71. OPERATIONAL PROCEDURES		0,00	1,00
4	185	71. OPERATIONAL PROCEDURES		0,00	1,00
5	186	71. OPERATIONAL PROCEDURES		0,00	1,00
6	175	71. OPERATIONAL PROCEDURES		0,00	1,00
7	200	71. OPERATIONAL PROCEDURES		1,00	1,00
8	149	71.1.1.3 General		0,00	1,00
9	99	71.1.2 Civil Aviation Regulations		1,00	1,00
10	76	71.1.2.6 Civil Aviation Regulations		1,00	1,00
11	168	71.1.3.2 Transoceanic and polar flight		0,00	1,00
12	10	71.1.3.3 MNPS Airspace		1,00	1,00
13	82	71.1.3.3 MNPS Airspace		0,00	1,00
14	29	71.1.3.3 MNPS Airspace		0,00	1,00
15	170	71.2 SPECIAL OPERATIONAL PROCEDURES		0,00	1,00
16	100	71.2.1 Operations Manual		1,00	1,00
17	7	71.2.1.1 Operating procedures		1,00	1,00
18	112	71.2.1.1 Operating procedures		1,00	1,00
19	171	71.2.1.1 Operating procedures		0,00	1,00
20	28	71.2.1.1 Operating procedures		0,00	1,00
21	135	71.2.1.1 Operating procedures		0,00	1,00
22	110	71.2.1.1 Operating procedures		0,00	1,00
23	121	71.2.1.1 Operating procedures		1,00	1,00
24	139	71.2.1.1 Operating procedures		0,00	1,00
25	3	71.2.2 Icing conditions		0,00	1,00
26	114	71.2.2.1 On ground de-/anti-icing		1,00	1,00
27	87	71.2.5.6 Types of extinguishers		0,00	1,00
28	141	71.2.5.6 Types of extinguishers		0,00	1,00

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
29	16	71.2.5.6	Types of extinguishers	0,00	1,00
30	11	71.2.7	Wind shear and microburst	0,00	1,00
31	6	71.2.7	Wind shear and microburst	0,00	1,00
32	78	71.2.7.1	Effects and recognition	1,00	1,00
33	51	71.2.8	Wake turbulence	0,00	1,00
34	12	71.2.8.1	Cause	0,00	1,00
35	108	71.2.9	Security (unlawful events)	1,00	1,00
36	83	71.2.9.1	ICAO Annex 17	0,00	1,00
37	9	71.2.12	Transport of dangerous goods	1,00	1,00
38	146	71.2.12	Transport of dangerous goods	0,00	1,00
39	70	71.2.13	Contaminated runways	0,00	1,00
40	67	71.2.13.4	Procedures	0,00	1,00
Total:32%				13,00	40,00

Attachment 2: List of result by topic

Licence

Date: 14.08.2014

Examinee: Abey, Stacy

Location: Uganda Civil Aviation Authority

Your Result: 13,00 from 40,00 Points (32,50 %)

Topics	Ammount of Questions	Points achieved	Maximum Points	Percent
71. OPERATIONAL PROCEDURES	40	13,00	40,00	32,50
71.1. GENERAL REQUIREMENTS	7	3,00	7,00	42,86
71.2. SPECIAL OPERATIONAL PROCEDURES	26	8,00	26,00	30,77
Total	40	13,00	40,00	32,50

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14

1

What aural and visual indications should be observed over an ILS middle marker?

- ☐ Continuous dots at the rate of six per second.
- ☒ Alternate dots and dashes at the rate of two per second.
- ☐ Continuous dashes at the rate of two per second.

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14



2

According to civil aviation regulations and assuming the following circumstances:

- for a Category A aeroplane
- an aerodrome equipped with runway edge lighting and centre line lighting and multiple RVR information
- an acceptable alternate aerodrome is available, the minimum RVR / Visibility required for take-off is:

☐ 300 m.

☐ 150 m.

☐ 250 m.

☒ 200 m.

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14



3

What minimum aircraft equipment is required for operation within Class C airspace?

☐ Two-way communications.

☒ Transponder and DME.

☐ Two-way communications and transponder.

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14

4

How does the wake turbulence vortex circulate around each wingtip?

- ☐ Outward, upward, and around each tip.
- ☒ Inward, upward, and counterclockwise.
- ☐ Inward, upward, and around each tip.

5

Which is a necessary condition for the occurrence of a low-level temperature inversion wind shear?

- ☐ The temperature differential between the cold and warm layers must be at least 10 degrees C.
- ☒ A wind direction difference of at least 30 degrees C between the wind near the surface and the wind just above the inversion.
- ☐ A calm or light wind near the surface and a relatively strong wind just above the inversion.

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14

6

(Refer to Figure 126.) Which altitude (box 1) is applicable to the vertical extent of the inner and outer circles (now called surface and shelf areas)?

☐ 4,000 feet above airport.

☒ 3,000 feet above airport.

☐ 3,000 feet AGL.

See Attachments:

1. atp_126.jpg

Figure 126

(Attachment No.1)

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14



7

If during a VFR practice instrument approach, Radar Approach Control assigns an altitude or heading that will cause you to enter the clouds, what action should be taken?

- ☐ Enter the clouds, since ATC authorization for practice approaches is considered an IFR clearance.
- ☐ Abandon the approach.
- ☒ Avoid the clouds and inform ATC that altitude/heading will not permit VFR.

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14

8

Which one of the following sets of conditions is most likely to attract birds to an aerodrome ?

- ☒ a refuse tip in close proximity
- ☐ a modern sewage tip in close proximity
- ☒ mowing and maintaining the grass long
- ☐ the extraction of minerals such as sand and gravel

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14

9

*Who checks, before flight, that the aircraft's weight is such that flight can be safely made, and that any transported cargo is properly distributed and secured?
(Annex 6, Part I)*

- ☒ The captain.
- ☐ The company's cargo technicians.
- ☐ The mechanic on board, or in his absence the co-pilot.
- ☐ The operator.

10

According to civil aviation regulations, an aeroplane whose maximum approved passenger seating configuration is 10 seats must be equipped with:

- ☐ one hand fire-extinguisher on the flight deck and two hand fire-extinguishers in the passenger compartment.
- ☐ two hand fire-extinguishers on the flight deck and two hand fire-extinguishers in the passenger compartment.
- ☐ three hand fire-extinguishers in the passenger compartment.
- ☒ one hand fire-extinguisher on the flight deck and one hand fire-extinguisher in the passenger compartment.

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14

11

Each large aircraft operating over water must have a life preserver for each

- ☒ aircraft occupant.
- ☐ passenger seat, plus 10 percent.
- ☒ seat on the aircraft.

12

Aircraft may operate in MNPS airspace along a number of special routes, if the aircraft is equipped with at least:

- ☐ three Inertial Navigation System (INS).
- ☐ two independent Long Range Navigation Systems (LRNS).
- ☐ two Inertial Navigation Systems (INS).
- ☒ one Long Range Navigation System (LNRS).

13

An aircraft operating within MNPS Airspace is unable to continue flight in accordance with its air traffic control clearance, but is able to maintain its assigned level, and due to a total loss of communications capability, cannot obtain a revised clearance from ATC. The aircraft should offset from the assigned route by 15 NM and climb or descent 500 ft, if:

☐ at FL410

☒ at FL430

☐ above FL410

☐ below FL410

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14



14

In airspace where MNPS is applicable, the minimum vertical separation between FL 290 and FL 410 is:

- ☐ 500 ft
- ☒ 1 500 ft
- ☐ 1 000 ft
- ☐ 2000ft

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14

15

When a supplemental air carrier is operating over an uninhabited area, how many appropriately equipped survival kits are required aboard the aircraft?

☒ **One for each passenger, plus 10 percent.**

☐ **One for each occupant of the aircraft.**

☐ **One for each passenger seat.**

16

Information concerning evacuation procedures can be found in the :

- ☐ flight manual.
- ☒ operation manual.
- ☐ operational flight plan.
- ☐ journey logbook.

17

The Minimum Equipment List (MEL) defines the equipment which can be inoperative when undertaking a flight and the additional procedures under which this allowance can be accepted . The MEL shall be drawn up by:

- ☒ **the operator and may be more restrictive than the Master Minimum Equipment List (MMEL)**
- ☐ **the operator and may be less restrictive than the Master Minimum equipment List (MMEL)**
- ☐ **the manufacturer and may be more restrictive than the Master Minimum Equipment List (MMEL)**
- ☐ **the manufacturer and may be less restrictive than the Master Minimum equipment List (MMEL)**

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14



18

A life jacket is mandatory for any passenger on board an aircraft flying away from the shore by more than :

☐ 100 NM

☒ 50 NM

☐ 400 NM

☐ 200 NM

19

Life preservers required for overwater operations are stored

- ☒ under each occupant seat.
- ☐ within easy reach of each seated occupant.
- ☐ within easy reach of each passenger.

20

An aircraft is flying in heavy rain. To carry out a safe approach, it is necessary to :

- ☒ carry out an approach with flaps up, in order to avoid exposing too much lifting surface to the rain
- ☐ reduce the approach speed, because the runway may be very slippery on landing
- ☐ maintain the normal approach speed up to landing
- ☐ increase its approach speed, because the rain affects the lift by deteriorating the boundary layer

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14

21

Selecting an alternate aerodrome the runway of this facility must be sufficiently long to allow a full stop landing from 50 ft above the threshold (jet type aircraft, dry runway) within:

☐ 50% of the landing distance available.

☐ 60% of the landing distance available.

☒ 80% of the landing distance available.

☐ 70% of the landing distance available.

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14

22

Following an emergency landing which will need an evacuation from the aircraft?

- 1 - remain on the runway,*
- 2 - clear the runway using the first available taxiway,*
- 3 - keep one engine or the APU running in order to maintain the electrical power supply on,*
- 4 - turn off all systems.*

☐ 2,4.

☐ 1,3.

☒ 2,3.

☐ 1,4.

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14



23

A category III A is an approach which may be carried out with a runway visual range of at least :

☐ 100 m

☐ 50 m

☐ 250 m

☒ 200 m

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14



24

A category B aircraft can carry out an indirect approach followed by a visual maneuver only if the horizontal visibility is higher than or equal to:

☒ 3600 m

☐ 1600 m

☐ 2400 m

☐ 1500 m

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14



25

The maximum validity of a SNOWTAM is :

☐ 12 hours

☐ 24 hours

☐ 3 hours

☒ 6 hours

26

The anti-icing fluid protecting film can wear off and reduce considerably the protection time:

- ☐ when the outside temperature is close to 0 °C.
- ☐ when the airplane is into the wind.
- ☐ when the temperature of the airplane skin is close to 0 °C.
- ☒ during strong winds or as a result of the other aircraft engines jet wash.

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14

27

CO2 type extinguishers are fit to fight:

1 - class A fires

2 - class B fires

3 - electrical source fires

4 - special fires: metals, gas, chemical product

Which of the following combinations contains all the correct statements:

☒ **2 - 3 - 4**

☐ **1 - 2 - 3**

☐ **1 - 2 - 4**

☐ **1 - 3 - 4**

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14

28

A fire occurs in a wheel and immediate action is required to extinguish it. The safest extinguishant to use is :

☐ water

☐ foam

☒ dry powder

☒ CO2 (carbon dioxide)

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14

29

You will use a CO2 fire-extinguisher for :

- 1. a paper fire*
- 2. a plastic fire*
- 3. a hydrocarbon fire*
- 4. an electrical fire*

The combination regrouping all the correct statements is:

☒ 3,4

☐ 2,3

☐ 1,2,3,4

☐ 1,2,3

30

One of the main characteristics of windshear is that it :

- ☐ can occur at any altitude and only in the horizontal plane
- ☒ occurs only at a low altitude (2000 ft) and never in the vertical plane
- ☐ can occur at any altitude in both the vertical and horizontal planes
- ☐ occurs only at a low altitude (2000 ft) and never in the horizontal plane

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14

31

Which one of the following magnitudes will be the first to change its value when penetrating a windshear ?

- ☐ Pitch angle.
- ☐ Groundspeed.
- ☐ Indicated airspeed.
- ☒ Vertical speed.

32

During a manual approach, the aeroplane is subjected to windshear with an increasing tail wind. In the absence of a pilot action, the aeroplane:

- 1- flies above the intended approach path
- 2- flies below the intended approach path
- 3- has an increasing true airspeed
- 4- has a decreasing true airspeed

The combination of correct statements is:

☐ 1, 4.

☒ 2, 4.

☐ 1, 3.

☐ 2, 3.

33

According with DOC 4444 (ICAO), a wake turbulence radar separation minima of 9,3 Km (5,0 NM) shall be applied when a :

- ☐ MEDIUM aircraft is crossing behind a MEDIUM aircraft, at the same altitude or less than 300 m (1 000 ft)
- ☐ LIGHT aircraft is crossing behind a HEAVY aircraft, at the same altitude or less than 300 m (1 000 ft)
- ☒ LIGHT aircraft is crossing behind a MEDIUM aircraft, at the same altitude or less than 300 m (1 000 ft)
- ☒ HEAVY aircraft is crossing behind a HEAVY aircraft, at the same altitude or less than 300 m (1 000 ft)

34

The wake turbulence caused by an aircraft is mainly the result of:

1. An aerodynamic effect (wing tip vortices).
2. The engines action (propellers rotation or engine gas exhausts).
3. The importance of the drag devices (size of the landing gear, of the flaps, etc.).

The combination regrouping all the correct statements is:

☐ 1, 2 and 3.

☐ 1.

☐ 2 and 3.

☒ 3.

35

The flight deck door should be capable of being :

- ☐ remotely locked by cabin crew operation from outside the compartment
- ☒ locked from within the compartment
- ☐ directly locked from outside the compartment
- ☐ remotely locked from either inside or outside the compartment

36

In addition to informing each State, whose citizens are known to be on board an aircraft, the State of the country in which an aircraft has landed after an act of unlawful interference must immediately notify the :

- ☐ State of Registry of the aircraft and the State of the operator only
- ☒ State of Registry of the aircraft and the CAA
- ☐ State of Registry of the aircraft, the State of the operator and ICAO
- ☐ State of the operator, the CAA. and ICAO

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14



37

The authorization for the transport of hazardous materials is specified on the:

☐ airworthiness certificate.

☐ insurance certificate.

☐ registration certificate.

☒ air carrier certificate.

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14



38

The dangerous goods transport document, if required, shall be drawn up by :

- ☐ the operator.
- ☒ the shipper.
- ☐ the handling agent.
- ☒ the captain.

Candidate: Stacy Abey
Date of birth: 1988-10-10

Subject: 070-Operational procedures
Date: 2014-08-14



39

A braking action of 0.25 and below reported on a SNOWTAM is :

☐ good

☐ medium

☒ unreliable

☐ poor

40

In case of landing on a flooded runway and in heavy rain:

1. you increase your approach speed,
2. you land firmly in order to obtain a firm contact of the wheels with the runway and immediately land your nose gear,
3. you decrease your approach speed,
4. you use systematically all the lift dumper devices,
5. you land as smoothly as possible,
6. you brake energetically.

The combination regrouping all the correct statements is:

- ☐ 1, 2, 4
- ☒ 2, 3, 4
- ☐ 1, 4, 5, 6
- ☐ 3, 5


Attachment No. 1

Questions 6

Figure 126

atp_126.jpg

Class C Airspace

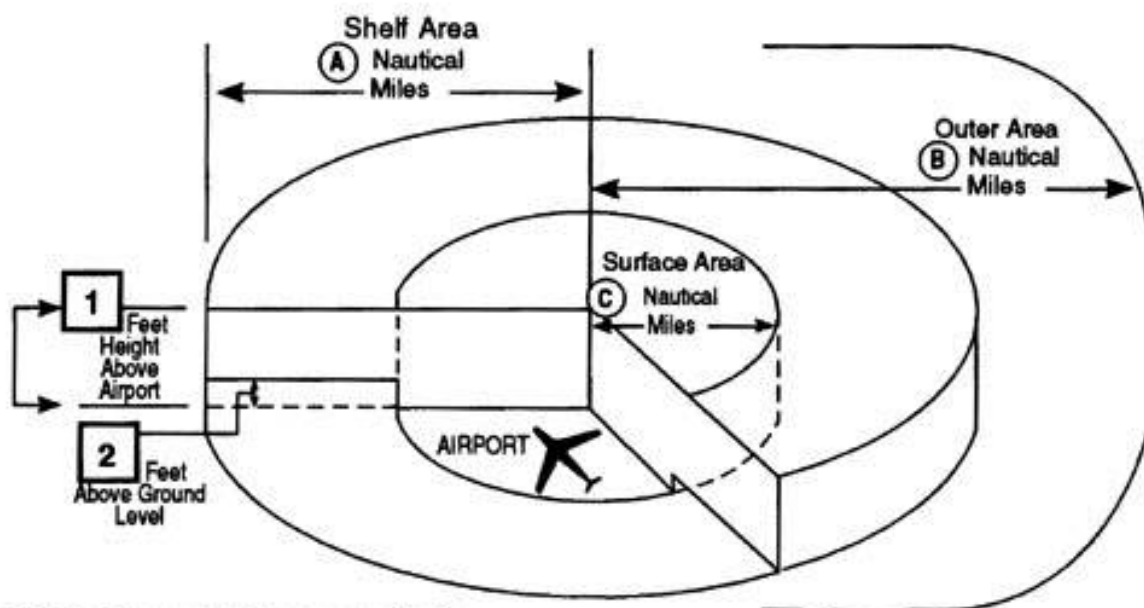

Services upon establishing two-way radio communication and radar contact:

Sequencing Arrivals

IFR/VFR Standard Separation

IFR/VFR Traffic Advisories and Conflict Resolution

VFR/VFR Traffic Advisories

IFR: Instrument Flight Rules
VFR: Visual Flight Rules

Figure 126. Class C Airspace © ASA

