

Online Examination Report

Date:	21.07.2014
Attempts:	1
Examinee:	Ayul, Paul
Date of birth:	11/10/1991
Subject:	070-Operational Procedures
Result:	55 %
Time used:	00:00:12 (HH:MM:SS)

Attachments

1. List of result by question
2. List of result by topic
3. Detailed question result report

Attachment 1: List of result by question

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
1	191	71. OPERATIONAL PROCEDURES		0,00	1,00
2	184	71. OPERATIONAL PROCEDURES		1,00	1,00
3	175	71. OPERATIONAL PROCEDURES		0,00	1,00
4	186	71. OPERATIONAL PROCEDURES		0,00	1,00
5	56	71.1.1 ICAO Annex 6		1,00	1,00
6	118	71.1.1.3 General		0,00	1,00
7	149	71.1.1.3 General		0,00	1,00
8	19	71.1.1.3 General		1,00	1,00
9	167	71.1.3.2 Transoceanic and polar flight		1,00	1,00
10	100	71.2.1 Operations Manual		1,00	1,00
11	107	71.2.1.1 Operating procedures		0,00	1,00
12	34	71.2.1.1 Operating procedures		0,00	1,00
13	112	71.2.1.1 Operating procedures		1,00	1,00
14	148	71.2.2 Icing conditions		0,00	1,00
15	3	71.2.2 Icing conditions		0,00	1,00
16	140	71.2.2.1 On ground de-/anti-icing		1,00	1,00
17	115	71.2.2.1 On ground de-/anti-icing		1,00	1,00
18	114	71.2.2.1 On ground de-/anti-icing		1,00	1,00
19	119	71.2.5 Fire/smoke		1,00	1,00
20	117	71.2.5.3 Fire in the cabin, cockpit, cargo comp		0,00	1,00
21	102	71.2.5.3 Fire in the cabin, cockpit, cargo comp		1,00	1,00
22	89	71.2.5.3 Fire in the cabin, cockpit, cargo comp		0,00	1,00
23	16	71.2.5.6 Types of extinguishers		1,00	1,00
24	141	71.2.5.6 Types of extinguishers		1,00	1,00
25	87	71.2.5.6 Types of extinguishers		0,00	1,00
26	131	71.2.5.6 Types of extinguishers		0,00	1,00
27	98	71.2.5.6 Types of extinguishers		0,00	1,00
28	62	71.2.7 Wind shear and microburst		0,00	1,00

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
29	78	71.2.7.1	Effects and recognition	1,00	1,00
30	86	71.2.7.1	Effects and recognition	1,00	1,00
31	51	71.2.8	Wake turbulence	0,00	1,00
32	166	71.2.8	Wake turbulence	1,00	1,00
33	15	71.2.8.1	Cause	1,00	1,00
34	38	71.2.8.2	List of relevant parameters	0,00	1,00
35	79	71.2.9	Security (unlawful events)	1,00	1,00
36	55	71.2.9.2	Use of SSR	1,00	1,00
37	111	71.2.12	Transport of dangerous goods	1,00	1,00
38	97	71.2.12.1	ICAO Annex 18	1,00	1,00
39	154	71.2.13	Contaminated runways	1,00	1,00
40	67	71.2.13.4	Procedures	0,00	1,00
Total:55%				22,00	40,00

Attachment 2: List of result by topic

Licence

Date: 16.07.2014

Examinee: Ayul, Paul

Location: Uganda Civil Aviation Authority

Your Result: 22,00 from 40,00 Points (55,00 %)

Topics	Ammount of Questions	Points achieved	Maximum Points	Percent
71. OPERATIONAL PROCEDURES	40	22,00	40,00	55,00
71.1. GENERAL REQUIREMENTS	5	3,00	5,00	60,00
71.2. SPECIAL OPERATIONAL PROCEDURES	31	18,00	31,00	58,06
Total	40	22,00	40,00	55,00

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16

1

When landing behind a large jet aircraft, at which point on the runway should you plan to land?

- ☐ At least 1,000 feet beyond the jet's touchdown point.
- ☒ If any crosswind, land on the windward side of the runway and prior to the jet's touchdown point.
- ☐ Beyond the jet's touchdown point.

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16

2

When diverting to an alternate airport because of an emergency, pilots should

- ☒ **apply rule-of-thumb computations, estimates, and other appropriate shortcuts to divert to the new course as soon as possible.**
- ☐ **complete all plotting, measuring, and computations involved before diverting.**
- ☐ **rely upon radio as the primary method of navigation.**

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16



3

(Refer to Figure 126.) Which altitude (box 1) is applicable to the vertical extent of the inner and outer circles (now called surface and shelf areas)?

☐ 3,000 feet AGL.

☐ 4,000 feet above airport.

☒ 3,000 feet above airport.

See Attachments:

1. atp_126.jpg

Figure 126

(Attachment
No.1)

4

Which is a necessary condition for the occurrence of a low-level temperature inversion wind shear?

- ☐ A calm or light wind near the surface and a relatively strong wind just above the inversion.
- ☐ The temperature differential between the cold and warm layers must be at least 10 degrees C.
- ☒ A wind direction difference of at least 30 degrees C between the wind near the surface and the wind just above the inversion.

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16



5

Among the EAC states, the CAA-OPS of Aircraft is based on :

☐ The Civil Aviation Requirements (CAA)

☒ ICAO Annex 6

☐ The air transport rules

☐ A CAA guideline

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16



6

90 % of bird strikes occur :

☒ **between 500 and 1 500 m**

☐ **above 1 000 m**

☐ **between 500 and 1 000 m**

☐ **under 500 m**

7

Which one of the following sets of conditions is most likely to attract birds to an aerodrome ?

- ☐ a modern sewage tip in close proximity
- ☐ the extraction of minerals such as sand and gravel
- ☒ mowing and maintaining the grass long
- ☐ a refuse tip in close proximity

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16

8

During a night flight, an observer located in the cockpit, seeing an aircraft coming from front right on approximate opposite parallel track, will first see the:

- ☐ red light
- ☐ red and white flashing light
- ☐ white light
- ☒ green light

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16

9

What emergency equipment is required for extended overwater operations?

- ☐ A portable survival emergency locator transmitter for each liferaft.
- ☒ A life jacket equipped with a survivor locator light, for each person on the airplane.
- ☐ A pyrotechnic signaling device for each life preserver.

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16

10

Information concerning evacuation procedures can be found in the :

☐ operational flight plan.

☐ flight manual.

☐ journey logbook.

☒ operation manual.

11

For aircraft certified , cockpit voice recorder must keep the conversations and sound alarms recorded during the last :

- ☐ 48 hours of operation.
- ☐ 30 minutes of operation.
- ☐ flight.
- ☒ 25 hours of operation.

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16



12

Flight crew members on the flight deck shall keep their safety belt fastened:

- ☐ only during take off and landing and whenever necessary by the commander in the interest of safety.
- ☒ from take off to landing.
- ☐ only during take off and landing.
- ☐ while at their station.

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16



13

A life jacket is mandatory for any passenger on board an aircraft flying away from the shore by more than :

☐ 400 NM

☐ 100 NM

☐ 200 NM

☒ 50 NM

14

The greatest possibility of ice buildup, while flying under icing conditions, occurs on :

☒ The upper and lower rudder surfaces.

☐ The upper and lower wingsurfaces.

☐ The aircraft front areas.

☐ Only the pitot and static probes.

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16



15

The maximum validity of a SNOWTAM is :

☐ 3 hours

☐ 12 hours

☒ 6 hours

☐ 24 hours

16

An aircraft having undergone an anti-icing procedure and having exceeded the protection time of the anti-icing fluid:

- ☐ must only undergo a new anti-icing procedure for take-off.
- ☐ must only undergo a de-icing procedure for take-off.
- ☒ must undergo a de-icing procedure before a new application of anti-icing fluid for take-off.
- ☐ need not to undergo a new anti-icing procedure for take-off.

17

During an aircraft de-icing/anti-icing procedure:

- ☐ the anti-icing and de-icing fluids are applied hot.
- ☐ the de-icing fluid is applied without heating and the anti-icing fluid is applied hot.
- ☒ the anti-icing fluid is applied without heating and the de-icing fluid is applied hot.
- ☐ the anti-icing and de-icing fluids are applied cold.

18

The anti-icing fluid protecting film can wear off and reduce considerably the protection time:

- ☐ when the airplane is into the wind.
- ☒ during strong winds or as a result of the other aircraft engines jet wash.
- ☐ when the temperature of the airplane skin is close to 0 °C.
- ☐ when the outside temperature is close to 0 °C.

19

The "NO SMOKING" sign must be illuminated :

- ☐ during climb and descent.
- ☐ during take off and landing.
- ☒ when oxygen is being supplied in the cabin.
- ☐ in each cabin section if oxygen is being carried.

20

To extinguish a fire in the cockpit, you use:

- 1. a water fire-extinguisher*
- 2. a powder or chemical fire-extinguisher*
- 3. a halon fire-extinguisher*
- 4. a CO2 fire-extinguisher*

☐ 1, 2

☒ 1, 2, 3, 4

☐ 3, 4

☐ 2, 3, 4

21

If smoke appears in the air conditioning, the first action to take is to :

- ☐ Determine which system is causing the smoke.
- ☒ Put on the mask and goggles.
- ☐ Begin an emergency descent.
- ☐ Cut off all air conditioning units.

22

In case of a fire due to the heating of the brakes, you fight the fire using:

1. a dry powder fire extinguisher

2. a water spray atomizer

3. a water fire-extinguisher

4. a CO2 fire-extinguisher to the maximum

The combination regrouping all the correct statements is:

☒ 1, 4

☐ 2, 3, 4

☐ 1, 2

☐ 3, 4

23

You will use a CO2 fire-extinguisher for :

- 1. a paper fire*
- 2. a plastic fire*
- 3. a hydrocarbon fire*
- 4. an electrical fire*

The combination regrouping all the correct statements is:

☐ 1,2,3

☒ 1,2,3,4

☐ 2,3

☐ 3,4

24

A fire occurs in a wheel and immediate action is required to extinguish it. The safest extinguishant to use is :

☐ CO2 (carbon dioxide)

☐ water

☒ dry powder

☐ foam

25

CO2 type extinguishers are fit to fight:

1 - class A fires

2 - class B fires

3 - electrical source fires

4 - special fires: metals, gas, chemical product

Which of the following combinations contains all the correct statements:

☐ 1 - 3 - 4

☐ 1 - 2 - 4

☒ 1 - 2 - 3

☒ 2 - 3 - 4

26

You will use a halon extinguisher for a fire of:

1 - solids (fabric, plastic, ...)

2 - liquids (alcohol, gasoline, ...)

3 - gas

4 - metals (aluminium, magnesium, ...)

The combination regrouping all the correct statements

☐ 2,3,4

☐ 1,2,3

☐ 1,2,3,4

☒ 1,2,4

27

A CO2 fire extinguisher can be used for:

- 1. a paper fire*
- 2. a hydrocarbon fire*
- 3. a fabric fire*
- 4. an electrical fire*
- 5. a wood fire*

The combination regrouping all the correct statements

☐ 1, 2, 3, 4, 5

☒ 1, 3, 5

☐ 2, 4, 5

☐ 2, 3, 4

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16

28

In final approach, you encounter a strong rear wind gust or strong down wind which forces you to go around. You

1- maintain the same aircraft configuration (gear and flaps)

2- reduce the drags (gear and flaps)

3- gradually increase the attitude up to triggering of stick shaker

4- avoid excessive attitude change The combination of correct statements is :

☐ 2,3

☐ 1,3

☐ 1,4

☒ 2,4

29

During a manual approach, the aeroplane is subjected to windshear with an increasing tail wind. In the absence of a pilot action, the aeroplane:

- 1- flies above the intended approach path**
- 2- flies below the intended approach path**
- 3- has an increasing true airspeed**
- 4- has a decreasing true airspeed**

The combination of correct statements is:

☐ **2, 3.**

☐ **1, 4.**

☒ **2, 4.**

☐ **1, 3.**

30

Wind shear is:

- ☐ a variation in vertical or horizontal wind velocity and / or wind direction over a large distance.
- ☒ a large variation in vertical or horizontal wind velocity and / or wind direction over a short distance.
- ☐ a variation only in vertical wind velocity over a short distance.
- ☐ a variation only in horizontal wind velocity over a short distance.

31

According with DOC 4444 (ICAO), a wake turbulence radar separation minima of 9,3 Km (5,0 NM) shall be applied when a :

- ☒ **LIGHT aircraft is crossing behind a HEAVY aircraft, at the same altitude or less than 300 m (1 000 ft)**
- ☐ **HEAVY aircraft is crossing behind a HEAVY aircraft, at the same altitude or less than 300 m (1 000 ft)**
- ☐ **LIGHT aircraft is crossing behind a MEDIUM aircraft, at the same altitude or less than 300 m (1 000.ft)**
- ☐ **MEDIUM aircraft is crossing behind a MEDIUM aircraft, at the same altitude or less than 300 n (1 000 ft)**

32

When taking-off after a widebody aircraft which has just landed, you should take-off :

- ☐ at the point where the aircraft's wheels have touched the ground and on the underwind side of the runway .
- ☐ at the point where the aircraft's wheels have touched down and on the wind side of the runway .
- ☐ in front of the point where the aircraft's wheels have touched down.
- ☒ beyond the point where the aircraft's wheels have touched down.

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16

33

Aeroplane wake turbulence during take off starts when:

- ☐ slats and flaps are extended only.
- ☐ the take off roll commences.
- ☒ the nose wheel lifts off the runway.
- ☐ out of ground effect.

34

The greatest wake turbulence occurs when the generating aircraft is:

- ☐ Small, light, at maximum speed in full flaps configuration
- ☐ Large, heavy, at low speed in clean configuration
- ☐ Small, light, at low speed in clean configuration
- ☒ Large, heavy, at maximum speed in full flaps configuration

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16

35

What transponder code should be used to provide recognition of an aircraft which is being subjected to unlawful interference :

☐ code 2000

☐ code 7600

☐ code 7700

☒ code 7500

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16



36

What is the transponder code to be used by the commander of an aircraft that is subject to unlawful interference?

☐ A 7600

☐ A 7800

☐ A 7700

☒ A 7500

37

ICAO (International Civil Aviation Organization) Appendix 18 is a document dealing with

:

☒ the safety of the air transport of dangerous goods

☐ the technical operational use of aircraft

☐ the noise pollution of aircraft

☐ the air transport of live animals

Candidate: Paul Ayul
Date of birth: 1991-11-10

Subject: 070-Operational Procedures
Date: 2014-07-16



38

In addition to the languages required by the State of Origin, what language should be set for the markings related to dangerous goods :

☐ English, French or Spanish

☐ French

☐ Spanish

☒ English

39

According to the civil aviation regulations a runway is considered damp when:

- ☐ it is covered with a film of water of less than 1 mm.
- ☐ it is covered with a film of water of less than 3 mm.
- ☐ surface moisture gives it a shiny appearance.
- ☒ its surface is not dry, and when surface moisture does not give it a shiny appearance.

40

In case of landing on a flooded runway and in heavy rain:

1. you increase your approach speed,
2. you land firmly in order to obtain a firm contact of the wheels with the runway and immediately land your nose gear,
3. you decrease your approach speed,
4. you use systematically all the lift dumper devices,
5. you land as smoothly as possible,
6. you brake energetically.

The combination regrouping all the correct statements is:

☒ 3, 5

☐ 1, 4, 5, 6

☐ 2, 3, 4

☐ 1, 2, 4


Attachment No. 1

Questions 3

Figure 126

atp_126.jpg

Class C Airspace

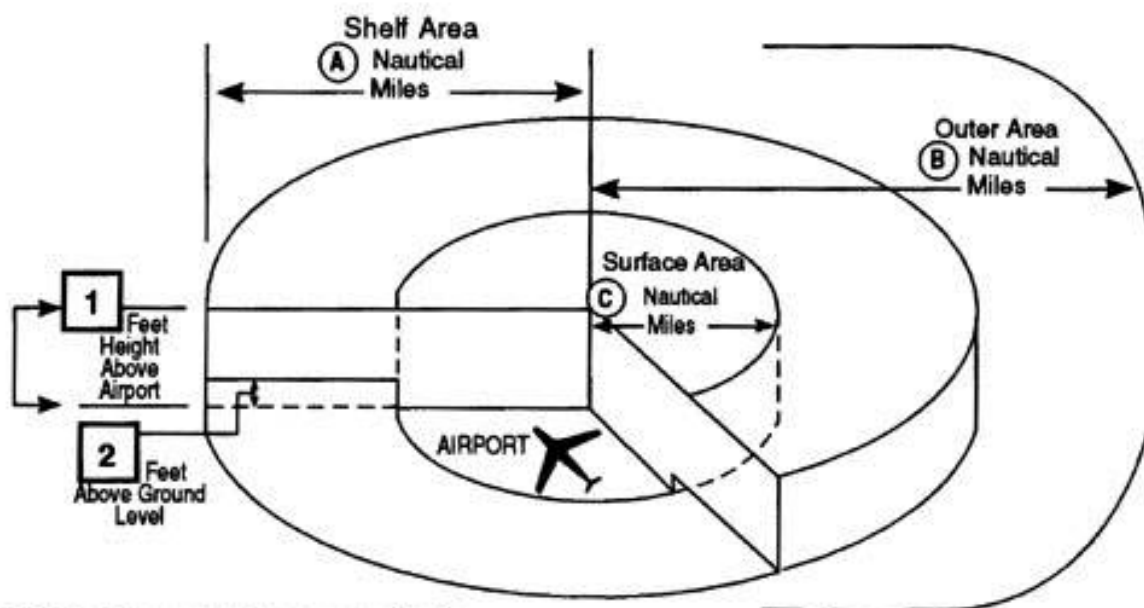

Services upon establishing two-way radio communication and radar contact:

Sequencing Arrivals

IFR/VFR Standard Separation

IFR/VFR Traffic Advisories and Conflict Resolution

VFR/VFR Traffic Advisories

IFR: Instrument Flight Rules
VFR: Visual Flight Rules

Figure 126. Class C Airspace © ASA