
Online Examination Report

Date:	21.07.2014
Attempts:	1
Examinee:	RWASHANDE, Seith
Date of birth:	2/4/1990
Subject:	070-Operational Procedures
Result:	30 %
Time used:	00:00:12 (HH:MM:SS)

Attachments

1. List of result by question
2. List of result by topic
3. Detailed question result report

Attachment 1: List of result by question

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
1	184	71. OPERATIONAL PROCEDURES		0,00	1,00
2	175	71. OPERATIONAL PROCEDURES		1,00	1,00
3	180	71. OPERATIONAL PROCEDURES		0,00	1,00
4	186	71. OPERATIONAL PROCEDURES		1,00	1,00
5	174	71. OPERATIONAL PROCEDURES		0,00	1,00
6	56	71.1.1 ICAO Annex 6		1,00	1,00
7	19	71.1.1.3 General		1,00	1,00
8	118	71.1.1.3 General		0,00	1,00
9	167	71.1.3.2 Transoceanic and polar flight		1,00	1,00
10	100	71.2.1 Operations Manual		1,00	1,00
11	34	71.2.1.1 Operating procedures		0,00	1,00
12	107	71.2.1.1 Operating procedures		0,00	1,00
13	112	71.2.1.1 Operating procedures		0,00	1,00
14	148	71.2.2 Icing conditions		0,00	1,00
15	3	71.2.2 Icing conditions		0,00	1,00
16	140	71.2.2.1 On ground de-/anti-icing		1,00	1,00
17	143	71.2.2.1 On ground de-/anti-icing		0,00	1,00
18	115	71.2.2.1 On ground de-/anti-icing		0,00	1,00
19	144	71.2.4.2 Influence of the flight procedure		0,00	1,00
20	119	71.2.5 Fire/smoke		0,00	1,00
21	37	71.2.5.3 Fire in the cabin, cockpit, cargo comp		0,00	1,00
22	102	71.2.5.3 Fire in the cabin, cockpit, cargo comp		0,00	1,00
23	98	71.2.5.6 Types of extinguishers		0,00	1,00
24	16	71.2.5.6 Types of extinguishers		1,00	1,00
25	87	71.2.5.6 Types of extinguishers		1,00	1,00
26	131	71.2.5.6 Types of extinguishers		0,00	1,00
27	11	71.2.7 Wind shear and microburst		0,00	1,00
28	62	71.2.7 Wind shear and microburst		0,00	1,00

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
29	86	71.2.7.1	Effects and recognition	1,00	1,00
30	78	71.2.7.1	Effects and recognition	0,00	1,00
31	51	71.2.8	Wake turbulence	0,00	1,00
32	166	71.2.8	Wake turbulence	0,00	1,00
33	162	71.2.8	Wake turbulence	0,00	1,00
34	15	71.2.8.1	Cause	0,00	1,00
35	38	71.2.8.2	List of relevant parameters	0,00	1,00
36	79	71.2.9	Security (unlawful events)	1,00	1,00
37	55	71.2.9.2	Use of SSR	0,00	1,00
38	97	71.2.12.1	ICAO Annex 18	1,00	1,00
39	154	71.2.13	Contaminated runways	0,00	1,00
40	67	71.2.13.4	Procedures	0,00	1,00
Total:30%				12,00	40,00

Attachment 2: List of result by topic

Licence

Date: 16.07.2014

Examinee: RWASHANDE, Seith

Location: Uganda Civil Aviation Authority

Your Result: 12,00 from 40,00 Points (30,00 %)

Topics	Ammount of Questions	Points achieved	Maximum Points	Percent
71. OPERATIONAL PROCEDURES	40	12,00	40,00	30,00
71.1. GENERAL REQUIREMENTS	4	3,00	4,00	75,00
71.2. SPECIAL OPERATIONAL PROCEDURES	31	7,00	31,00	22,58
Total	40	12,00	40,00	30,00

1

When diverting to an alternate airport because of an emergency, pilots should

- ☐ rely upon radio as the primary method of navigation.
- ☐ apply rule-of-thumb computations, estimates, and other appropriate shortcuts to divert to the new course as soon as possible.
- ☒ complete all plotting, measuring, and computations involved before diverting.

Candidate: Seith RWASHANDE
Date of birth: 1990-02-04

Subject: 070-Operational Procedures
Date: 2014-07-16



2

(Refer to Figure 126.) Which altitude (box 1) is applicable to the vertical extent of the inner and outer circles (now called surface and shelf areas)?

☒ 4,000 feet above airport.

☐ 3,000 feet above airport.

☐ 3,000 feet AGL.

See Attachments:

1. atp_126.jpg

Figure 126

(Attachment
No.1)

3

What aural and visual indications should be observed over an ILS outer marker?

- ☒ **Alternate dots and dashes at the rate of two per second.**
- ☐ **Continuous dashes at the rate of two per second.**
- ☐ **Continuous dots at the rate of six per second.**

4

Which is a necessary condition for the occurrence of a low-level temperature inversion wind shear?

- ☐ The temperature differential between the cold and warm layers must be at least 10 degrees C.
- ☐ A wind direction difference of at least 30 degrees C between the wind near the surface and the wind just above the inversion.
- ☒ A calm or light wind near the surface and a relatively strong wind just above the inversion.

5

Which incident would require that the nearest Flight Control Center field office be notified immediately?

- ☒ In-flight fire.
- ☐ Fire of the primary aircraft while in a hangar which results in damage to other property of more than \$25,000.
- ☒ Ground fire resulting in fire equipment dispatch.

6

Among the EAC states, the CAA-OPS of Aircraft is based on :

- ☒ ICAO Annex 6
- ☐ A CAA guideline
- ☐ The Civil Aviation Requirements (CAA)
- ☐ The air transport rules

7

During a night flight, an observer located in the cockpit, seeing an aircraft coming from front right on approximate opposite parallel track, will first see the:

- ☒ green light
- ☐ white light
- ☐ red and white flashing light
- ☐ red light

8

90 % of bird strikes occur :

- ☐ above 1 000 m
- ☐ between 500 and 1 000 m
- ☐ under 500 m
- ☒ between 500 and 1 500 m

9

What emergency equipment is required for extended overwater operations?

- ☐ A pyrotechnic signaling device for each life preserver.
- ☒ A life jacket equipped with a survivor locator light, for each person on the airplane.
- ☐ A portable survival emergency locator transmitter for each liferaft.

10

Information concerning evacuation procedures can be found in the :

- ☐ flight manual.
- ☒ operation manual.
- ☐ operational flight plan.
- ☐ journey logbook.

11

Flight crew members on the flight deck shall keep their safety belt fastened:

- ☐ while at their station.
- ☒ only during take off and landing and whenever necessary by the commander in the interest of safety.
- ☐ only during take off and landing.
- ☐ from take off to landing.

12

For aircraft certified , cockpit voice recorder must keep the conversations and sound alarms recorded during the last :

- ☐ 25 hours of operation.
- ☒ 48 hours of operation.
- ☐ flight.
- ☐ 30 minutes of operation.

13

A life jacket is mandatory for any passenger on board an aircraft flying away from the shore by more than :

☐ 100 NM

☐ 50 NM

☐ 400 NM

☒ 200 NM

14

The greatest possibility of ice buildup, while flying under icing conditions, occurs on :

- ☐ The upper and lower wingsurfaces.
- ☒ Only the pitot and static probes.
- ☐ The aircraft front areas.
- ☐ The upper and lower rudder surfaces.

15

The maximum validity of a SNOWTAM is :

☒ 12 hours

☐ 24 hours

☐ 3 hours

☐ 6 hours

16

An aircraft having undergone an anti-icing procedure and having exceeded the protection time of the anti-icing fluid:

- ☐ must only undergo a de-icing procedure for take-off.
- ☐ need not to undergo a new anti-icing procedure for take-off.
- ☐ must only undergo a new anti-icing procedure for take-off.
- ☒ must undergo a de-icing procedure before a new application of anti-icing fluid for take-off.

17

For a given ambient temperature and type of de-icing fluid used, in which one of the following types of weather condition will the holdover (protection) time be shortest ?

☐ Freezing rain

☐ Freezing fog

☒ Frost

☐ Steady snow

18

During an aircraft de-icing/anti-icing procedure:

- ☒ the de-icing fluid is applied without heating and the anti-icing fluid is applied hot.
- ☐ the anti-icing fluid is applied without heating and the de-icing fluid is applied hot.
- ☐ the anti-icing and de-icing fluids are applied cold.
- ☐ the anti-icing and de-icing fluids are applied hot.

19

As regards the detection of bird strike hazard, the pilot's means of information and prevention are:

1 - ATIS.

2 - NOTAMs.

3- BIRDTAMs.

4 - Weather radar.,

☐ 1,2,3,4,5

☐ 2,5

☐ 1,2,5

☒ 1,3,4

20

The "NO SMOKING" sign must be illuminated :

- ☒ during take off and landing.
- ☐ when oxygen is being supplied in the cabin.
- ☐ in each cabin section if oxygen is being carried.
- ☐ during climb and descent.

21

Beneath fire extinguishers the following equipment for fire fighting is on board:

- ☒ a big bunch of fire extinguishing blankets.
- ☐ water and all type of beverage.
- ☐ a hydraulic winch and a big box of tools.
- ☐ crash axes or crowbars.

22

If smoke appears in the air conditioning, the first action to take is to :

- ☒ Put on the mask and goggles.
- ☐ Cut off all air conditioning units.
- ☐ Determine which system is causing the smoke.
- ☒ Begin an emergency descent.

23

A CO2 fire extinguisher can be used for:

- 1. a paper fire*
- 2. a hydrocarbon fire*
- 3. a fabric fire*
- 4. an electrical fire*
- 5. a wood fire*

The combination regrouping all the correct statements

☐ 2, 3, 4

☐ 1, 2, 3, 4, 5

☐ 2, 4, 5

☒ 1, 3, 5

24

You will use a CO2 fire-extinguisher for :

- 1. a paper fire*
- 2. a plastic fire*
- 3. a hydrocarbon fire*
- 4. an electrical fire*

The combination regrouping all the correct statements is:

☐ 3,4

☐ 2,3

☒ 1,2,3,4

☐ 1,2,3

25

CO2 type extinguishers are fit to fight:

1 - class A fires

2 - class B fires

3 - electrical source fires

4 - special fires: metals, gas, chemical product

Which of the following combinations contains all the correct statements:

☐ 2 - 3 - 4

☒ 1 - 2 - 3

☐ 1 - 2 - 4

☐ 1 - 3 - 4

26

You will use a halon extinguisher for a fire of:

1 - solids (fabric, plastic, ...)

2 - liquids (alcohol, gasoline, ...)

3 - gas

4 - metals (aluminium, magnesium, ...)

The combination regrouping all the correct statements

☐ 1,2,3

☐ 1,2,3,4

☒ 1,2,4

☐ 2,3,4

27

One of the main characteristics of windshear is that it :

- ☐ can occur at any altitude and only in the horizontal plane
- ☒ occurs only at a low altitude (2000 ft) and never in the vertical plane
- ☐ can occur at any altitude in both the vertical and horizontal planes
- ☐ occurs only at a low altitude (2000 ft) and never in the horizontal plane

28

In final approach, you encounter a strong rear wind gust or strong down wind which forces you to go around. You
1- maintain the same aircraft configuration (gear and flaps)
2- reduce the drags (gear and flaps)
3- gradually increase the attitude up to triggering of stick shaker
4- avoid excessive attitude change The combination of correct statements is :

☐ 1,3

☐ 1,4

☐ 2,4

☒ 2,3

29

Wind shear is:

- ☐ a variation only in horizontal wind velocity over a short distance.
- ☐ a variation in vertical or horizontal wind velocity and / or wind direction over a large distance.
- ☐ a variation only in vertical wind velocity over a short distance.
- ☒ a large variation in vertical or horizontal wind velocity and / or wind direction over a short distance.

30

During a manual approach, the aeroplane is subjected to windshear with an increasing tail wind. In the absence of a pilot action, the aeroplane:

- 1- flies above the intended approach path**
- 2- flies below the intended approach path**
- 3- has an increasing true airspeed**
- 4- has a decreasing true airspeed**

The combination of correct statements is:

☐ **1, 4.**

☐ **2, 4.**

☐ **1, 3.**

☒ **2, 3.**

31

According with DOC 4444 (ICAO), a wake turbulence radar separation minima of 9,3 Km (5,0 NM) shall be applied when a :

- ☐ MEDIUM aircraft is crossing behind a MEDIUM aircraft, at the same altitude or less than 300 m (1 000 ft)
- ☒ LIGHT aircraft is crossing behind a HEAVY aircraft, at the same altitude or less than 300 m (1 000 ft)
- ☐ LIGHT aircraft is crossing behind a MEDIUM aircraft, at the same altitude or less than 300 m (1 000 ft)
- ☐ HEAVY aircraft is crossing behind a HEAVY aircraft, at the same altitude or less than 300 m (1 000 ft)

32

When taking-off after a widebody aircraft which has just landed, you should take-off :

- ☒ at the point where the aircraft's wheels have touched down and on the wind side of the runway .
- ☐ beyond the point where the aircraft's wheels have touched down.
- ☐ in front of the point where the aircraft's wheels have touched down.
- ☐ at the point where the aircraft's wheels have touched the ground and on the underwind side of the runway .

33

The greatest wake turbulence occurs when the generating aircraft is :

- ☒ Small, light, at maximum speed in full flaps configuration
- ☐ Small, light, at low speed in clean configuration
- ☐ Large, heavy, at maximum speed in full flaps configuration
- ☐ Large, heavy, at low speed in clean configuration

34

Aeroplane wake turbulence during take off starts when:

- ☐ the take off roll commences.
- ☐ out of ground effect.
- ☒ the nose wheel lifts off the runway.
- ☒ slats and flaps are extended only.

35

The greatest wake turbulence occurs when the generating aircraft is:

- ☐ Large, heavy, at maximum speed in full flaps configuration
- ☒ Small, light, at maximum speed in full flaps configuration
- ☐ Small, light, at low speed in clean configuration
- ☐ Large, heavy, at low speed in clean configuration

Candidate: Seith RWASHANDE
Date of birth: 1990-02-04

Subject: 070-Operational Procedures
Date: 2014-07-16



36

What transponder code should be used to provide recognition of an aircraft which is being subjected to unlawful interference :

☐ code 7600

☐ code 7700

☒ code 7500

☐ code 2000

Candidate: Seith RWASHANDE
Date of birth: 1990-02-04

Subject: 070-Operational Procedures
Date: 2014-07-16



37

What is the transponder code to be used by the commander of an aircraft that is subject to unlawful interference?

☐ A 7500

☐ A 7700

☐ A 7800

☒ A 7600

38

In addition to the languages required by the State of Origin, what language should be set for the markings related to dangerous goods :

☐ French

☒ English

☐ English, French or Spanish

☐ Spanish

39

According to the civil aviation regulations a runway is considered damp when:

- ☒ it is covered with a film of water of less than 3 mm.
- ☐ its surface is not dry, and when surface moisture does not give it a shiny appearance.
- ☐ surface moisture gives it a shiny appearance.
- ☐ it is covered with a film of water of less than 1 mm.

40

In case of landing on a flooded runway and in heavy rain:

1. you increase your approach speed,
2. you land firmly in order to obtain a firm contact of the wheels with the runway and immediately land your nose gear,
3. you decrease your approach speed,
4. you use systematically all the lift dumper devices,
5. you land as smoothly as possible,
6. you brake energetically.

The combination regrouping all the correct statements is:

- ☒ 1, 2, 4
- ☐ 2, 3, 4
- ☐ 1, 4, 5, 6
- ☒ 3, 5


Attachment No. 1

Questions 2

Figure 126

atp_126.jpg

Class C Airspace

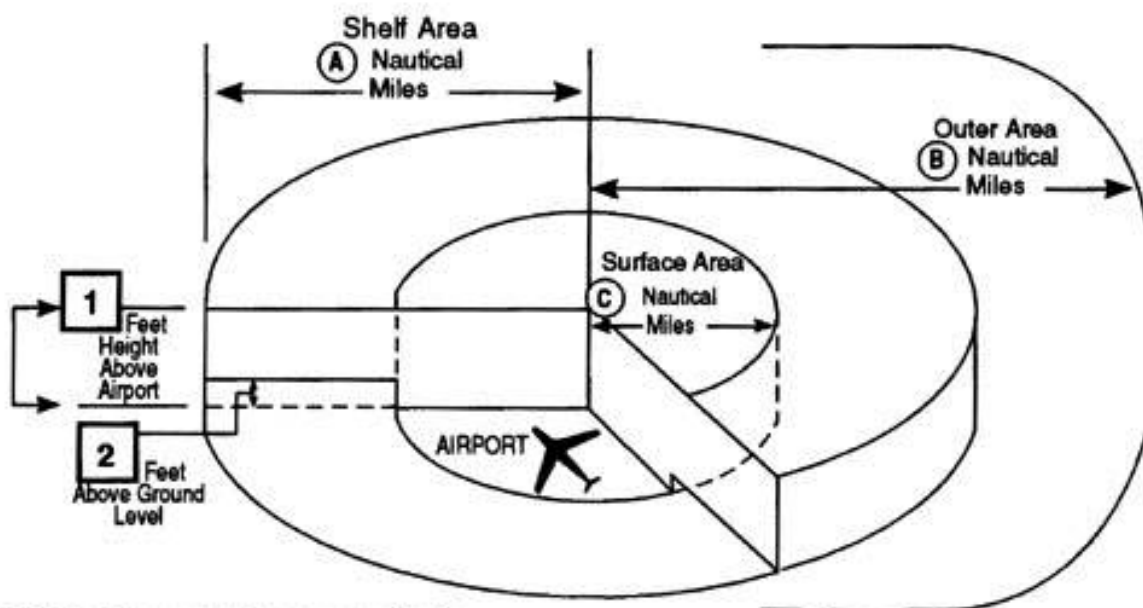

Services upon establishing two-way radio communication and radar contact:

Sequencing Arrivals

IFR/VFR Standard Separation

IFR/VFR Traffic Advisories and Conflict Resolution

VFR/VFR Traffic Advisories

IFR: Instrument Flight Rules
VFR: Visual Flight Rules

Figure 126. Class C Airspace © ASA