
Online Examination Report

Date:	15.08.2014
Attempts:	1
Examinee:	Mwakagile, Faraja
Date of birth:	7/27/1979
Subject:	010-Air Law
Result:	38,99 %
Time used:	00:01:00 (HH:MM:SS)

Attachments

1. List of result by question
2. List of result by topic
3. Detailed question result report

Attachment 1: List of result by question

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
1	879	10. AIR LAW		1,00	1,00
2	460	10. AIR LAW		1,00	1,00
3	199	10. AIR LAW		1,00	1,00
4	455	10. AIR LAW		0,00	1,00
5	227	10. AIR LAW		0,00	1,00
6	577	10. AIR LAW		0,00	1,00
7	623	10. AIR LAW		0,00	1,00
8	551	10. AIR LAW		0,00	1,00
9	548	10. AIR LAW		0,00	1,00
10	865	10. AIR LAW		0,00	1,00
11	466	10. AIR LAW		0,00	1,00
12	396	10. AIR LAW		1,00	1,00
13	124	10. AIR LAW		0,00	1,00
14	309	10. AIR LAW		1,00	1,00
15	602	10. AIR LAW		1,00	1,00
16	265	10. AIR LAW		0,00	1,00
17	654	10. AIR LAW		0,00	1,00
18	423	10. AIR LAW		1,00	1,00
19	443	10. AIR LAW		0,00	1,00
20	611	10. AIR LAW		0,00	1,00
21	192	10. AIR LAW		1,00	1,00
22	225	10. AIR LAW		0,00	1,00
23	527	10. AIR LAW		0,00	1,00
24	877	10. AIR LAW		1,00	1,00
25	870	10. AIR LAW		1,00	1,00
26	674	10. AIR LAW		1,00	1,00
27	426	10. AIR LAW		1,00	1,00
28	42	10. AIR LAW		0,00	1,00

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
29	746	10.	AIR LAW	0,00	1,00
30	571	10.	AIR LAW	0,00	1,00
31	601	10.	AIR LAW	1,00	1,00
32	887	10.	AIR LAW	0,00	1,00
33	156	10.	AIR LAW	0,00	1,00
34	174	10.	AIR LAW	1,00	1,00
35	609	10.	AIR LAW	0,00	1,00
36	581	10.	AIR LAW	1,00	1,00
37	20	10.7.2.17	Radar services	0,00	1,00
38	86	10.7.2.17	Radar services	0,00	1,00
39	100	10.8.4	Integrated Aeronautical Information Package	0,00	2,00
40	110	10.9.5.2	Lighting of objects	1,00	1,00
Total:39%				16,00	41,00

Attachment 2: List of result by topic

Licence

Date: 15.08.2014

Examinee: Mwakagile, Faraja

Location: Uganda Civil Aviation Authority

Your Result: 16,00 from 41,00 Points (39,02 %)

Topics	Ammount of Questions	Points achieved	Maximum Points	Percent
10. AIR LAW	40	16,00	41,00	39,02
10.7. PROCEDURES FOR ANS - AIRCRAFT OPERATIONS (PANS OPS)	2	0,00	2,00	0,00
10.8. AIR TRAFFIC SERVICES AND AIR TRAFFIC MANAGEMENT	1	0,00	2,00	0,00
10.9. AERONAUTICAL INFORMATION SERVICE	1	1,00	1,00	100,00
Total	40	16,00	41,00	39,02

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15



1

Which of these is the latest date that a flight engineer in East Africa may perform duties if his or her last medical examination was a first-class conducted on August 25, 1999?

☐ August 31, 2000.

☒ August 24, 2000.

☐ September 30, 2000.

2

What limitation is imposed on a newly certificated commercial airplane pilot if that person does not hold an instrument pilot rating?

- ☐ The carrying of passengers for hire on cross-country flights is limited to 50 NM for night flights, but not limited for day flights.
- ☐ The carrying of passengers or property for hire on cross-country flights at night is limited to a radius of 50 nautical miles (NM).
- ☒ The carrying of passengers for hire on cross-country flights is limited to 50 NM and the carrying of passengers for hire at night is prohibited.

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15



3

Who is responsible for obtaining information on meteorological conditions?

- ☐ Aircraft dispatcher.
- ☐ Director of operations or flight follower.
- ☒ Pilot in command.

4

A pilot approaching to land a turbine-powered aircraft on a runway served by a VASI shall

- ☐ maintain an altitude at or above the glide slope until a lower altitude is necessary for a safe landing.
- ☐ use the VASI only when weather conditions are below basic VFR.
- ☒ not use the VASI unless a clearance for a VASI approach is received.

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15

5

When should notification of an aircraft accident be made to the responsible authority if there was substantial damage and no injuries?

☒ **Within 10 days.**

☐ **Within 30 days.**

☐ **Immediately.**

6

For aircraft other than helicopters, what minimum conditions must exist at the destination airport to avoid listing an alternate airport on an IFR flight plan when a standard IAP is available?

- ☒ From 2 hours before to 2 hours after ETA, forecast ceiling 3,000, and visibility 3 miles.
- ☐ From 1 hour before to 1 hour after ETA, forecast ceiling 2,000, and visibility 3 miles.
- ☐ From 2 hours before to 2 hours after ETA, forecast ceiling 2,000, and visibility 2 and 1/2 miles.

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15



7

En route at FL290, the altimeter is set correctly, but not reset to the local altimeter setting of 30.57" Hg during descent. If the field elevation is 650 feet and the altimeter is functioning properly, what is the approximate indication upon landing?

☐ 1,300 feet.

☐ Sea level.

☒ 715 feet.

8

If a visual descent point (VDP) is published on a GPS approach, it

- ☒ will not be included in the sequence of waypoints.
- ☐ will be coded in the waypoint sequence and identified using ATD.
- ☒ must be included in the normal waypoints.

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15



9

What minimum navigation equipment is required for IFR flight?

- ☒ VOR/LOC receiver, transponder, and DME.
- ☐ Navigation equipment appropriate to the ground facilities to be used.
- ☐ VOR receiver and, if in ARTS III environment, a coded transponder equipped for altitude reporting.

10

What international Morse Code identifier is used to identify a specific interim standard microwave landing system?

- ☒ A three letter Morse Code identifier preceded by the Morse Code for the letters 'ML.'
- ☐ A three letter Morse Code identifier preceded by the Morse Code for the letter 'M.'
- ☐ A two letter Morse Code identifier preceded by the Morse Code for the letters 'IM.'

11

Under which condition, if any, may a pilot descend below DH or MDA when using the approach light system as the primary visual reference for the intended runway?

- ☒ **Under no condition can the approach light system serve as a necessary visual reference for descent below DH or MDA.**
- ☐ **The approach light system can be used as a visual reference, except that descent below 100 feet above TDZE requires that the red light bars be visible and identifiable.**
- ☐ **Descent to the intended runway is authorized as long as any portion of the approach light system can be seen.**

12

The recommended entry position to an airport traffic pattern is

- ☐ 45 degrees to the base leg just below traffic pattern altitude.
- ☐ to cross directly over the airport at traffic pattern altitude and join the downwind leg.
- ☒ to enter 45 degrees at the midpoint of the downwind leg at traffic pattern altitude.

13

Which of the following applies to the carriage of a person in the custody of law enforcement personnel?

- ☒ **The air carrier is not allowed to serve beverages to the person in custody or the law enforcement escort.**
- ☐ **The person in custody must be seated between the escort and the aisle.**
- ☐ **No more than one person considered to be in the maximum risk category may be carried on a flight, and that person must have at least two armed law enforcement escorts.**

14

If an aircraft is not equipped with an electrical or anticollision light system, no person may operate that aircraft

☒ **after sunset to sunrise.**

☐ **1 hour after sunset.**

☐ **after dark.**

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15

15

From what source can you obtain the latest FDC NOTAM's?

- ☒ CAA Flight Control Center
- ☐ Airport/Facility Directory.
- ☐ Notices to Airmen Publications.

16

To act as pilot in command of an airplane towing a glider, a pilot must have accomplished, within the preceding 12 months, at least

- ☐ three actual or simulated glider tows while accompanied by a qualified tow pilot.
- ☐ three actual glider tows under the supervision of a qualified tow pilot.
- ☒ ten flights as pilot in command of an aircraft while towing a glider.

17

If you are departing from an airport where you cannot obtain an altimeter setting, you should set your altimeter

☒ on 29.92" Hg.

☐ to the airport elevation.

☐ on the current airport barometric pressure, if known.

18

What purpose does the taxiway location sign serve?

- ☐ Provides general taxiing direction to named runway.
- ☒ Identifies taxiway on which an aircraft is located.
- ☐ Denotes entrance to runway from a taxiway.

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15

19

How long is cockpit voice recorder and flight recorder data kept, in the event of an accident or occurrence resulting in terminating the flight?

☐ 90 days.

☒ 30 days.

☐ 60 days.

20

Upon intercepting the assigned radial, the controller advises you that you are on the airway and to 'RESUME OWN NAVIGATION.' This phrase means that

- ☐ you are to assume responsibility for your own navigation.
- ☒ radar services are terminated and you will be responsible for position reports.
- ☐ you are still in radar contact, but must make position reports.

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15



21

When a commercial airtransport airplane lands at an intermediate airport at 1822Z, what is the latest time it may continue a flight without receiving a redispach authorization?

☐ 1922Z.

☒ 0022Z.

☐ 1952Z.

22

While taxiing on the parking ramp, the landing gear, wheel, and tire are damaged by striking ground equipment. What action would be required to comply with the operation of aircraft regulations in the East African region?

- ☒ **An immediate notification must be filed by the operator of the aircraft with the nearest NTSB field office.**
- ☐ **No notification or report is required.**
- ☐ **A report must be filed with the nearest CAA field office within 7 days.**

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15

23

Civil aircraft holding at an altitude of 14,000 feet at a military or joint civil/military use airport should expect to operate at which holding pattern airspeed?

☐ 260 knots.

☒ 250 knots.

☐ 230 knots.

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15

24

In the movement area of an airport, what does a "Destination" sign indicate?

- ☐ Direction from taxiway to runway.
- ☐ Direction from ramp to taxiway.
- ☒ Direction to the takeoff runway.

25

The 'No Entry' sign identifies

- ☐ an area that does not continue beyond intersection.
- ☒ paved area where aircraft entry is prohibited.
- ☐ the exit boundary for the runway protected area.

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15

26

(Refer to Figure 93.) Which altitude is the upper limit for Class A airspace?

See Attachments:

1. instrument_93.jpg

figure 93

(Attachment
No.1)

☐ 14,500 feet MSL.

☒ 60,000 feet MSL.

☐ 18,000 feet MSL.

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15

27

(Refer to Figure 56.) You have requested taxi instructions for takeoff using Runway 16. The controller issues the following taxi instructions: "5H-ABC, Taxi to runway 16." Where are you required to stop in order to be in compliance with the controller's instructions

☐ 6 (Six).

☒ 5 (Five).

☐ 9 (Nine).

See Attachments:

1. cfi_56.jpg

FIGURE 56

(Attachment
No.2)

28

If a certificate holder deviates from the provisions of regulations which pertain to medical use of oxygen by passengers, a complete report of the incident shall be sent to the Authority within

☐ 10 working days.

☒ 10 days of the deviation.

☐ 7 working days.

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15

29

When simultaneous approaches are in progress, how does each pilot receive radar advisories?

- ☒ On tower frequency.
- ☐ One pilot on tower frequency and the other on approach control frequency.
- ☒ On approach control frequency.

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15

30

Which types of airspace are depicted on the En Route Low Altitude Chart?

- ☐ Limits of controlled airspace, military training routes and special use airspace.
- ☐ Special use airspace, Class E, Class D, Class A, Class B and Class C.
- ☒ Class A, special use airspace, Class D and Class E.

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15



31

The most current en route and destination flight information for planning an instrument flight should be obtained from

- ☐ the ATIS broadcast.
- ☐ Notices to Airmen (Class II).
- ☒ the Flight Control Center

32

Unless suspended or revoked, a flight engineer licence in East Africa:

- ☒ expires 1 to 2 years after the month of issuance depending on age
- ☐ expires at the end of the 24th month following the month of issuance or renewal.
- ☒ is issued without a specific expiration date.

33

What are the line check requirements for the pilot in command for a domestic air carrier?

- ☒ The line check is required every 12 months in each type aircraft in which the pilot may fly.
- ☐ The line check is required only when the pilot is scheduled to fly into special areas and airports.
- ☐ The line check is required every 12 calendar months in one of the types of airplanes to be flown.

34

If an engine's rotation is stopped in flight, the pilot in command must report it, as soon as practicable, to the

- ☐ nearest CAA office.
- ☒ appropriate ground radio station.
- ☐ operations manager (or director of operations).

35

During a flight, the controller advises 'traffic 2 o'clock 5 miles southbound.' The pilot is holding 20 correction for a crosswind from the right. Where should the pilot look for the traffic?

☒ 20 degrees to the right of the aircraft's nose.

☐ Straight ahead.

☐ 40 degrees to the right of the aircraft's nose.

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 010-Air Law
Date: 2014-08-15

36

Which ICAO publication covers the procedures required for aircraft accident and incident reporting ?

☐ annex 18 to the convention of ICAO.

☐ Doc.8335

☒ Annex 13 to the convention of ICAO

37

When does Air Traffic Control Services have the responsibility to prevent collisions with terrain?

- ☐ ATS only provides prevention when an aircraft is flying IFR in IMC.
- ☒ When a flight in accordance with IFR is vectored by radar.
- ☐ ATS never prevent collisions with terrain.
- ☒ Always when ATS are provided.

38

"Secondary Surveillance Radar" (SSR) is not available. For radar identification ATC may request the pilot to execute one or more heading changes of

☐ 20° or more.

☐ 45°.

☐ 30° or more.

☒ 10°.

39

An integrated aeronautical information package consists of the following elements

- ☐ AIP, including amendment service; supplements to AIP, NOTAM, AIC and checklist summaries
- ☒ AIP including amendment service; supplements to AIP; NOTAM, AIC; AIRAC
- ☐ AIP, supplements to AIP; NOTAM and PIB; AIC and checklist summaries
- ☐ AIP, including amendment service; supplements to AIP; NOTAM and pre-flight information bulletin (PIB); AIC; checklists and summaries

40

Low intensity obstacle lights on vehicles other than those associated with emergency or security shall be

☐ Fixed red.

☐ Flashing blue.

☐ Fixed blue.

☒ Flashing yellow.


Attachment No. 1

Questions 26

figure 93

instrument_93.jpg

New Airspace Classification

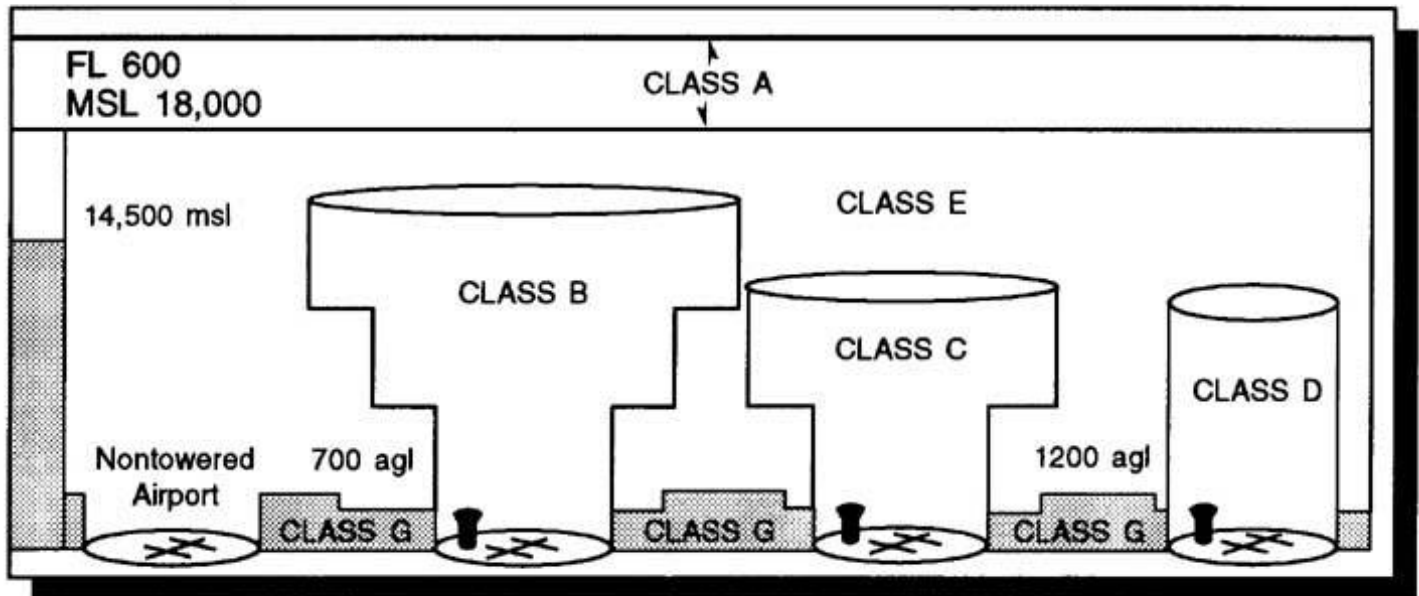

msl – mean sea level
agl – above ground level
FL – flight level

Figure 93. New Airspace Classification © ASA

Attachment No. 2

Questions 27

FIGURE 56

cfi_56.jpg

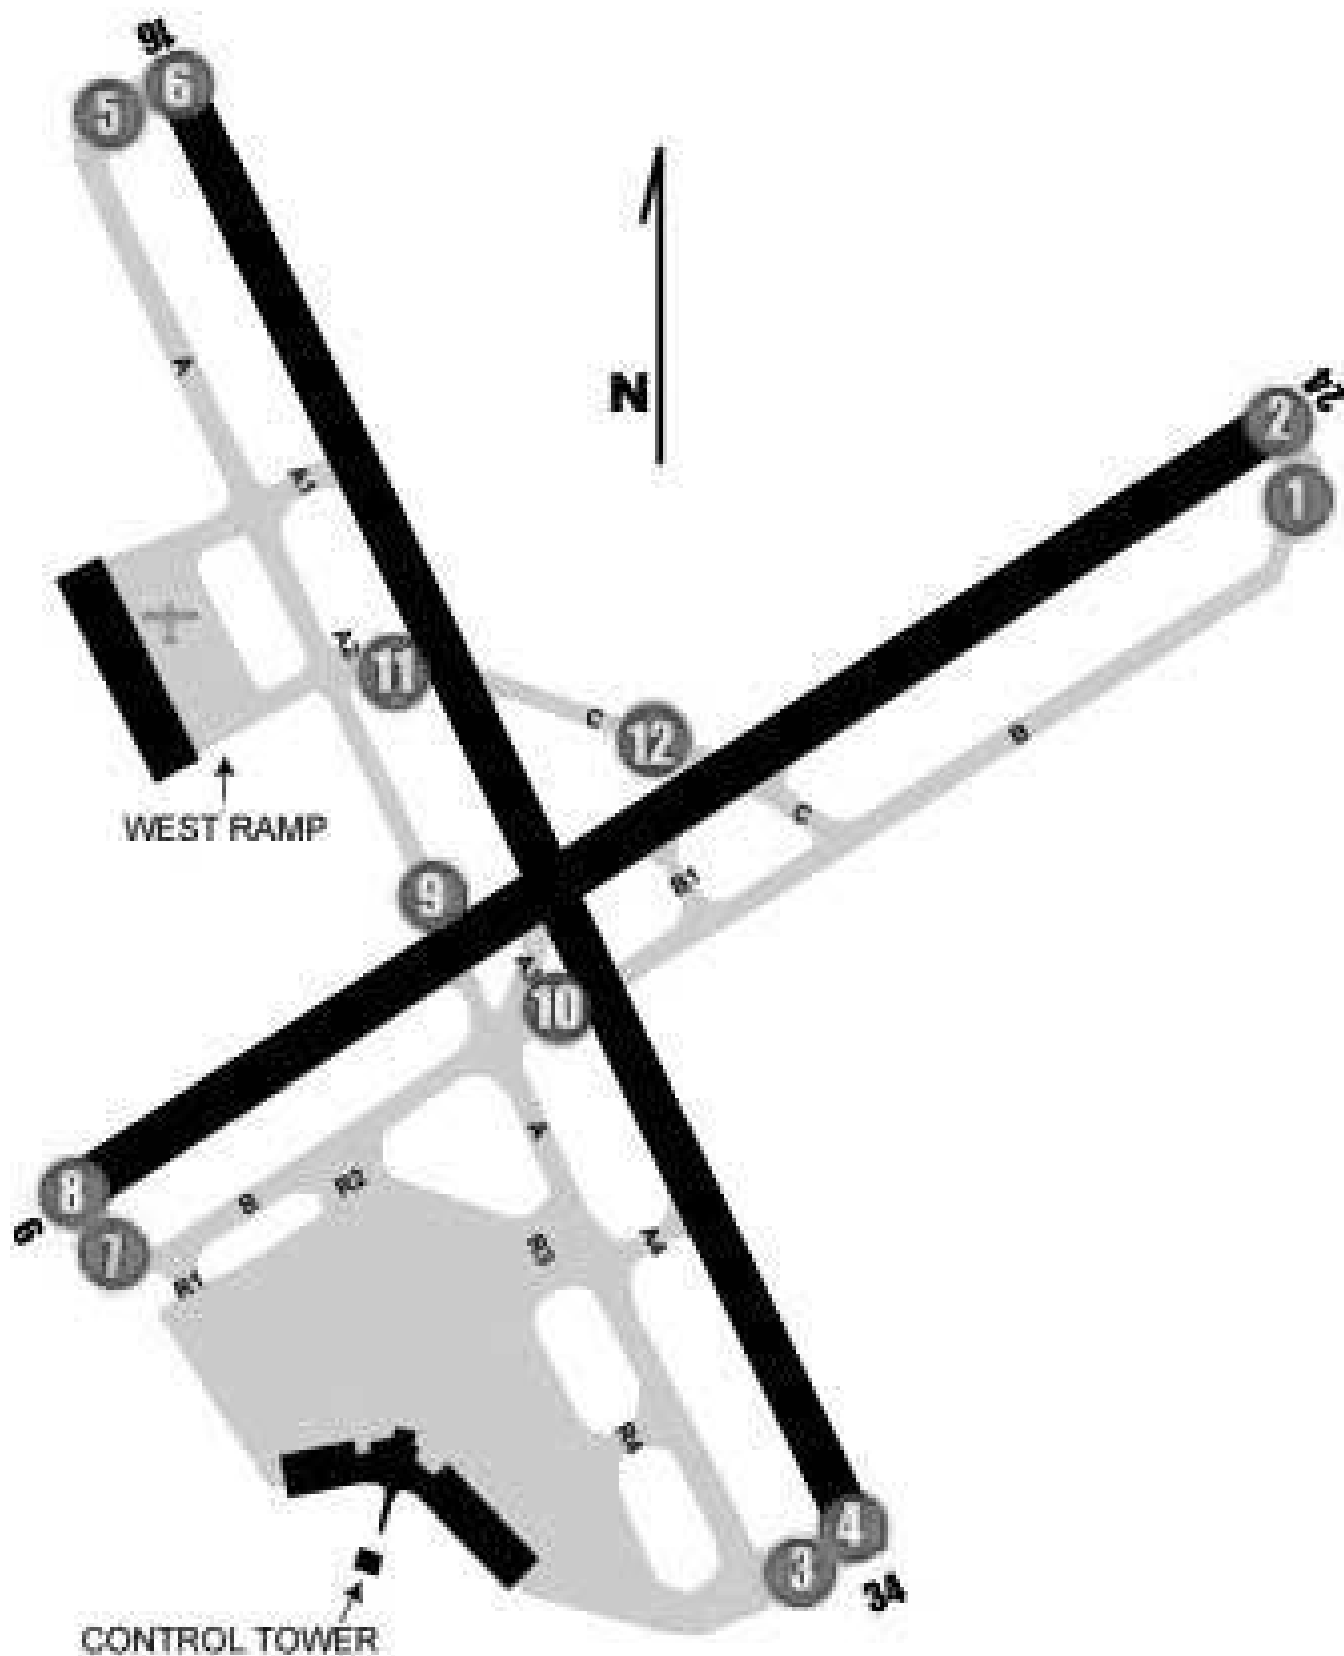


Figure 56. Runway Incursion © ASA