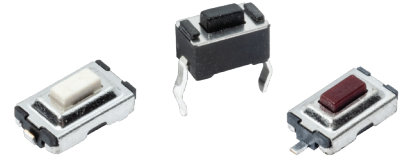


Features/Benefits

- 6,0 x 3,5 mm footprint
- Multiple heights
- THT or SMT type

Typical Applications

- IoT devices
- Home automation
- Remote controls

**Specification**

FUNCTION: Momentary action
CONTACT ARRANGEMENT: 1 make contact = SPST, N.O.
TERMINALS: THT, J, G and F type for SMT

Electrical

MAXIMUM VOLTAGE: 12 VDC
MAXIMUM CURRENT DC: 50 mA
DIELECTRIC STRENGTH: 250 VA C (1mn)
CONTACT RESISTANCE: $\leq 100 \text{ m } \Omega$
INSULATION RESISTANCE: $\geq 100 \text{ M } \Omega$
BOUNCE TIME: $\leq 10 \text{ ms}$

Environmental

OPERATING TEMPERATURE: -20°C to 70°C

Process

SOLDERING: This component is suited to the following methods:
– Infrared Reflow Soldering in accordance with IEC61760-1

Packaging

In bags of 1,000 pcs for THT
In reels of 3,000 pieces for 2.5 mm height
In reels of 1.500 pieces for 4.3 and 5.0 mm height
Dimensions of reels according to EIA 481B
External diameter 330 mm

NOTE: Specifications listed above are for switches with standard options.

For information on specific and custom switches, consult Customer Service Center.

Available part numbers and characteristics

Description	Height (mm)	Lead Shape	Ground Pin	Force	Travel (mm)	Operating Life	Actuator Color
PTS636 SL43 LFS	4.3	THT	No	130gf \pm 50gf	0.25 \pm 0.1	50,000	Black
PTS636 SM43 LFS	4.3	THT	No	180gf \pm 50gf	0.30 \pm 0.1	50,000	Black
PTS636 SK43 LFS	4.3	THT	No	250gf \pm 50gf	0.30 \pm 0.1	30,000	Black
PTS636 SP43 LFS	4.3	THT	No	320gf \pm 50gf	0.30 \pm 0.1	20,000	Black
PTS636 SL50 LFS	5.0	THT	No	130gf \pm 50gf	0.25 \pm 0.1	50,000	Black
PTS636 SM50 LFS	5.0	THT	No	180gf \pm 50gf	0.30 \pm 0.1	50,000	Black
PTS636 SK50 LFS	5.0	THT	No	250gf \pm 50gf	0.30 \pm 0.1	30,000	Black
PTS636 SP50 LFS	5.0	THT	No	320gf \pm 50gf	0.30 \pm 0.1	20,000	Black
PTS636 SL43 SMTR LFS	4.3	G	No	130gf \pm 50gf	0.25 \pm 0.1	50,000	Black
PTS636 SM43 SMTR LFS	4.3	G	No	180gf \pm 50gf	0.30 \pm 0.1	50,000	Black
PTS636 SK43 SMTR LFS	4.3	G	No	250gf \pm 50gf	0.30 \pm 0.1	30,000	Black
PTS636 SP43 SMTR LFS	4.3	G	No	320gf \pm 50gf	0.30 \pm 0.1	20,000	Black
PTS636 SL50 SMTR LFS	5.0	G	No	130gf \pm 50gf	0.25 \pm 0.1	50,000	Black
PTS636 SM50 SMTR LFS	5.0	G	No	180gf \pm 50gf	0.30 \pm 0.1	50,000	Black
PTS636 SK50 SMTR LFS	5.0	G	No	250gf \pm 50gf	0.30 \pm 0.1	30,000	Black
PTS636 SP50 SMTR LFS	5.0	G	No	320gf \pm 50gf	0.30 \pm 0.1	20,000	Black
PTS636 SM43J SMTR LFS	4.3	J	No	180gf \pm 50gf	0.25 \pm 0.1	50,000	Black
PTS636 SK43J SMTR LFS	4.3	J	No	250gf \pm 50gf	0.25 \pm 0.1	30,000	Red
PTS636 SM50J SMTR LFS	5.0	J	No	180gf \pm 50gf	0.25 \pm 0.1	50,000	Black
PTS636 SK50J SMTR LFS	5.0	J	No	250gf \pm 50gf	0.25 \pm 0.1	30,000	Red
PTS636 SM25 SMTR LFS	2.5	G	No	180gf \pm 30gf	0.25 \pm 0.1	70,000	White
PTS636 SK25 SMTR LFS	2.5	G	No	250gf \pm 50gf	0.25 \pm 0.1	100,000	Red
PTS636 SMG25 SMTR LFS	2.5	G	Yes	180gf \pm 30gf	0.25 \pm 0.1	70,000	White
PTS636 SKG25 SMTR LFS	2.5	G	Yes	250gf \pm 50gf	0.25 \pm 0.1	100,000	Red
PTS636 SM25J SMTR LFS	2.5	J	No	180gf \pm 30gf	0.25 \pm 0.1	70,000	White
PTS636 SK25J SMTR LFS	2.5	J	No	250gf \pm 50gf	0.25 \pm 0.1	100,000	Red
PTS636 SMG25J SMTR LFS	2.5	J	Yes	180gf \pm 30gf	0.25 \pm 0.1	70,000	White
PTS636 SKG25J SMTR LFS	2.5	J	Yes	250gf \pm 50gf	0.25 \pm 0.1	100,000	Red
PTS636 SM25F SMTR LFS	2.5	Flat	No	180gf \pm 30gf	0.25 \pm 0.1	70,000	White
PTS636 SK25F SMTR LFS	2.5	Flat	No	250gf \pm 50gf	0.25 \pm 0.1	100,000	Red





Dimensions are shown: mm

Specifications and dimensions subject to change





PTS636 Series 6,0 x 3,5 Top Actuated

NEW

THT versions (4,3 & 5,0 mm height)

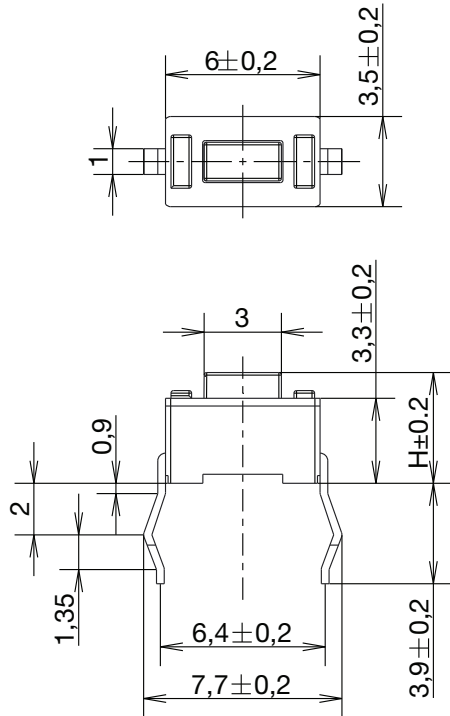

SMT G leads (4,3 & 5,0 mm height)

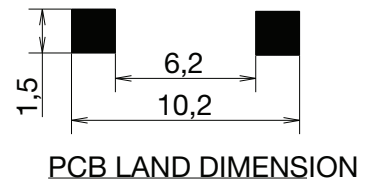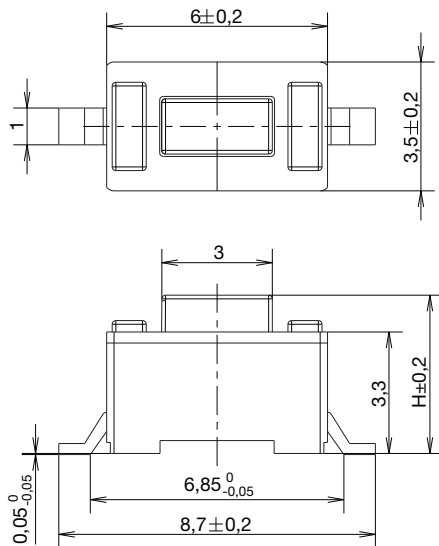






Dimensions are shown: mm
Specifications and dimensions subject to change



NEW

PTS636 Series 6,0 x 3,5 Top Actuated






SMT J leads (4,3 & 5,0 mm height)

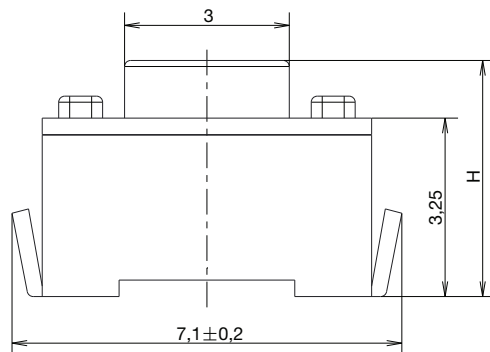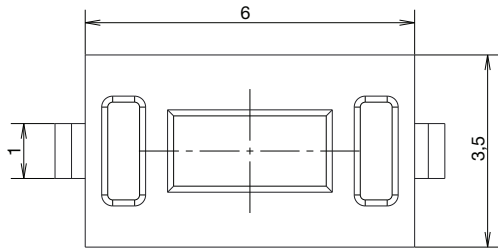

B

Tactile Switches




SMT G leads (2,5 mm height)

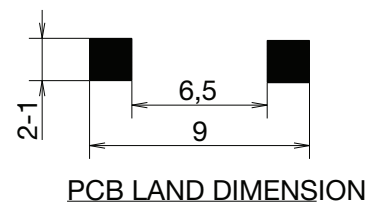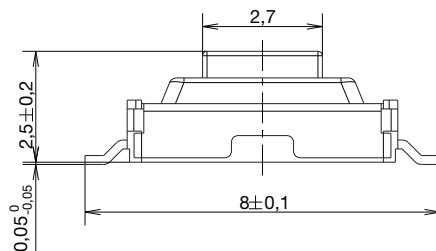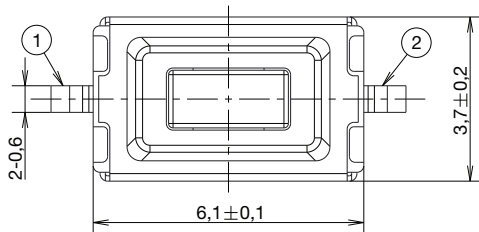




PTS636 Series 6,0 x 3,5 Top Actuated

NEW

SMT J leads (2,5 mm height)

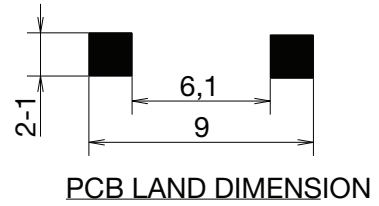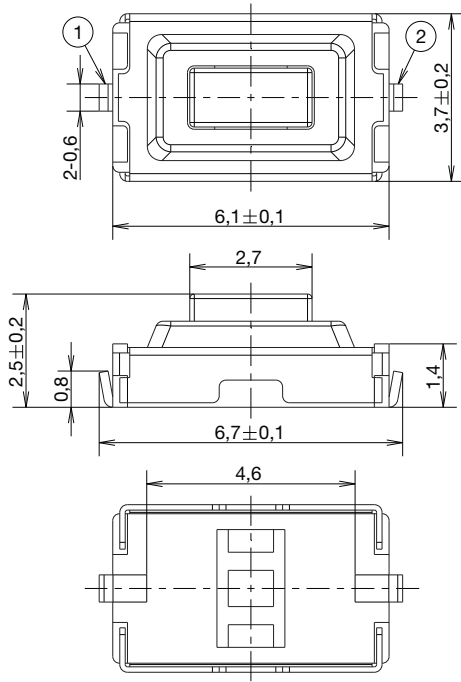

SMT F leads (2,5 mm height)


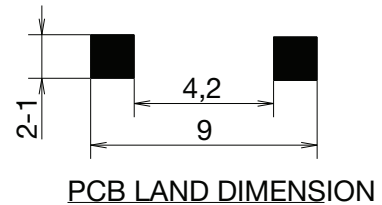
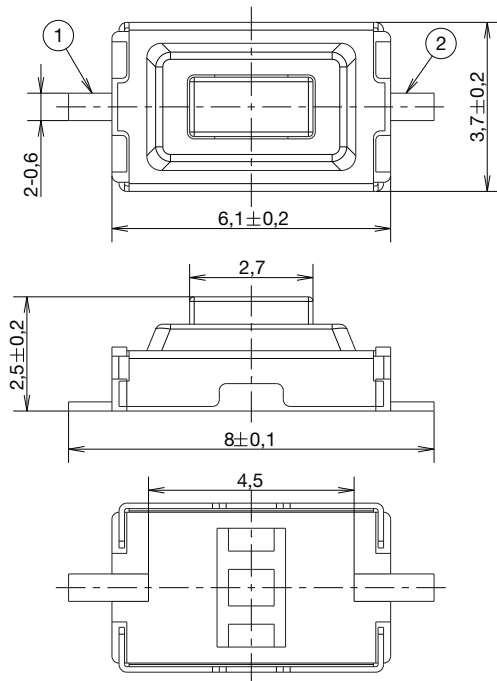


Dimensions are shown: mm
Specifications and dimensions subject to change




NEW

PTS636 Series 6,0 x 3,5 Top Actuated

SMT G leads, with ground pin (2,5 mm height)

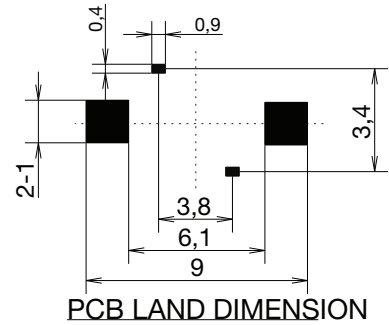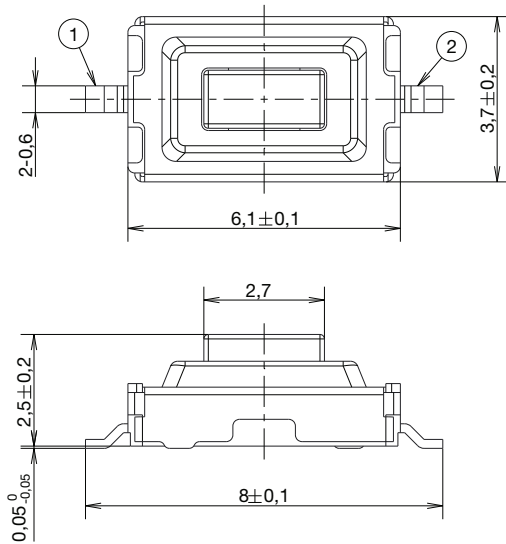

SMT J leads, with ground pin (2,5 mm height)

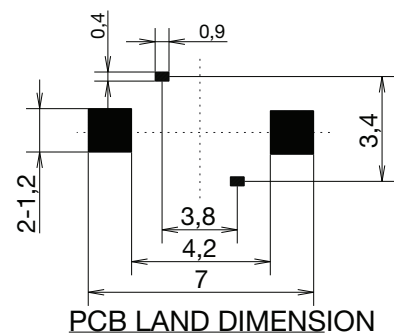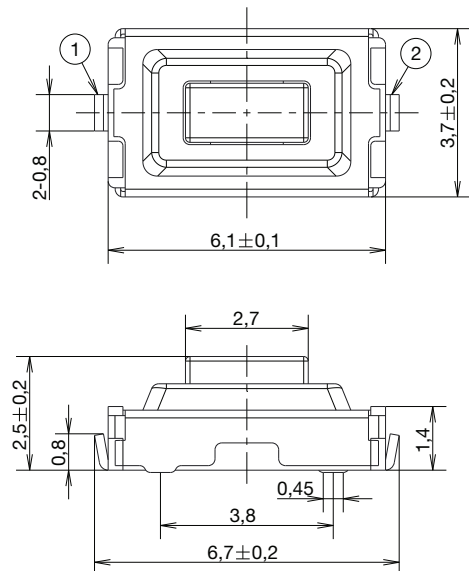


PTS636 Series 6,0 x 3,5 Top Actuated

NEW

PACKAGING


4,3 and 5,0 mm height - G leads

THE DIMENSION OF CARRIER TAPE AND REEL
Packaging quantity : 1500pcs/reel

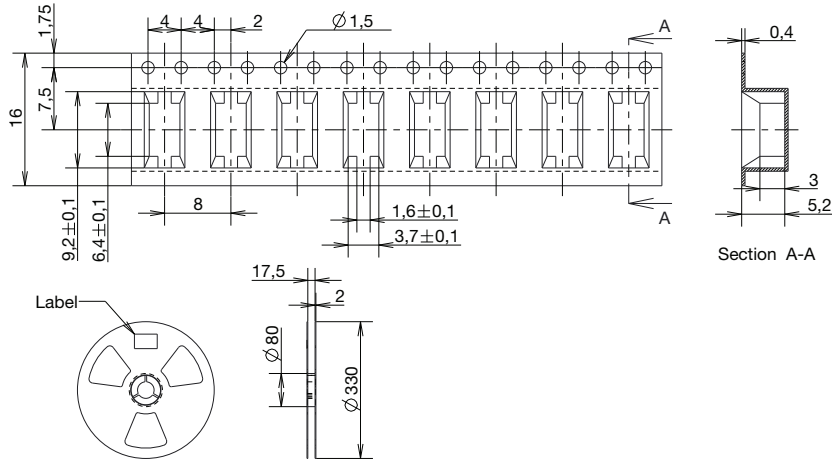


4,3 and 5,0 mm height - J leads

THE DIMENSION OF CARRIER TAPE AND REEL
Packaging quantity : 1500pcs/reel

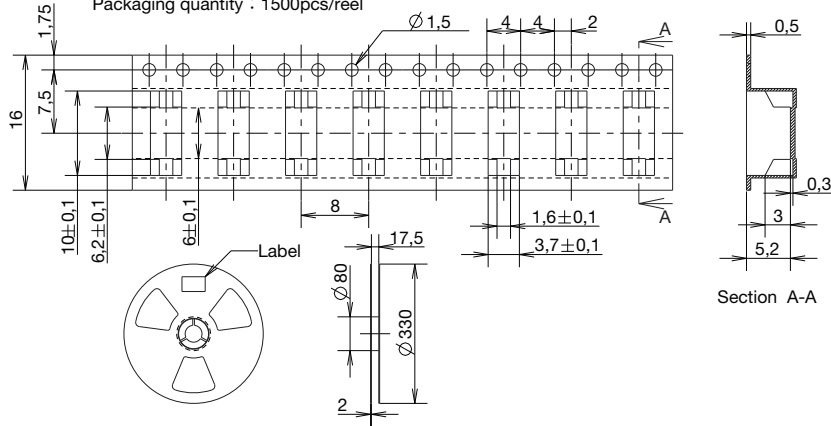

2,5 mm height

THE DIMENSION OF CARRIER TAPE AND REEL
Packaging quantity : 3000pcs/reel

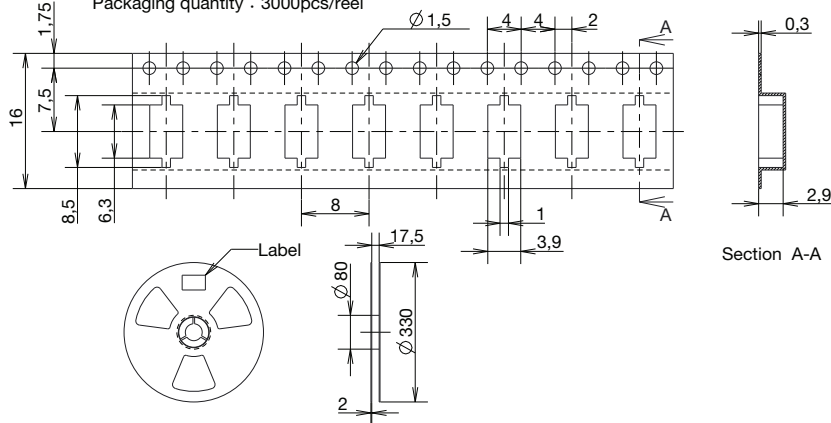

Dimensions are shown: mm
Specifications and dimensions subject to change

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Switches:

[PTS636 SK25 SMTR LFS](#) [PTS636 SK50 SMTR LFS](#) [PTS636 SP43 LFS](#) [PTS636 SK50 LFS](#) [PTS636 SM50J SMTR LFS](#) [PTS636 SKG25J SMTR LFS](#) [PTS636 SL43 LFS](#) [PTS636 SP50 LFS](#) [PTS636 SK43J SMTR LFS](#) [PTS636 SMG25 SMTR LFS](#) [PTS636 SM43 SMTR LFS](#) [PTS636 SM25 SMTR LFS](#) [PTS636 SM25J SMTR LFS](#) [PTS636 SM43 LFS](#) [PTS636 SK25J SMTR LFS](#) [PTS636 SM25F SMTR LFS](#) [PTS636 SP50 SMTR LFS](#) [PTS636 SL43 SMTR LFS](#) [PTS636 SL50 SMTR LFS](#) [PTS636 SM43J SMTR LFS](#) [PTS636 SM50 LFS](#) [PTS636 SL50 LFS](#) [PTS636 SMG25J SMTR LFS](#) [PTS636 SK25F SMTR LFS](#) [PTS636 SM50 SMTR LFS](#) [PTS636 SK50J SMTR LFS](#) [PTS636 SKG25 SMTR LFS](#) [PTS636 SP43 SMTR LFS](#) [PTS636 SK43 SMTR LFS](#) [PTS636 SK43 LFS](#)