



ROCKET SYSTEM & PROPELLING SYSTEM EXPLOSIVES



ROCKET SYSTEM & PROPELLING SYSTEM EXPLOSIVES

- FOLDING-FIN AERIAL ROCKET (FFAR)
- M72 LIGHT ANTI-TANK WEAPON SYSTEM (LAW)
- M72 ANTI-PERSONNEL WEAPON SYSTEM (AP)
- TRAINING SYSTEM
- ARTILLERY ROCKET (MLRS)
- ARTILLERY ROCKET
- (FOR VEHICLE)
- (FOR INFANTRY TROOPS)
- TRINITROTOLUEN
- HEXOGEN - OCTOGEN



2.75 INCH

FOLDING-FIN AERIAL ROCKET (FFAR)

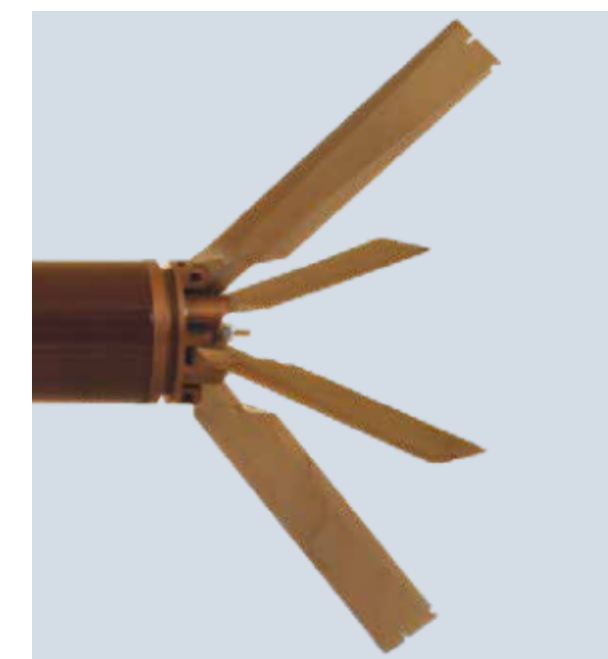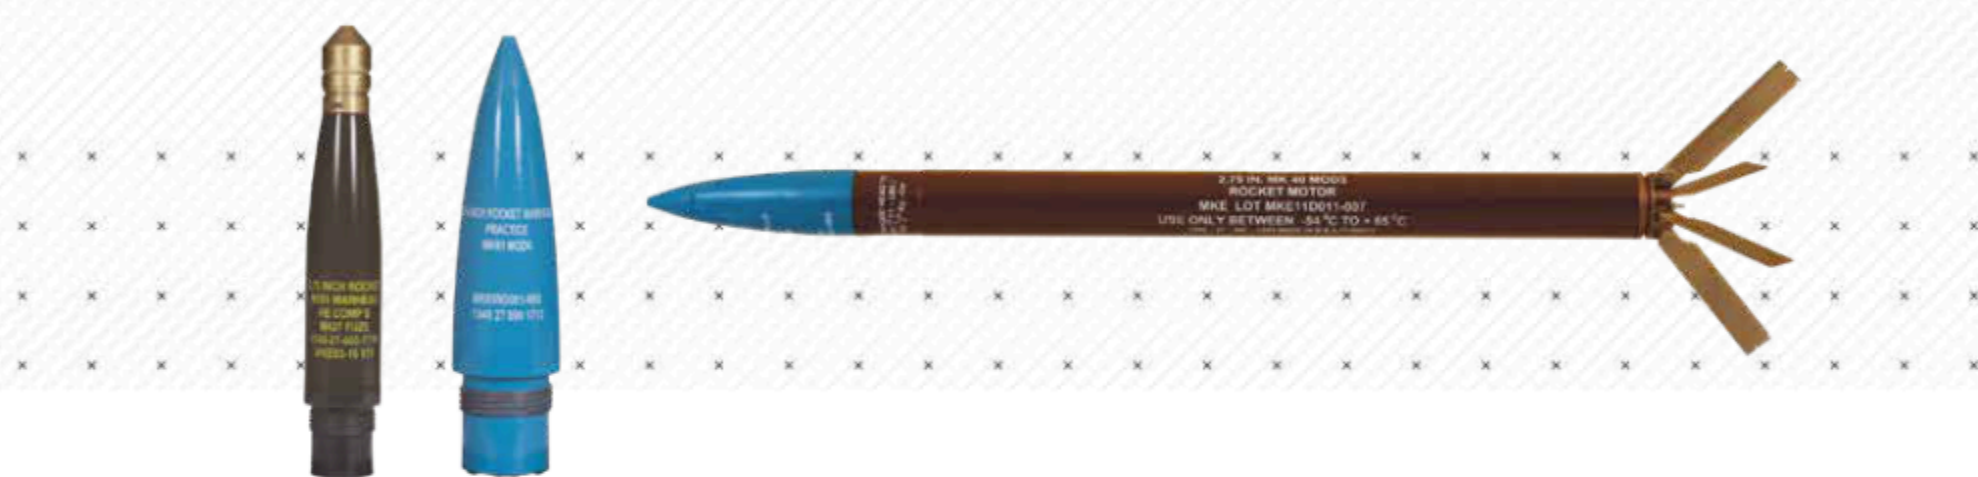

2,75" FOLDING-FIN AERIAL ROCKET (FFAR)	
Operation	Unguided, air to ground, ground to ground
Overall Length	1,4 m (with MK4 or MK40 Rocket Motor, M151 Warhead and M423 Fuze together)
Diameter	2,75" (70 mm)
Warhead Weight	(M151) 3,95 kg
Operation Temperature	-54°C to +65°
Range	7 km (Ground to ground max.)
Propellant Type	Double Base N5
Warhead Type	Various (HE M151, TP MK 61 MOD 0, Smoke/Signaling MKE MOD 248)
Complete System Weight	9,3 kg (MK40 or MK4 Rocket Motor, M151 Warhead and M423 Fuze together)
Burn-Out Velocity	0,73 km/s (Launched by high speed aircraft)
Burn-Out Velocity	0,64 km/s (Launched by helicopters)

66 MM

M72LIGHT
ANTI-TANKWEAPONSYSTEM (LAW)




66 MM M72 LIGHT ANTI-TANK WEAPON SYSTEM (LAW)	
Operation	Single shot disposable launcher
Diameter	66 mm
Overall Length	650 mm (Closed) 878 mm (Extended)
Complete System Weight	2,4 kg
Operation Temperature	-40°C to +60°C
Propellant Type	M7
Warhead Type	Anti-tank (shaped charge)
Effective Range	200 m
Fuze	M412A1
Penetration	300 mm



66 MM

M72ANTI-PERSONNEL
WEAPON SYSTEM (AP)

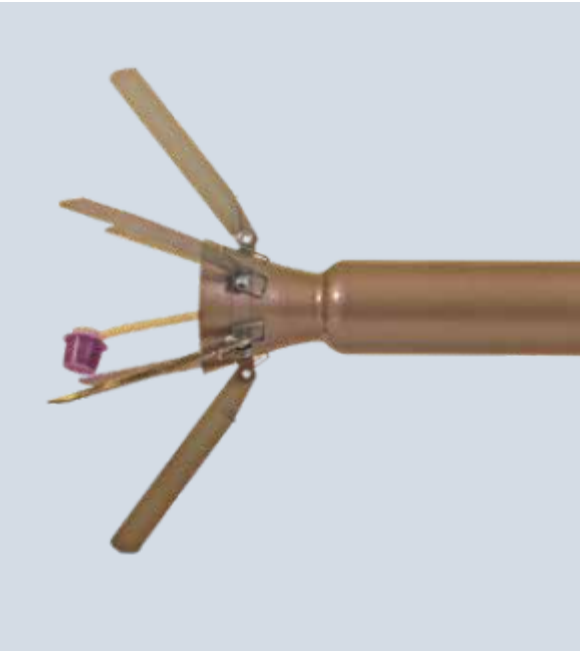

66 MM M72 ANTI-PERSONNEL WEAPON SYSTEM (AP)	
Operation	Single shot disposable launcher
Overall Length	650 mm (Closed) 878 mm (Extended)
Diameter	66 mm
Complete System Weight	2,4 kg
Operation Temperature	-40°C to +60°C
Propellant Type	M7
Warhead Type	Anti-personnel (with steel ball)
Effective Range	200 m

21 MM



21 MM TRAINING SYSTEM	
Operation	Training system of M72 LAW
Overall Length of System	650 mm (Closed) 878 mm (Extended)
Diameter	21 mm
Weight of Training Rocket	200 g
Propellant Type	M7
Fuze	No Fuze
Warhead Type	No warhead
Effective Range	200 m



107 MM

ARTILLERY ROCKET (MLRS)



107 MM ARTILLERY ROCKET (MLRS)		
Operation	Diameter	Ground to ground
Overall Length	Warhead	107 mm
Type	Propellant	840 mm
Type/Weight	Complete	HE
System Weight	Fuze Max.	Double Base/3,4 kg
Velocity Max.	Range CEP	19,3 kg
		PD (Point Detonating) Mechanical Fuze
		375 m/s
		8 km
		%2 (at max. range)

122 MM



122 MM ARTILLERY ROCKET (MLRS) (HE)	
Operation	Ground to ground
Rocket Weight	66 kg
Lengt h	2920 mm (with fuze)
Weight of Warhead	18 kg
Type of Warhead	HE
Fuze	MRV-U, Proximity
Propellant Type	Double Base
Weight of Propellant	20 kg
Max. Range	20 km
CEP	%1

122 MM ARTILLERY ROCKET (MLRS) (HE)	
Operation	Ground to ground
Rocket Weight	66 kg
Lengt h	2920 mm (with fuze)
Weight of Warhead	18 kg
Type of Warhead	With Steel Ball
Fuze	MRV-U, Proximity
Propellant Type	Double Base
Weight of Propellant	20 kg
Max. Range	20 km
CEP	%1





(FOR VEHICLE)

ALPAY

TAMKAR MINECLEARINGLINE CHARGE SYSTEM



TAMKAR MINE CLEARING LINE CHARGE SYSTEM (FOR VEHICLE)	
Dimensions of Cleaned Area	Length 100 m* Width 10 m* Depth 1 m*
Percent of Mine Destroyed	98% (Dimensions of cleaned area and percentage of mine destroyed may change according to terrain features.)
Types of Mine Cleaned	Effective against pressure and single impulse types (TM-45, TM-57, TMKR-2, ÖK-56 and similar mines)
Explosive Type	400 kg C-4, detonating fuse
Safety Distance	80 m away from border of minefield
Total Weight of System	3800 kg (Including trailer, launcher, line charge and rocket group)
Operation and Storage Temperature	-30°C to +52°C
Shelf Life	10 years
For Loading	2 persons



TAMKAR MINE CLEARING LINE CHARGE SYSTEM (FOR VEHICLE)

Length 100 m*

Dimensions of Cleaned Area

Width 10 m*

Depth 1 m*

*Dimensions of cleaned area and percentage of mine destroyed may change according to terrain features.

(FOR INFANTRY TROOPS)

TAMGEÇ

MINE CLEARING LINE CHARGE SYSTEM



TAMGEÇ MINE CLEARING LINE CHARGE SYSTEM (FOR INFANTRY TROOPS)

Dimensions of Cleaned Area Length 50±3 m*
Width 0,4±0,1 m*

*Dimensions of cleaned area and percentage of mine destroyed may change according to terrain features.

(FOR INFANTRY TROOPS)

TAMGEÇ

MINE CLEARING LINE CHARGE SYSTEM



TAMGEÇ MINE CLEARING LINE CHARGE SYSTEM (FOR INFANTRY TROOPS)

Dimensions of Cleaned Area	Length 50±3 m* Width 0,4±0,1 m*
Total Weight of System	73 kg max.
Percent of Mine Destroyed	98% (Dimensions of cleaned area and percentage of mine destroyed may change according to terrain features.)
Safety Distance	Minimum 30 m away from the border of minefield
Operation and Storage Temperature	-40°C to +50°C
Explosive Type	22 kg C-4, detonating fuse
Types of Mine Cleaned	Effective against pressure and single impulse types (TM-45, TM-57, TMKR-2, ÖK-56 and similar mines)
Shelf Life	5 years (For battery) → Under appropriate storage conditions 10 years (For explosive) – Batteries must be controlled periodically once a year.
Personnel Needed For Operation	For Transport 2 persons For Operation 1 person

TRINITROTOLUEN
TNT TYPE I



TRINITROTOLUEN
TNT TYPE III



HEXOGEN
RDX



OCTOGEN
HMX



TNT TYPE I

Appearance	From light to dark yellow in color, flake
Water Content	% 0.1 max.
Acidity (H ₂ SO ₄)	% 0.02 max.
Alkalinity	No
Insoluble Matter	% 0.05 max.
Sodium (Na) Compounds	% 0.001 max.
Flake Size	Average thickness less than 0.63 mm, individual thickness less than 1.02 mm
Solidification Point	80.20 °C min.

TNT TYPE III

Appearance	From light to dark yellow in color, flake
Water Content	% 0.1 max.
Acidity (H ₂ SO ₄)	% 0.02 max.
Alkalinity	No
Insoluble Matter	% 0.05 max.
Sodium (Na) Compounds	% 0.001 max.
Flake Size	Average thickness less than 0.63 mm, individual thickness less than 1.02 mm
Solidification Point	80.20 °C min.

RDX (HEXOGEN)

TYPE I

TYPE II

Color and Appearance	White crystal	White crystal
Melting Point (°C, min.)	200	200
Acetone Insoluble Matter (% m/m, max.)	0.05	0.05
Ash Content (% m/m, max.)	0.03	0.03
Acidity (% m/m, max.)	0.05	0.02 - 4.0
HMX Content (% m/m)	0.0 - 5.0	- 17.0
Inorganic Insoluble (% m/m)	0.03	0.03
Impact Sensitivity (cm, min.) – Holston impact method	33	33
Impact Sensitivity (cm, min.) – ERL, Type 12, 2.5 kg	15	15
Granulation	Large range	Large range

HMX (OCTOGEN)

Color and Appearance HMX Content

White crystal

(% m/m) RDX Content (% m/m)	min. 98
Acetone Insoluble Matter (% m/m, max.)	max. 2
Melting Point (°C, min.)	max. 0.05
Ash Content (% m/m, max.)	min. 277
Acidity (% m/m, max.)	max. 0.03
Inorganic Insoluble (% m/m)	max. 0.02
Impact Sensitivity (cm, min.) – Holston method	max. 0.03
Impact Sensitivity (cm, min.) – ERL, Type 12, 2.5 kg	min. 26
Granulation	min. 17
	Large range

ABOUT



ASLON Defence Industry is a dynamic and forward-looking company specializing in the supply and integration of advanced defence and ammunition solutions for military, law enforcement, and private security sectors worldwide.

With a strong commitment to quality, reliability, and operational excellence, ASLON delivers a comprehensive range of ammunition systems, including medium and heavy calibers, grenade systems, mortar ammunition, tank ammunition, and various tactical solutions tailored to modern battlefield requirements.

Leveraging strategic partnerships with leading manufacturers and combining deep industry expertise, ASLON ensures that all products meet international standards and perform under the most demanding combat conditions.

Our mission is to provide high-performance, cost-effective, and mission-ready solutions while building long-term partnerships based on trust, professionalism, and confidentiality.

ASLON Defence Industry operates from Konya, Türkiye, serving global clients with fast response, flexible logistics, and dedicated customer support.



ASLON DEFENCE INDUSTRY
info@aslon.com samet@aslon.com
+90 332 342 77 77 31
WhatsApp: +90 552 871 28 04