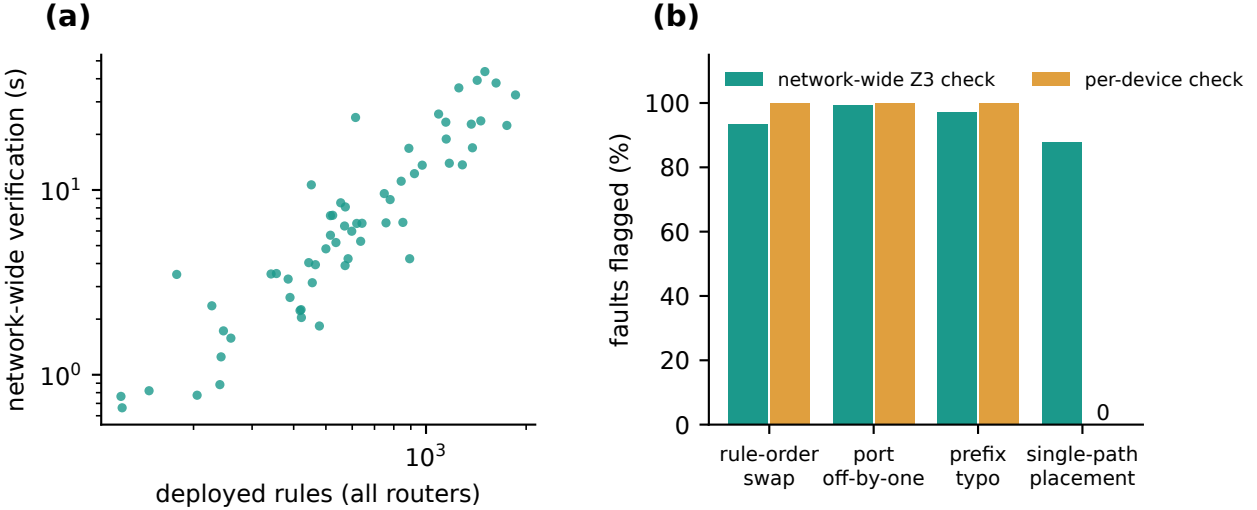

(a)
network-wide verification (s)
10^1
10^0
10^3
deployed rules (all routers)
(b)
network-wide Z3 check
per-device check
faults flagged (%)
100
80
60
40
20
0
0
rule-order swap
port off-by-one
prefix typo
single-path placement