# 3<sup>rd</sup> Project Report: Liquid-Liquid Equilibrium of Alkane/Sulfolane Binary Mixture by NRTL

Kim, Seonggyun / 2017032597

Jeong, Jonghyeon / 2017033118

Department of Chemical Engineering, Hanyang University

CHE 3006: Chemical Engineering Thermodynamics 2

Bae, Young Chan

November 18, 2021

#### **Abstract**

In this report, review of liquid-liquid equilibrium(LLE) is presented with local-composition models (Wilson equation, NRTL, and UNIQUAC/UNIFAC) and phase stability criterion for LLE is introduced. Experimental data of LLE for two binary systems containing sulfolane and one of alkanes(pentane and hexane) over the temperature range of 300 K to the upper critical solution temperature(UCST) were correlated using NRTL(non-random-two-liquid) model. The NRTL parameters were curve-fitted from experimental data and a new  $\tan(\tau)$  function with an added linear term is introduced to show improved accuracy compared to the function implemented by Aspen Institute. For NRTL calculation and parameter optimization, the same 'isoactivity' objective function was set to be minimized by simple search method.

## **Table of Contents**

A	bstract		1						
1	Intr	oduction	3						
2	The	Theory							
	2.1	LLE (Liquid-Liquid Equilibrium)							
	2.2	Local-Composition Models	5						
	2.2.1	Wilson Equation	5						
	2.2.2	NRTL(Non-Random-Two-Liquid) model	6						
	2.2.3	UNIQUAC/UNIFAC Method	7						
	2.3	Requirement for LLE: Phase Stability	8						
	2.4	NRTL: Parameter Estimation from LLE Data	9						
	2.5	NRTL: Tie-line Calculation Steps	10						
3	Res	ults and Discussion	11						
	3.1	Optimized NRTL Parameters	11						
	3.2	LLE Diagrams by NRTL	13						
	3.2.1	Pentane(1)/Sulfolane(2) Binary Mixture	13						
	3.2.2	Hexane(1)/Sulfolane(2) Binary Mixture	15						
	3.3	Limitations	16						
4	Con	nclusion	17						
5	Ref	erences	18						
6	App	oendix	19						
	Appen	dix A. Calculation of Activity Coefficient from Local-Composition Models	19						
		Wilson Equation							
	A.2 I	NRTL	21						
	Appen	dix B. MATLAB® Codes with Execution Results	23						
	B.1 0	Gibbs Energy Diagram ('Gx_plot.m')	23						
	B.2 l	NRTL Parameter Optimization ('find_tau.m')	25						
	B.3 1	NRTL LLE Calculation ('LLE_NRTL.m')	28						

#### 1 Introduction

The separation process is essential to obtain a necessary product with a high concentration in industrial process with mixture. The process of extraction and production of aromatic hydrocarbons by reforming naphtha produced in naphtha reforming process is called the BTX(benzene-toluene-xylene) process[1], [2]. BTX can be obtained through sulfolane, BTU, PAREX, and ISOMAR processes. Figure A is a typical diagram of this process provided by Sweeney and Bryan [2, p. 10].

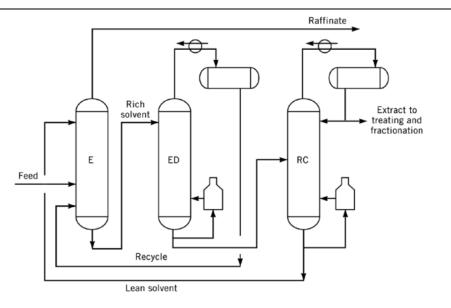


Figure A. Shell sulfolane extraction process. E, extraction; ED, extractive distillation; RC, recovery column. Courtesy of UOP, Inc.

The manufactured toluene is usually converted into benzene, which is commonly used as a raw material for styrene monomer(SM), nylon and cumene. The polyester film can be produced with para-xylene(PX) [3]. This project aims to study liquid-liquid equilibria(LLE) of alkanes contained in the raw material and the solvent in the sulfolane process. Various solvents including sulfolane, glycol and NFM(N-formylmorpholine) may be used in the sulfolane process [4], [5].

Before running the process, it is important to theoretically optimize the chemical process to determine the amount of solvent and raw material for appropriate scale of facilities and operating cost. In order to predict the behavior of each component in the solution, it is necessary to know the physical properties of the mixture in a LLE. Especially, an actual solution shows different behavior from ideal solution due to intermolecular interactions and non-randomness. Therefore, to make more precise and accurate calculation, it is necessary to understand thermodynamic properties of an actual solution and use appropriate formulas. Thermodynamic models for computing the properties of real solution include Wilson Equation, NRTL model, UNIQUAC and UNIFAC. As mentioned above,

these models take into account the interaction and non-randomness between compositions. Each model simulates actual solution by introducing different set of parameters.

## 2 Theory

#### 2.1 LLE (Liquid-Liquid Equilibrium)

An unexpected presence of two liquid phases can be a critical problem in distillation and pumping. Hence one must make sure by experiment or calculation, whether the solution is in single liquid phase or two or more liquid phases are present in the solution. Despite such practical importance in simulation of process, LLE has not received nearly as much attention as VLE(vapor-liquid equilibrium). There are several reasons for this [6]:

- 1) The experimental determination of LLE compositions can often be carried out on an ad hoc basis which reduces the incentive for correlation.
- 2) The correlation of LLE da can be, from numerical point of view, much more difficult than the correlation of VLE.
- 3) Temperature effects are more pronounced for LLE than for VLE.
- 4) Economically, distillation plays a bigger role in industry than does extraction.

Nevertheless, many references, especially experimental work, exist for LLE.

Like VLE, LLE satisfies the following condition with phase  $\alpha$  and  $\beta$  at constant temperature. In this project, the effect of pressure on the behavior of LLE is negligible.

$$\hat{f}_i^{\alpha} = \hat{f}_i^{\beta}$$
  $(i(\text{species}) = 1, 2, ..., N)$ 

According to the definition of activity coefficient,  $\gamma_i = \hat{f}_i^{\alpha}/x_i f_i$ , the fugacity in each phase can be expressed as below.

$$x_i^{\alpha} \gamma_i^{\alpha} f_i^{\alpha} = x_i^{\beta} \gamma_i^{\beta} f_i^{\beta}$$

The fugacity of pure species i is  $f_i^{\alpha} = f_i^{\beta} = f_i$  at constant temperature and pressure. So, under LLE conditions, the equation below is satisfied.

$$x_i^{\alpha} \gamma_i^{\alpha} = x_i^{\beta} \gamma_i^{\beta}$$

The activity coefficient depends on the composition, temperature and pressure. Therefore, for the binary solution, the activity coefficient can be measured with  $x_1$ , T, and P through the relation  $(x_1 + x_2 = 1)[7, pp. 590–591]$ .

## 2.2 Local-Composition Models

Theoretical developments for describing the molecular thermodynamics of liquid-solution behavior are often based on the concept of *local composition*. The ideal solution is a totally random mixture of constituent particles, so the concentration of the total solution and a certain portion of the solution are the same. However, in actual solution, the constituent particles are not evenly mixed like ideal solution, and local concentration of solution is different to entire concentration. Hence it is important to understand the concept of *local composition* in order to simulate the behavior of actual solutions[7, pp. 471–472]. To measure the properties of actual solutions in consideration of this concept, Wilson equation, NRTL equation, UNIQUAC(Universal Quasi Chemical), and UNIFAC(UNIQUAC Functional group Activity) can be used.

#### 2.2.1 Wilson Equation

Wilson equation proposed by G. M. Wilson in 1964 can calculate the behavior of the solution through  $\Lambda_{12}$  and  $\Lambda_{21}$ .

$$\frac{G^E}{RT} = -\sum_{i} \left[ x_i \ln \left( \sum_{j} x_i \Lambda_{ij} \right) \right]$$

$$= -[x_1 \ln(x_1 \Lambda_{11} + x_2 \Lambda_{12}) x_2 \ln(x_1 \Lambda_{21} + x_2 \Lambda_{22})] \quad \text{(for a binary system)}$$

$$\therefore \frac{G^E}{RT} = -[x_1 \ln(x_1 + x_2 \Lambda_{12}) + x_2 \ln(x_2 + x_1 \Lambda_{21})] \quad (\because \Lambda_{11} = \Lambda_{22} = 1)$$

**Equation 1. Wilson equation** 

By applying the relation between activity coefficient and excess Gibbs energy, activity coefficients are represented as following equations (detailed calculation procedure for Wilson equation is in **Appendix A.1**):

$$\ln \gamma_1 = -\left[\ln(x_1 + x_2\Lambda_{12}) + x_2\left(\frac{\Lambda_{21}}{x_2 + x_1\Lambda_{21}} - \frac{\Lambda_{12}}{x_1 + x_2\Lambda_{12}}\right)\right]$$

$$\ln \gamma_2 = -\left[\ln(x_2 + x_1 \Lambda_{21}) + x_1 \left(\frac{\Lambda_{12}}{x_1 + x_2 \Lambda_{12}} - \frac{\Lambda_{21}}{x_2 + x_1 \Lambda_{21}}\right)\right]$$

For infinite dilution  $(x_1 \to 0 \text{ or } x_2 \to 0)$ , these equations become:

$$\lim_{\substack{\chi_1 \to 0 \\ (\chi_2 \to 1)}} \ln \gamma_1 = \ln \gamma_1^{\infty} = -\ln \Lambda_{12} + 1 - \Lambda_{21}$$

$$\lim_{\substack{x_2 \to 0 \\ (x_1 \to 1)}} \ln \gamma_1 = \ln \gamma_2^{\infty} = -\ln \Lambda_{21} + 1 - \Lambda_{12}$$

A serious disadvantage of Wilson's equation lies in its inability to predict limited miscibility. When Wilson equation is substituted into the equations of thermodynamic stability for a binary system, no parameters  $\Lambda_{12}$  and  $\Lambda_{21}$  can be found that indicates the existence of two stable liquid phase. So, Wilson equation should be used only for liquid systems that are completely miscible or else for those limited regions of partially miscible solutions that only one liquid phase is present. Therefore, in this project, Wilson's equation not been adopted as actual liquid-liquid solution model [8, pp. 164–165].

## 2.2.2 NRTL(Non-Random-Two-Liquid) Model

NRTL model reflects the characteristics of the local composition of the actual solution.

$$\frac{G^E}{x_1 x_2 RT} = \frac{G_{21} \tau_{21}}{x_1 + x_2 G_{21}} + \frac{G_{12} \tau_{12}}{x_2 + x_1 G_{12}}$$

**Equation 2. NRTL Equation** 

Here,

$$G_{12}=\exp(-lpha au_{12})$$
 ,  $G_{21}=\exp(-lpha au_{21})$  
$$au_{ij}=a_{ij}+rac{b_{ij}}{T}+c_{ij}lnT$$

By applying the relation between activity coefficient and excess Gibbs energy, activity coefficients are represented as following equations (detailed calculation procedure for Wilson equation is in **Appendix A.2**):

$$\ln \gamma_1 = x_2^2 \left[ \tau_{21} \left( \frac{G_{21}}{x_1 + x_2 G_{21}} \right)^2 + \frac{G_{12} \tau_{12}}{x_2 + x_1 G_{12}} \right]$$

$$\ln \gamma_2 = x_1^2 \left[ \tau_{12} \left( \frac{G_{12}}{x_2 + x_1 G_{12}} \right)^2 + \frac{G_{21} \tau_{21}}{x_1 + x_2 G_{21}} \right]$$

The infinite-dilution  $(x_1 \to 0 \ or \ x_2 \to 0)$  values of the activity coefficients are given by equations:

$$\lim_{x_1 \to 0(x_2 \to 1)} \ln \gamma_1 = \ln \gamma_1^{\infty} = \tau_{21} + \tau_{12} G_{12} = \tau_{21} + \tau_{12} \exp(-\alpha \tau_{12})$$

$$\lim_{x_2 \to 0(x_1 \to 1)} \ln \gamma_2 = \ln \gamma_2^{\infty} = \tau_{12} + \tau_{21} G_{21} = \tau_{12} + \tau_{21} \exp(-\alpha \tau_{21})$$

## 2.2.3 UNIQUAC/UNIFAC Method

The UNIQUAC equation calculates  $g \equiv \frac{G^E}{RT}$  as the sum of the two terms.  $g^C$  is a combinatorial term, which is related to the different shape and size of molecules in the mixture.  $g^R$  is a residual term, which is different from residual Gibbs free energy defined as the difference between real and ideal Gibbs free energy, and it explains intermolecular interaction. For a multicomponent system,

$$g^{C} = \sum_{i} x_{i} \ln \frac{\Phi_{i}}{x_{i}} + 5 \sum_{i} q_{i} x_{i} \ln \frac{\theta_{i}}{\Phi_{i}}$$

$$g^R = -\sum_i q_i x_i \ln \left( \sum_j \theta_j \tau_{ji} \right)$$

$$\Phi_i = \frac{x_i r_i}{\sum_j x_j r_j}, \qquad \theta_i = \frac{x_i q_i}{\sum_j x_j q_j}, \qquad \tau_{ji} = \exp\left[\frac{-\left(u_{ji} - u_{ii}\right)}{RT}\right] \qquad (\tau_{ii} = \tau_{jj} = 1)$$

**Equation 3. UNIQUAC equation** 

Function  $g^C$  contains pure-species parameters only, whereas function  $g^R$  incorporates two binary parameters for each pair of molecules. In addition,  $r_i$ ,  $q_i$  and  $u_{ij}$  reflect the relative molecular volume, relative molecular surface area and influence of temperature, respectively.

Unlike UNIQUAC, which describes the effects of molecules constituting a mixture in solutions, UNIFAC represents the non-randomness and interaction of solutions in consideration of a specific structural units. These structural units are called *subgroups*. The great advantage of the UNIFAC method is that a relatively small number of subgroups combine to form a very large number of molecules[7, pp. 749–751]. However, UNIQUAC and UNIFAC are not used in this project, since NRTL already gives sufficiently accurate predictions with properly optimized parameters with much less complexity.

#### 2.3 Requirement for LLE: Phase Stability

Criterion of stability for a single-phase binary system is given as[7, p. 438]:

At fixed temperature and pressure, a single-phase binary mixture is stable if and only if  $\Delta G$  and its first and second derivatives are continuous functions of  $x_1$ , and the second derivative is positive.

In other words, in order for a two-phase equilibrium of a binary system to be stable, it is required that the second derivative is negative, as well as  $\Delta G$  and its first and second derivatives are continuous functions of  $x_1$ .

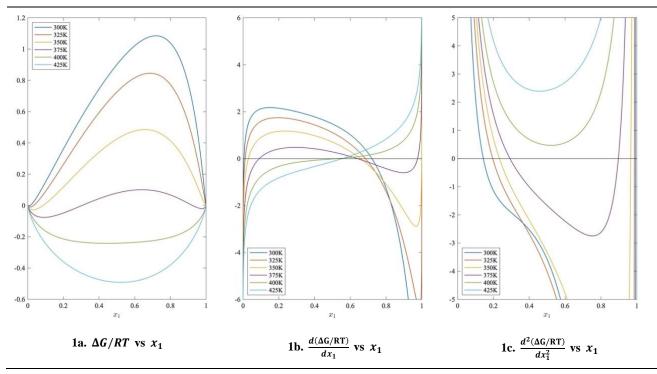


Figure 1. Phase stability profiles at constant T for pentane(1)/sulfolane(2) mixture, by NRTL model

For example, **Figure 1** shows  $\Delta G/RT$  and its first and second derivative with respect to  $x_1$  for pentane(1)/sulfolane(2) binary mixture. From the **Figure 1c**, one can interpret approximate temperature range for LLE: isotherms of 300K, 325K, 350K, and 375K have negative value while isotherms of 400K and 425K always have positive values. This implies the LLE is observed for the system at up to certain temperature between 375K and 400K (which is later found to be 390K; see **4.2**).

#### 2.4 NRTL: Parameter Estimation from LLE Data

Parameter estimation for NRTL is essentially about finding a set of optimum  $\tau$  values from experimental data, since  $\alpha$  is conventionally fixed as 0.2, 0.3, etc. depending on the characteristics of the system [9]. Then a proper model function of T can be curve-fitted to the optimum  $\tau$  values to obtain coefficients in the model function.

#### **Step 1: Set an objective function**

Optimum parameters can be found by numerically solving an objective function defined to satisfy equilibrium conditin. Relative isoactivity objective function was used in this project:

$$OF(\tau_{12}, \tau_{21}) = \sum_{i} \left( \ln(x_i^{\alpha} \gamma_i^{\alpha}) - \ln(x_i^{\beta} \gamma_i^{\beta}) \right)^2$$
$$= \left( \ln(x_1^{\alpha} \gamma_1^{\alpha}) - \ln(x_1^{\beta} \gamma_1^{\beta}) \right)^2 + \left( \ln(x_2^{\alpha} \gamma_2^{\alpha}) - \ln(x_2^{\beta} \gamma_2^{\beta}) \right)^2$$

## Step 2: Find optimum $\tau_{12}$ and $\tau_{21}$

Here, direct search method was used to scan each of  $\tau_{12}$  and  $\tau_{21}$  around initially assumed values. Search step must be set low enough to obtain good results, however, too small step size results in slow computing performance.

#### Step 3: Develop a model function to curve-fit

Once optimum  $\tau$  values are found, a model function can be developed by inspecting the curve shape or found from literature. In this work, to take account for 1) inverse proportionality, 2) logarithmic component, and 3) linear trend, following model function was developed to be fitted:

$$\tau_{12} = a_{12} + \frac{b_{12}}{T} + c_{12} \ln T + d_{12}T$$

$$\tau_{21} = a_{21} + \frac{b_{21}}{T} + c_{21} \ln T + d_{21}T$$

#### Step 4: Curve-fit model function to optimum $\tau_{12}$ and $\tau_{21}$

Curve fitting the model function to optimum parameters can be done by computer software packages, such as lsqcurvefit function by MATLAB® 'curve fitting' Toolbox.

#### Step 5: Plot LLE diagram with curve-fitted parameters and compare with experimental data

Finally, calculating deviation of NRTL model with fitted parameters from the experimental data is proceeded to examine the accuracy and precision of the model.

#### 2.5 NRTL: Tie-line Calculation Steps

It has been reported by Sørensen et al.[9] that NRTL calculation can be carried out by finding  $x_1^{\alpha}$  and  $x_1^{\beta}$  at the points where  $d(\Delta G)/dx_1 = 0$ . However, depending on the profile of  $\Delta G - x_1$  curve, this method can result in yielding false solution which then necessitates further maneuver. Therefore, in this work, Tie-line calculation was done by searching optima of both  $x_1^{\alpha}$  and  $x_1^{\beta}$  from 0 and 1 respectively (or from the values obtained from the previous T) until minimum of an objective function is found. In this work, the search step size is set to be 0.0001 in correspondence to the significant figures of experimental data reported by Ko et al.[10].

## Step 1: Set T

Generally, activity coefficient is a function of pressure, temperature, and composition. However, in LLE system, it is a very weak function of pressure since when incompressible-liquid assumption is made. Therefore, in a binary LLE system, the composition of each species in both phases can be determined once T is fixed.

# Step 2: Assume $x_1^{\alpha}$ and $x_1^{\beta}$

It is possible to obtain analytical solution when activity coefficient is represented by simple models. However, it is more viable to numerically solve the set of equations when the model is complicated as in the case of NRTL model used in this work.

By assuming  $x_1^{\alpha}$  and  $x_1^{\beta}$ , a complete description for the composition of the binary system is obtained since  $x_2^{\pi} = 1 - x_1^{\pi}$  ( $\pi = \alpha, \beta$ ). However, it is not the correct description unless LLE criteria are also satisfied:

$$x_i^{\alpha} \gamma_i^{\alpha} = x_i^{\beta} \gamma_i^{\beta} \ (i = 1, 2)$$

#### **Step 3: Set an objective function**

To find the composition that satisfy the criteria, an object function is defined as to imply LLE criterion for each species in the equilibrium.

$$OF(x_1^{\alpha}, x_1^{\beta}) = \sum_{i} \left( \ln(x_1^{\alpha} \gamma_1^{\alpha}) - \ln(x_i^{\beta} \gamma_i^{\beta}) \right)^2$$
$$= \left( \ln(x_1^{\alpha} \gamma_1^{\alpha}) - \ln(x_1^{\beta} \gamma_1^{\beta}) \right)^2 + \left( \ln(x_2^{\alpha} \gamma_2^{\alpha}) - \ln(x_2^{\beta} \gamma_2^{\beta}) \right)^2$$

To increase the rate of convergence, the composition information obtained for the previous T can be used as the initial guess.

# Step 3: Evaluate objective function with varying $x_1^{\alpha}$ and $x_1^{\beta}$ until optimum is found

The objective function is first calculated with varying initially assumed values of  $x_1^{\alpha}$  and  $x_1^{\beta}$  until an optimum is found.  $x_1^{\alpha}$  and  $x_1^{\beta}$  at the optimum are then printed with T that was previously set in **Step 1**. The procedure is repeated again from **Step 1** with  $T = T + \Delta T$ , until no more LLE is observed either by phase transition or complete miscibility.

## 3 Results and Discussion

## 3.1 Optimized NRTL Parameters

Optimal NRTL parameters  $\tau_{12}$  and  $\tau_{21}$  for pentane(1)/sulfolane(2) and hexane(1)/sulfolane(2) binary mixtures found in the steps introduced in **3.4** are presented in **Table 1** and **2**.

Table 1. Optimum  $\tau_{12}$  and  $\tau_{21}$  with corresponding O.F. value

1a. pentane(1)/sulfolane(2) mixture

1b.  $\tau_{12}$  and  $\tau_{21}$  for hexane (1)/sulfolane(2) mixture

T/K	$ au_{12}$	$ au_{21}$	O.F.	T/K	$ au_{12}$	$ au_{21}$	O.F.
304.31	5.681233	2.310832	0.0000000041	300.30	8.031419	4.234521	0.0000000378
310.80	5.344492	2.150315	0.0000000608	307.43	6.408498	3.562131	0.0000000237
320.72	4.855850	1.918148	0.0000000137	323.51	5.477957	3.157205	0.0000000482
330.41	4.366814	1.703825	0.0000000125	348.72	4.578427	2.772902	0.0000000229
340.50	3.883634	1.502780	0.0000000322	363.36	3.786722	2.545974	0.0000000584
350.15	3.438850	1.337284	0.0000000169	372.41	3.574560	2.314090	0.0000000619
354.82	3.228585	1.267422	0.0000000068	377.72	3.282047	2.240975	0.0000000234
359.64	3.006532	1.202645	0.0000000009	384.43	3.256661	2.154913	0.0000000296
364.75	2.770519	1.145041	0.0000000017	393.92	3.020774	2.065671	0.0000000108
369.78	2.532064	1.101131	0.0000000116	403.51	2.931650	1.924569	0.0000000006
374.11	2.320387	1.075143	0.0000000048	412.29	2.799578	1.830223	0.0000000225
376.49	2.201725	1.066399	0.0000000042	422.92	2.778481	1.662621	0.0000000273
379.39	2.053957	1.061791	0.0000000062	429.93	2.651154	1.542555	0.0000000010
380.35	2.005967	1.060672	0.0000000002				

NRTL parameters for the system presented by Ko et al. [10] are used as initial guesses for calculation at each temperature. Comparison of the parameters from the literature and from this work are presented in **Figure 2**. The optimum parameters (in **Table 1**) and the curve-fitted model are shown together in **Figure 3**.

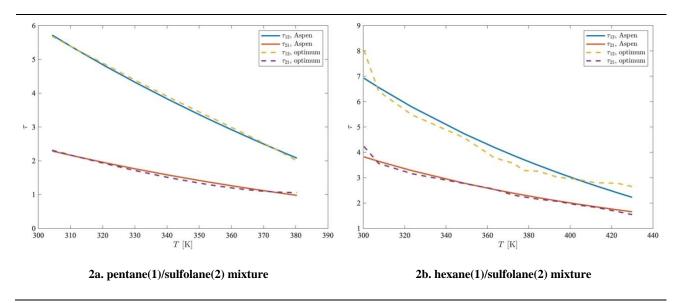


Figure 2. au values found in literature and optimized in this work

As shown in **Figure 2a**,  $\tau_{12}$  and  $\tau_{21}$  for pentane(1)/sulfolane(2) mixture calculated in this work (dashed lines) showed more linear and inversely proportional trend with regard to temperature compared to the parameters published in literature (solid lines), respectively [10], [11]. Although optimum parameters for hexane(1)/sulfolane(2) mixture showed irregular and rather undifferentiable curve profile as shown in **Figure 2b**, they showed more inversely proportional trend in general in lower temperature range and more linear or logarithmic trend in higher temperature range.

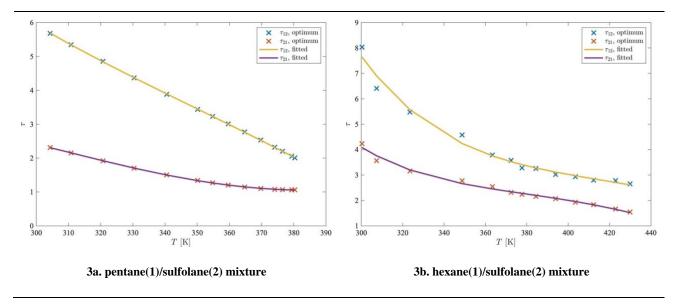


Figure 3. Optimum  $\tau$  values and curve-fitted models

The curve-fitted parameters for the model function are summarized in **Table 2**. Note that in this work, a new linear term  $(d_{12}T \text{ or } d_{21}T)$  is added to the model developed by Aspen Institute[11] to take account for linear trend.

Table 2. NRTL parameters for calculating  $\tau$  values

	pent	tane	hex	ane
parameters	Aspen This work		Aspen	This work
α	0.3	0.3	0.3	0.3
$a_{12}$	16.56	173.431	-20.24	-3322.2729
$a_{21}$	-21.29	-171.649	-21.29	-2499.5696
$b_{12}/{ m K}$	4095.84	-3696.772	5279.57	115152.3133
$b_{21}/\mathrm{K}$	2842.68	10300.836	3086.87	79997.7140
$c_{12}/(\ln { m K})^{-1}$	-4.25	-27.215	1.68	552.0269
$c_{21}/(\ln { m K})^{-1}$	2.49	24.508	2.6	422.1049
$d_{12}/\mathrm{K}^{-1}$	-	-0.422	-	-0.6751
$d_{21}/{ m K}^{-1}$	-	0.629	-	-0.5686

Aspen:  $\tau = a + b/T + c \ln T$ 

This work:  $\tau = a + b/T + c \ln T + dT$ 

## 3.2 LLE Diagrams by NRTL

With the parameters a, b, c, d that define the function  $\tau_{12}(T)$  and  $\tau_{21}(T)$  estimated in **4.2**, Now LLE diagram can be plotted by the steps introduced in **3.5**.

## 3.2.1 Pentane(1)/Sulfolane(2) Binary Mixture

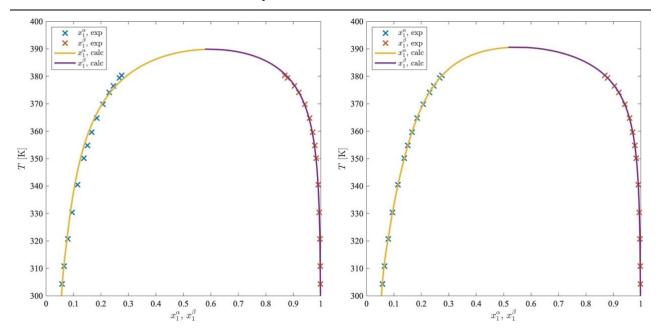


Figure 4. LLE of pentane(1)/sulfolane(2) mixture by NRTL from literature

Figure 5. LLE of pentane(1)/sulfolane(2) mixture by NRTL, this work

**Figure 4** and **5** present LLE diagram for pentane(1)/sulfolane(2) binary mixture calculated by NRTL model, with  $\tau$  functions developed by Aspen and optimized in this work, respectively. A quick

inspection shows the prediction done by NRTL model correlated in this work is more accurate especially in the sulfolane-rich  $\alpha$  phase (yellow solid line). Deviation of the calculation from the experimental data for each temperature are presented in **Table 3**. While the average absolute deviation (AAD) of Aspen NRTL model is 2.6283%, the calculation done in this work resulted in significantly more accurate results with AAD 0.1658%. It is also noteworthy that the maximum deviation observed in Aspen model is 8.5694 for  $x_1^{\alpha}$  at 350.15K, while the maximum deviation observed in this work is 0.5905% for  $x_1^{\alpha}$  at 320.72K. These entries are underlined in **Table 3**. This significant improvement of accuracy is achieved by 1) introduction of a linear term in  $\tau$  function as well as 2) more accurate curve-fitting.

Table 3. LLE of pentane(1)/sulfolane(2) binary mixture by NRTL, with parameters from literature and this work

	Exp NRTL literature			NRTL this work		Exp	NRTL literature		NRTL this work	
T/K	$x_1^{\beta}$	$x_1^{\beta}$	err(%)	$x_1^{\beta}$	err(%)	$x_1^{\alpha}$	$x_1^{\alpha}$	err(%)	$x_1^{\alpha}$	err(%)
304.31	0.9989	0.9989	0.0040	0.9989	0.0010	0.0584	0.0605	3.5274	0.0587	0.5822
310.80	0.9984	0.9984	0.0000	0.9984	0.0000	0.0661	0.0664	0.4841	0.0658	0.4690
320.72	0.9972	0.9971	0.0140	0.9971	0.0050	0.0796	0.0767	3.6181	0.0791	0.5905
330.41	0.9950	0.9947	0.0281	0.9950	0.0020	0.0952	0.0889	6.6702	0.0952	0.0210
340.50	0.9909	0.9903	0.0575	0.9910	0.0121	0.1148	0.1050	8.5366	0.1153	0.4443
350.15	0.9838	0.9827	0.1088	0.9839	0.0122	0.1377	0.1259	<u>8.5694</u>	0.1383	0.4285
354.82	0.9785	0.9771	0.1472	0.9785	0.0020	0.1507	0.1389	7.8235	0.1512	0.3052
359.64	0.9708	0.9691	0.1720	0.9707	0.0103	0.1661	0.1551	6.5984	0.1661	0.0120
364.75	0.9592	0.9574	0.1877	0.9589	0.0344	0.1849	0.1766	4.5051	0.1845	0.2271
369.78	0.9422	0.9409	0.1412	0.9417	0.0488	0.2071	0.2036	1.6659	0.2063	0.3911
374.11	0.9204	0.9205	0.0163	0.9201	0.0282	0.2303	0.2339	1.5632	0.2296	0.3040
376.49	0.9043	0.9058	0.1703	0.9043	0.0022	0.2455	0.2544	3.6293	0.2450	0.1874
379.39	0.8788	0.8830	0.4802	0.8795	0.0751	0.2672	0.2847	6.5344	0.2676	0.1347
380.35	0.8687	0.8739	0.5986	0.8695	0.0944	0.2756	0.2963	7.5181	0.2762	0.2177
			0.1518		0.0234			5.0888		0.3082

NRTL literature AAD (%): 2.6203 NRTL this work AAD (%): 0.1658

#### 3.2.2 Hexane(1)/Sulfolane(2) Binary Mixture

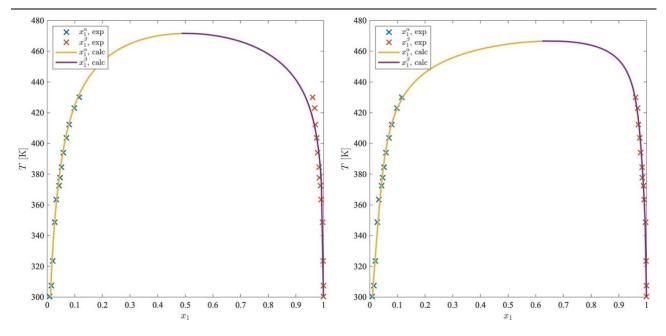


Figure 6. LLE of hexane(1)/sulfolane(2) mixture by NRTL from literature

Figure 7. LLE of hexane(1)/sulfolane(2) mixture by NRTL, this work

**Figure 6** and **7** present LLE diagram for hexane(1)/sulfolane(2) binary mixture calculated by NRTL model, with  $\tau$  functions developed by Aspen and optimized in this work, respectively. Similarly to hexane(1)/sulfolane(2) mixture, the prediction done by NRTL model correlated in this work is more accurate especially in the sulfolane-rich  $\alpha$  phase (yellow solid line). Deviation of the calculation from the experimental data for each temperature are presented in **Table 4**. While the average absolute deviation (AAD) of Aspen NRTL model is 3.6790%, the calculation done in this work resulted in significantly more accurate results with AAD 2.8920%. It is also noteworthy that the maximum deviation observed in Aspen model is 32.6087 for  $x_1^{\alpha}$  at 300.30K, while the maximum deviation observed in this work is 12.6000% for  $x_1^{\alpha}$  at 370.43K. These entries are underlined in **Table 4**. This significant improvement of accuracy is achieved by 1) introduction of a linear term in  $\tau$  function as well as 2) more accurate curve-fitting.

5.6540

				11500						
	Exp		RTL ature		RTL work	Exp	1	RTL ature		RTL work
T/K	$x_1^{\beta}$	$x_1^{\beta}$	err(%)	$x_1^{\beta}$	err(%)	$x_1^{\alpha}$	$x_1^{\alpha}$	err(%)	$x_1^{\alpha}$	err(%)
300.30	0.9999	0.9997	0.0200	0.9999	0.0050	0.0092	0.0122	32.6087	0.0103	11.5217
307.43	0.9995	0.9996	0.0070	0.9997	0.0190	0.0150	0.0140	6.6000	0.0131	12.6000
323.51	0.9987	0.9991	0.0360	0.9988	0.0120	0.0203	0.0186	8.1281	0.0197	3.1527
348.72	0.9966	0.9971	0.0532	0.9951	0.1535	0.0276	0.0279	1.0507	0.0302	9.3116
363.36	0.9918	0.9948	0.2984	0.9914	0.0393	0.0332	0.0349	5.1205	0.0370	11.3253
372.41	0.9893	0.9925	0.3235	0.9887	0.0586	0.0432	0.0401	7.1065	0.0418	3.3565
377.72	0.9849	0.9908	0.5970	0.9870	0.2142	0.0469	0.0436	7.0362	0.0449	4.2857
384.43	0.9842	0.9881	0.3932	0.9847	0.0508	0.0520	0.0485	6.7115	0.0493	5.0962
393.92	0.9788	0.9829	0.4230	0.9811	0.2380	0.0584	0.0567	2.9281	0.0570	2.4658
403.51	0.9756	0.9756	0.0021	0.9770	0.1404	0.0698	0.0668	4.2550	0.0669	4.0974
412.29	0.9706	0.9663	0.4441	0.9724	0.1824	0.0794	0.0784	1.3098	0.0792	0.2519
422.92	0.9681	0.9501	1.8614	0.9650	0.3181	0.0980	0.0963	1.7143	0.1004	2.4286
429.93	0.9608	0.9352	2.6644	0.9583	0.2571	0.1161	0.1115	3.9621	0.1203	3.6090

Table 4. LLE of hexane(1)/sulfolane(2) binary mixture by NRTL, with parameters from literature and this work

NRTL literature AAD (%): 3.6790 NRTL this work AAD (%): 2.8920

0.5479

#### 3.3 Limitations

Although LLE calculations for both mixtures (pentane/sulfolane and hexane/sulfolane) showed great accuracy, some limitations exist for this project:

0.1299

6.8101

- 1) Since two parameters,  $\tau_{12}$  and  $\tau_{21}$  have to be optimized, the optimum for objective function was found by a simple search method for both parameters in this project, Although this method has an advantage that local minimum can be avoided, it has a significant limitation that long computing time is required to yield high-precision results. For example, calculating optimum parameters for 13 datapoints for hexane/sulfolane binary system with search range  $\pm 1.5$  from initial guess and step size 0.0002 took 713 seconds and 667 seconds for pentane/sulfolane and hexane/sulfolane binary mixture, respectively total. The objective function values were all optimized lower than  $10^{-7}$  in both systems.
- 2) The focus on this project was on binary mixtures containing an alkane (pentane and hexane) and sulfolane. However, for practical applications, binary LLE predictions offer limited utility compared to ternary or other multi-component mixtures. Nevertheless, this report can serve as a good introduction to understanding principles of LLE using sulfolane as a solvent.

## 4 Conclusion

Local-composition models for LLE (liquid-liquid equilibrium) were reviewed, and representation of activity coefficient for each component from the excess Gibbs free energy was presented for Wilson equation and NRTL Requirement for LLE in terms of phase stability was given from the Gibbs energy change of mixing and qualitative analysis of Gibbs energy-composition diagram was made.

A new temperature-dependent function for NRTL(non-random-two-liquid) model were developed with an added linear term, and the parameters were fitted to experimental data for two alkane(pentane or hexane)/sulfolane binary mixtures from literature, yielding greatly improved accuracy compared to NRTL model with temperature-dependent function developed by Aspen Institute. LLE tie-lines for the two systems were obtained from 300K to UCST.

The parameter optimization was highly accurate with minimizing the isoactivity objective function as small as  $10^{-7}$ , however, the process took more than 10 minutes for each dataset due to its simple search method. More efficient ways to find the optima can be further studied to perform in the same accuracy with reduced computing time.

## 5 References

- [1] J. A. Vidueira, "Processes for the separation of aromatic hydrocarbons from a hydrocarbon mixture," US 5225072; A, 1997.
- [2] W. A. Sweeney and P. F. Bryan, "BTX Processing," in *Kirk-Othmer Encyclopedia of Chemical Technology*, John Wiley & Sons, Inc., 2000.
- [3] 서영웅, "[에너지학개론] 제 26강. 방향족 생산공정," 2020. https://gscaltexmediahub.com/energy/study-aromaticity-production-202006/ (accessed Nov. 17, 2021).
- [4] A. Bak, V. Kozik, P. Dybal, S. Kus, A. Swietlicka, and J. Jampilek, "Sulfolane: Magic extractor or bad actor? Pilot-scale study on solvent corrosion potential," *Sustain.*, vol. 10, no. 10, 2018, doi: 10.3390/su10103677.
- [5] Thyssenkrupp, "World Market Leader in Aromatics Extraction," 2014.
- [6] J. M. Sørensen, T. Magnussen, P. Rasmussen, and A. Fredenslund, "Liquid-liquid equilibrium data: Their retrieval, correlation and prediction Part I: Retrieval," *Fluid Phase Equilib.*, vol. 2, no. 1, pp. 297–309, 1979, doi: 10.1016/0378-3812(79)80027-8.
- [7] J. M. Smith, H. C. Van Ness, M. M. Abbott, and M. T. Swihart, *Introduction to Chemical Engineering Thermodynamics*, 8th ed. McGraw-Hill Education, 2018.
- [8] M. B. Mane and S. N. Shinde, "Vapor Liquid Equilibria: a Review," *Sci. Revs. Chem. Commun*, vol. 2, no. 2, pp. 158–171, 2012, [Online]. Available: www.sadgurupublications.com.
- [9] J. M. Sørensen, T. Magnussen, P. Rasmussen, and A. Fredelslund, "Liquid-liquid equilibrium data: Their retrieval, correlation and prediction Part II: Correlation," *Fluid Phase Equilib.*, vol. 3, no. 1, pp. 47–82, 1979, doi: 10.1016/0378-3812(79)80027-8.
- [10] M. Ko, J. Im, J. Y. Sung, and H. Kim, "Liquid-liquid equilibria for the binary systems of sulfolane with alkanes," *J. Chem. Eng. Data*, vol. 52, no. 4, pp. 1464–1467, 2007, doi: 10.1021/je7001607.
- [11] Aspen Institution, "2. Thermodynamic Property Models," 2005.

## 6 Appendix

## Appendix A. Calculation of Activity Coefficient from Local-Composition Models

#### **A.1 Wilson Equation**

The relation between the activity coefficient and excess Gibbs free energy is shown as below.

$$\ln \gamma_1 = \frac{\bar{G}_1^E}{RT} = \frac{G^E}{RT} + x_2 \frac{d\left(\frac{G^E}{RT}\right)}{dx_1}$$

$$\ln \gamma_2 = \frac{\bar{G}_2^E}{RT} = \frac{G^E}{RT} - x_1 \frac{d\left(\frac{G^E}{RT}\right)}{dx_1}$$

$$\frac{G^E}{RT} = -[x_1 \ln(x_1 + (1 - x_1)\Lambda_{12}) + (1 - x_1)\ln(x_1\Lambda_{21} + 1 - x_1)]$$

$$= -[x_1 \ln(x_1(1 - \Lambda_{12}) + \Lambda_{12}) + (1 - x_1)\ln(x_1(\Lambda_{21} - 1) + 1)]$$

$$\frac{d}{dx_1} \left( \frac{G^E}{RT} \right) = - \left[ \ln(x_1 + x_2 \Lambda_{12}) + \frac{x_1 (1 - \Lambda_{12})}{x_1 + x_2 \Lambda_{12}} - \ln(x_1 \Lambda_{21} + x_2) + \frac{x_2 (\Lambda_{21} - 1)}{x_1 \Lambda_{21} + x_2} \right]$$

For activity coefficient of species 1,

$$\ln \gamma_1 = \frac{G^E}{RT} + x_2 \frac{d\left(\frac{G^E}{RT}\right)}{dx_1}$$

$$= -x_1 \left[\ln(x_1 + x_2\Lambda_{12}) + x_2 \ln(x_2 + x_1\Lambda_{21})\right]$$

$$-\left[x_2 \ln(x_1 + x_2\Lambda_{12}) + \frac{x_1x_2(1 - \Lambda_{12})}{x_1 + x_2\Lambda_{12}} - x_2 \ln(x_1\Lambda_{21} + x_2) + \frac{x_2^2(\Lambda_{21} - 1)}{x_1\Lambda_{21} + x_2}\right]$$

$$= -\left[\ln(x_1 + x_2\Lambda_{12}) + x_2\left(\frac{x_1(1 - \Lambda_{12})}{x_1 + x_2\Lambda_{12}} + \frac{x_2(\Lambda_{21} - 1)}{x_2 + x_1\Lambda_{21}}\right)\right]$$

$$\begin{split} \frac{x_1(1-\Lambda_{12})}{x_1+x_2\Lambda_{12}} + \frac{x_2(\Lambda_{21}-1)}{x_2+x_1\Lambda_{21}} &= \frac{x_1(1-\Lambda_{12})(x_2+x_1\Lambda_{21}) + x_2(\Lambda_{21}-1)(x_1+x_2\Lambda_{12})}{(x_1+x_2\Lambda)(x_2+x_1\Lambda_{21})} \\ &= \frac{x_1^2\Lambda_{21} + x_1x_2 - x_1^2\Lambda_{12}\Lambda_{21} - x_1x_2\Lambda_{12} + x_1x_2\Lambda_{21} + x_2^2\Lambda_{21}\Lambda_{12} - x_1x_2 - x_2^2\Lambda_{12}}{(x_1+x_2\Lambda_{12})(x_2+x_1\Lambda_{21})} \\ &= \frac{x_1\Lambda_{21} + (x_2-x_1)\Lambda_{21}\Lambda_{12} - x_2\Lambda_{12}}{(x_1+x_2\Lambda_{12})(x_2+x_1\Lambda_{21})} = \frac{\Lambda_{21}}{x_2+x_1\Lambda_{21}} - \frac{\Lambda_{12}}{x_1+x_2\Lambda_{12}} \\ & \therefore \ln \gamma_1 = -\left[\ln(x_1+x_2\Lambda_{12}) + x_2\left(\frac{\Lambda_{21}}{x_2+x_1\Lambda_{21}} - \frac{\Lambda_{12}}{x_1+x_2\Lambda_{12}}\right)\right] \end{split}$$

Activity coefficient of species 2 is calculated likewise:

$$\begin{split} \ln \gamma_2 &= -[x_1 \ln(x_1 + x_2 \Lambda_{12}) + x_2 \ln(x_2 + x_1 \Lambda_{21})] \\ &+ \left[ x_1 \ln(x_1 + x_2 \Lambda_{12}) + \frac{x_1^2 (1 - \Lambda_{12})}{x_1 + x_2 \Lambda_{12}} - x_1 \ln(x_1 \Lambda_{21} + x_2) + \frac{x_1 x_2 (\Lambda_{21} - 1)}{x_1 \Lambda_{21} + x_2} \right] \\ &= \left[ \ln(x_2 + x_1 \Lambda_{21}) - x_1 \left( \frac{x_1 (1 - \Lambda_{12})}{x_1 + x_2 \Lambda_{12}} + \frac{x_2 (\Lambda_{21} - 1)}{x_2 + x_1 \Lambda_{21}} \right) \right] \end{split}$$

$$\begin{split} \frac{x_1(1-\Lambda_{12})}{x_1+x_2\Lambda_{12}} + \frac{x_2(\Lambda_{21}-1)}{x_2+x_1\Lambda_{21}} &= \frac{x_1(1-\Lambda_{12})(x_2+x_1\Lambda_{21}) + x_2(\Lambda_{21}-1)(x_1+x_2\Lambda_{12})}{(x_1+x_2\Lambda_{12})(x_2+x_1\Lambda_{21})} \\ &= \frac{x_1^2\Lambda_{21} + x_1x_2 - x_1^2\Lambda_{12}\Lambda_{21} - x_1x_2\Lambda_{12} + x_1x_2\Lambda_{21} + x_2^2\Lambda_{12}\Lambda_{21} - x_1x_2 - x_2^2\Lambda_{12}}{(x_1+x_2\Lambda_{12})(x_2+x_1\Lambda_{21})} \\ &= \frac{x_1\Lambda_{21} + (x_2^2-x_1^2)\Lambda_{12}\Lambda_{21} - x_2\Lambda_{12}}{(x_1+x_2\Lambda_{12})(x_2+x_1\Lambda_{21})} = \frac{\Lambda_{21}}{x_2+x_1\Lambda_{21}} - \frac{\Lambda_{12}}{x_1+x_2\Lambda_{12}} \end{split}$$

For infinite dilution  $(x_1 \rightarrow 0 \text{ or } x_2 \rightarrow 0)$ , these equations become :

$$\lim_{\substack{x_1 \to 0 \\ (x_2 \to 1)}} \ln \gamma_1 = \ln \gamma_1^{\infty} = -\ln \Lambda_{12} + 1 - \Lambda_{21}$$

$$\lim_{\substack{x_2 \to 0 \\ (x_1 \to 1)}} \ln \gamma_2 = \ln \gamma_2^{\infty} = -\ln \Lambda_{21} + 1 - \Lambda_{12}$$

#### A.2 NRTL

Using NRTL, the relation between the activity coefficient and excess Gibbs free energy is expressed as follows.

$$\frac{G^E}{RT} = x_1 x_2 \left( \frac{G_{21} \tau_{21}}{x_1 + x_2 G_{21}} + \frac{G_{12} \tau_{12}}{x_2 + x_1 G_{12}} \right) = \frac{G_{21} \tau_{21} x_1 x_2}{x_1 + x_2 G_{21}} + \frac{G_{12} \tau_{12} x_1 x_2}{x_2 + x_1 G_{12}}$$

$$\begin{split} \frac{d}{dx_1} \left( \frac{G^E}{RT} \right) &= \frac{(x_2 - x_1)(x_1 + x_2 G_{21}) G_{21} \tau_{21} - (1 - G_{21}) G_{21} \tau_{21} x_1 x_2}{(x_1 + x_2 G_{21})^2} \\ &\quad + \frac{(x_2 - x_1)(x_2 + x_1 G_{12}) G_{12} \tau_{12} - (G_{12} - 1) G_{12} \tau_{12} x_1 x_2}{(x_2 + x_1 G_{12})^2} \\ &\quad = \frac{G_{21} \tau_{21} x_1 x_2 + G_{21}^2 \tau_{21} x_2^2 - G_{21} \tau_{21} x_1^2 - G_{21}^2 \tau_{21} x_1 x_2 - G_{21} \tau_{21} x_1 x_2 + G_{21}^2 \tau_{21} x_1 x_2}{(x_1 + x_2 G_{21})^2} \\ &\quad + \frac{G_{12} \tau_{12} x_2^2 + G_{12}^2 \tau_{12} x_1 x_2 - G_{12} \tau_{12} x_1 x_2 - G_{12}^2 \tau_{12} x_1^2 - G_{12}^2 \tau_{12} x_1 x_2 + G_{12} \tau_{12} x_1 x_2}{(x_2 + x_1 G_{12})^2} \end{split}$$

$$\begin{split} \ln \gamma_1 &= \frac{G^E}{RT} + x_2 \frac{d \left(\frac{G^E}{RT}\right)}{dx_1} \\ &= \frac{G_{21}\tau_{21}x_1x_2}{x_1 + x_2G_{21}} + \frac{G_{12}\tau_{12}x_1x_2}{x_2 + x_1G_{12}} + \frac{G_{21}^2\tau_{21}x_2^3 - G_{21}\tau_{21}x_1^2x_2}{(x_1 + x_2G_{21})^2} + \frac{G_{12}\tau_{12}x_2^3 - G_{12}^2\tau_{12}x_1^2x_2}{(x_2 + x_1G_{12})^2} \\ &= \frac{G_{21}\tau_{21}x_1x_2(x_1 + x_2G_{21}) + G_{21}^2\tau_{21}x_2^3 - G_{21}\tau_{21}x_1^2x_2}{(x_1 + x_2G_{21})^2} \\ &+ \frac{G_{12}\tau_{12}x_1x_2(x_2 + x_1G_{12}) + G_{12}\tau_{12}x_2^3 - G_{12}^2\tau_{12}x_1^2x_2}{(x_2 + x_1G_{12})^2} \\ &= \frac{G_{21}\tau_{21}x_1^2x_2 + G_{21}^2\tau_{21}x_1x_2^2 + G_{21}^2\tau_{21}x_2^3 - G_{21}\tau_{21}x_1^2x_2}{(x_1 + x_2G_{21})^2} \\ &+ \frac{G_{12}\tau_{12}x_1x_2^2 + G_{21}^2\tau_{21}x_1x_2^2 + G_{21}^2\tau_{21}x_2^3 - G_{21}^2\tau_{12}x_1^2x_2}{(x_2 + x_1G_{12})^2} \\ &= \frac{x_2^2G_{21}^2\tau_{21}}{(x_1 + x_2G_{21})^2} + \frac{x_2^2G_{12}\tau_{12}}{(x_2 + x_1G_{12})^2} \end{split}$$

$$\therefore \ln \gamma_1 = x_2^2 \left[ \tau_{21} \left( \frac{G_{21}}{x_1 + x_2 G_{21}} \right)^2 + \frac{G_{12} \tau_{12}}{x_2 + x_1 G_{12}} \right]$$

Likewise,

$$\begin{split} \ln \gamma_2 &= \frac{G_{21}\tau_{21}x_1x_2}{x_1 + x_2G_{21}} + \frac{G_{12}\tau_{12}x_1x_2}{x_2 + x_1G_{12}} - \frac{G_{21}^2\tau_{21}x_1x_2^2 - G_{21}\tau_{21}x_1^3}{(x_1 + x_2G_{21})^2} - \frac{G_{12}^2\tau_{12}x_1x_2^2 - G_{12}^2\tau_{12}x_1^3}{(x_2 + x_1G_{12})^2} \\ &= \frac{G_{21}\tau_{21}x_1^2x_2 + G_{21}^2\tau_{21}x_1x_2^2 - G_{21}^2\tau_{21}x_1x_2^2 + G_{21}\tau_{21}x_1^3}{(x_1 + x_2G_{21})^2} \\ &\quad + \frac{G_{12}\tau_{12}x_1x_2^2 + G_{12}^2\tau_{12}x_1^2x_2 - G_{12}\tau_{12}x_1x_2^2 + G_{12}^2\tau_{12}x_1^3}{(x_2 + x_1G_{12})^2} \\ &= \frac{x_1^2G_{21}\tau_{21}}{(x_1 + x_2G_{21})^2} + \frac{x_1^2G_{12}^2\tau_{12}}{(x_2 + x_1G_{12})^2} \end{split}$$

$$\therefore \ln \gamma_2 = x_1^2 \left[ \tau_{12} \left( \frac{G_{!2}}{x_2 + x_! G_{12}} \right)^2 + \frac{G_{21} \tau_{21}}{x_1 + x_2 G_{21}} \right]$$

The infinite-dilution( $x_1 \rightarrow 0$  or  $x_2 \rightarrow 0$ ) values of the activity coefficients are given by equations :

$$\lim_{\substack{x_1 \to 0 \\ (x_2 \to 1)}} \ln \gamma_1 = \ln \gamma_1^{\infty} = \tau_{21} + \tau_{12} G_{12} = \tau_{21} + \tau_{12} \exp(-\alpha \tau_{12})$$


$$\lim_{\substack{x_2 \to 0 \\ (x_1 \to 1)}} \ln \gamma_2 = \ln \gamma_2^{\infty} = \tau_{12} + \tau_{21} G_{21} = \tau_{12} + \tau_{21} \exp(-\alpha \tau_{21})$$

#### **Appendix B. MATLAB® Codes with Execution Results**

## **B.1 Gibbs Energy Diagram** ('Gx\_plot.m')

```
clear all
close all
clc
% alkane = 'pentane'; T_range = [300 325 350 375 400 425];
alkane = 'hexane'; T range = [380 400 420 440 460 480];
load([alkane '_expdata.mat'])
load([alkane '_parameters'])
load([alkane '_parameters_opt.mat'])
parameters = parameters_Aspen;
parameters = parameters_opt;
set(groot, 'defaultLineMarkerSize', 10, ...
    'defaultLineLineWidth', 1, ...
    'defaultAxesFontName', 'Times', ...
    'defaultAxesFontSize', 12);
expT = data(:,1);
expX11 = data(:,2);
expX12 = data(:,3);
Gxplot = figure('Position',[0 0 400 600]);
dGxplot = figure('Position', [400 0 400 600]);
ddGxplot = figure('Position',[800 0 400 600]);
figure (2), plot (linspace (0,1,1001), 0, '-k');
m = 100000;
stop = 0;
for j = 1:6
    if stop == 1
        break
    end
   T = T_range(j);
   for i = 1:m+1
        x1(i) = (i-1)/m;
        deltaGRT(i) = G_NRTL(parameters, T,x1(i));
    end
    for i = 1:m
        d deltaGRT(i) = ( deltaGRT(i+1) - deltaGRT(i) ) / (1/m);
    for i = 1:m-1
        dd deltaGRT(i) = ( d deltaGRT(i+1) - d deltaGRT(i) ) / (1/m);
    figure(1),plot(x1,deltaGRT,'DisplayName',[num2str(T) 'K']); hold on
    xlim([0 1]);
    figure(2),plot(x1(1:m),d_deltaGRT,'DisplayName',[num2str(T) 'K']); hold on
    xlim([0 1]); ylim([-5 5])
    figure(3),plot(x1(1:m-1),dd_deltaGRT,'DisplayName',[num2str(T) 'K']); hold on
    xlim([0 1]); ylim([-5 5])
end
figure(1),legend('Location','northwest','AutoUpdate','off')
xlabel('$$x 1$$','Interpreter','latex')
exportgraphics(gca,[alkane 'G.jpg'],'Resolution',300)
```

```
figure(2),legend('Location','southwest','AutoUpdate','off')
yline(0,'LineWidth',1)
xlabel('$$x_1$$','Interpreter','latex')
exportgraphics(gca,[alkane '_dG.jpg'], 'Resolution', 300)
figure(3),legend('Location','southwest','AutoUpdate','off')
yline(0,'LineWidth',1)
xlabel('$$x_1$$','Interpreter','latex')
exportgraphics(gca,[alkane '_ddG.jpg'],'Resolution',300)
function delta_GRT = G_NRTL(parameters, T,x1)
alpha = 0.3;
a12 = parameters(1);
b12 = parameters(2);
c12 = parameters(3);
d12 = parameters(4);
a21 = parameters(5);
b21 = parameters(6);
c21 = parameters(7);
d21 = parameters(8);
tau12 = a12 + b12/T + c12*log(T) + d12*T;
tau21 = a21 + b21/T + c21*log(T) + d21*T;
G12 = \exp(-alpha*tau12);
G21 = exp(-alpha*tau21);
x2 = 1 - x1;
delta_GRT = (x1*log(x1) + x2*log(x2) ...
    + x1*x2*( (G21*tau21)/(x1+x2*G21) + (G21*tau12)/(x2+x1*G12) ));
end
```

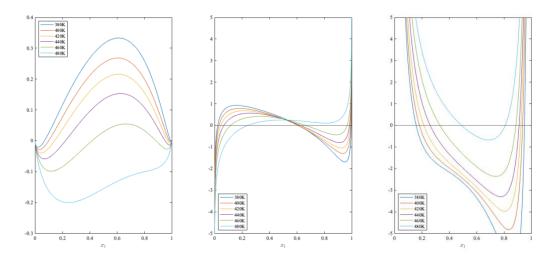

#### **B.2 NRTL Parameter Optimization** ('find tau.m')

```
clear all
close all
% clc
% alkane = 'pentane'; lb = 0; ub = 6;
alkane = 'hexane'; lb = 1; ub = 9;
fprintf(['\n\ << FOR ' upper(alkane) ' >> \n'])
load([alkane ' expdata.mat'])
load([alkane '_parameters'])
a12 = parameters Aspen(1);
b12 = parameters Aspen(2);
c12 = parameters Aspen(3);
a21 = parameters Aspen(5);
b21 = parameters_Aspen(6);
c21 = parameters Aspen(7);
tau12 Aspen = a12 + b12./data(:,1) + c12.*log(data(:,1));
tau21 Aspen = a21 + b21./data(:,1) + c21.*log(data(:,1));
set(groot, 'defaultLineMarkerSize', 10, ...
    'defaultLineLineWidth', 2, ...
'defaultAxesFontName', 'Times',
    'defaultAxesFontSize', 12, ...
    'defaultLegendFontSize', 12);
expT = data(:,1);
expX11 = data(:,2);
expX12 = data(:,3);
clear data
           % Adjust precision of finding optimal tau
m = 5000;
range = 3;
% fprintf(' m = %d\n',m)
fprintf('=======\n')
fprintf(' T/K tau12 tau21 OF\n')
fprintf('----
for k = 1 : size(expT)
    T = expT(k);
    x11 = expX11(k);
    x12 = expX12(k);
    [tau12\_opt(k), tau21\_opt(k), OF(k)] = opt tau(tau12 Aspen(k), tau21 Aspen(k), x11,
x12, m, range);
    fprintf(' %.2f %f %f %.10f\n', ...
        T, tau12_opt(k), tau21_opt(k), OF(k))
fprintf('----\n')
toc
tau12_opt = tau12_opt';
tau21 opt = tau21 opt';
fig = figure('Position',[0 10000 600 400]);
plot(expT,tau12_Aspen,'DisplayName','$\tau_{12}$, ${\mathrm {Aspen}}$'); hold on
plot(expT,tau21_Aspen,'DisplayName','$\tau_{21}$, ${\mathrm {Aspen}}$');
plot(expT, tau12_opt, '--', 'DisplayName', '$\tau_{12}$, ${\mathrm {optimum}}$');
plot(expT, tau21 opt, '--', 'DisplayName', '$\tau {21}$, ${\mathrm {optimum}}$');
xlabel('$$T$$ $${\mathrm {[K]}}$$','Interpreter','latex')
```

```
ylabel('$$\tau$$', 'Interpreter','latex')
% xlim([300 390])
ylim([lb ub])
legend('Interpreter','latex')
exportgraphics(gca,[alkane ' tau comparison.jpg'], 'Resolution', 300)
T data = expT;
tau12_data = tau12_opt;
tau21_data = tau21_opt;
clear expT tau12_opt tau21_opt
opts = optimset('Display','off');
fun = 0(k, xdata) k(1) + k(2)./xdata + k(3).*log(xdata) +k(4)*xdata;
k12 0 = [6,1,0,-1];
k21 0 = [2,1,0,-1];
k12 = lsqcurvefit(fun, k12 0, T data, tau12 data,[],[],opts);
k21 = lsqcurvefit(fun, k21 0, T data, tau21 data,[],[],opts);
fprintf('\n')
fprintf(' Fitted coefficients:\n\n')
fprintf(' a12 %11.4f
                         ', k12(1))
fprintf(' a21 %11.4f\n', k21(1))
fprintf(' b12 %11.4f ', k12(2))
fprintf(' b21 %11.4f\n', k21(2))
fprintf(' c12 %11.4f ', k12(3))
fprintf(' c21 %11.4f\n', k21(3))
fprintf(' d12 %11.4f ', k12(4))
fprintf(' d21 %11.4f\n', k21(4))
parameters opt = [k12, k21];
save([alkane ' parameters opt.mat'], 'parameters opt')
tau12 fitted = fun(k12,T data);
tau21 fitted = fun(k21,T data);
fig = figure('Position',[0 0 600 400]);
plot(T_data,tau12_data,'x'); hold on
plot(T_data, tau21 data, 'x');
plot(T_data,tau12_fitted,'-');
plot(T_data,tau21_fitted,'-');
legend(...
     '$$\tau {12}$$, $\mathrm{optimum}$', ...
     '$$\tau_{21}$$, $\mathrm{optimum}$', ...
    '$$\tau_{12}$$, $\mathrm{fitted}$', ...
    '$$\tau_{21}$$, $\mathrm{fitted}$', ...
'Interpreter', 'latex', 'Location', 'northeast')
xlabel('$$T$$ $${\mathrm {[K]}}$$','Interpreter','latex')
ylabel('$$\tau$$', 'Interpreter', 'latex')
% xlim([300 390])
ylim([lb ub])
exportgraphics(gca,[alkane '_tau_fitted.jpg'],'Resolution',300)
function [tau12_opt, tau21_opt, OF] = opt_tau(tau12_in, tau21_in, x1alpha, x1beta, m,
range)
    alpha = 0.3;
    for i = 1: m
         tau12 = tau12_in + range * (-0.5 + i/m);
         for j = 1: m
             tau21 = tau21_in + range * (-0.5 + j/m);
             G12 = \exp(-alpha*tau12);
             G21 = \exp(-alpha*tau21);
```

```
x1 = x1alpha;
           x2 = 1 - x1;
           gamma12 = exp(x2^2 * (tau21*(G21/(x1+x2*G21))^2 + G12*tau12/
(x2+x1*G12)^2);
           gamma22 = exp(x1^2 * (tau12*(G12/(x2+x1*G12))^2 + G21*tau21/
(x1+x2*G21)^2);
           k11 = x1*gamma12;
           k21 = x2*gamma22;
           x1 = x1beta;
           x2 = 1 - x1;
           gamma11 = exp(x2^2 * (tau21*(G21/(x1+x2*G21))^2 + G12*tau12/
(x2+x1*G12)^2);
           gamma21 = exp(x1^2 * (tau12*(G12/(x2+x1*G12))^2 + G21*tau21/
(x1+x2*G21)^2);
           k12 = x1*qamma11;
           k22 = x2*gamma21;
           OF(i,j) = (k11 - k12)^2 + (k21 - k22)^2;
       end
   end
    [minOF1, index1] = min(OF);
    [minOF2, index2] = min(minOF1);
   ind1 = index1(index2);
   ind2 = index2;
   OF = minOF2;
   tau12_opt = tau12_in + range * (-0.5 + ind1/m);
   tau21 opt = tau21 in + range * (-0.5 + ind2/m);
end
```

#### << FOR HEXANE >>

```
______
 T/K tau12 tau21 OF
 300.30 8.031419 4.234521 0.0000000378

      307.43
      6.408498
      3.562131
      0.0000000237

      323.51
      5.477957
      3.157205
      0.0000000482

 348.72 4.578427 2.772902 0.0000000227
 363.36 3.786722 2.545974 0.0000000564
 372.41 3.574560 2.314090 0.0000000619

      377.72
      3.282047
      2.240975
      0.0000000234

      384.43
      3.256661
      2.154913
      0.0000000296

 393.92 3.020774 2.065671 0.0000000108
403.51 2.931650 1.924569 0.0000000006
 412.29 2.799578 1.830223 0.0000000225
 422.92 2.778481 1.662621 0.0000000273
429.93 2.651154 1.542555 0.0000000010
-----
Elapsed time is 659.200407 seconds.
Fitted coefficients:
a12 -3322.2729
                       a21 -2499.5696
                       b21 79997.7140
b12 115152.3133
 c12
      552.0269
                       c21
                              422.1049
 d12
         -0.6751
                       d21
                                -0.5686
```

#### **B.3 NRTL LLE Calculation ('LLE\_NRTL.m')**


#### **Contents**


- Full LLE Diagram
- NRTL Result for Error Analysis
  - <u>Function</u>

#### **Full LLE Diagram**

```
clear all
close all
clc
% alkane = 'pentane'; Tlb = 300; Tub = 400;
alkane = 'hexane'; Tlb = 300; Tub = 480;
load([alkane '_expdata.mat'])
load([alkane '_tau_Aspen.mat'])
load([alkane '_parameters'])
load([alkane '_parameters_opt.mat'])
set(groot, 'defaultLineMarkerSize', 10, ...
    'defaultLineLineWidth', 2, ...
'defaultAxesFontName', 'Times New Roman', ...
'defaultAxesFontSize', 12);
T data = data(:,1);
x\overline{11}_data = data(:,2);
x12_data = data(:,3);
tic
for par = 1:2
clear result
    fprintf('\n\n')
    if par ==1
         parameters = parameters Aspen;
         fprintf(' Parameters from Aspen')
         parameters = parameters opt;
         fprintf(' Parameters optimized')
     end
fprintf('\n')
fprintf('========\n')
fprintf(' T/K x11 x12\n')
fprintf('---
x12 in = 0;
x11_in = 1;
for k = 1:2000
    T = 300 + 0.1*(k-1);
    result(k,1) = T;
    fprintf(' %.1f ', T)
     [result(k,3), result(k,2), \sim, \sim, \sim] = NRTL(x12_in, x11_in, parameters, T);
     if result(k,3) >= result(k,2)
         fprintf(' NO LLE!\n')
         result(k,:) = [];
         k = k-1;
         break
     end
     fprintf(' 0.4f \ 0.4f \ , result(k,2), result(k,3))
     x12 in = result(k,3);
    x11_in = result(k, 2);
```

```
end
fprintf('\n')
toc
LLE = figure('Position',[0 0 500 500]);
plot(x12 data, T data, 'x'); hold on
plot(x11_data, T_data, 'x');
plot(result(:,3), result(:,1), '-');
plot(result(:,2), result(:,1), '-');
pbaspect([1 1 1])
xlim([0 1])
ylim([Tlb Tub])
legend(...
     '$$x_1^\alpha$$, $${\mathrm {exp}}$$', ...
'$$x_1^\beta$$, $${\mathrm {exp}}$$', ...
'$$x_1^\alpha$$, $${\mathrm {calc}}$$', ...
'$$x_1^\beta$$, $${\mathrm {calc}}$$', ...
     'Interpreter', 'latex', ...
     'Location', 'northwest')
xlabel('$$x_1$$','Interpreter','latex')
ylabel('$$T$$ $${\mathrm {[K]}}$$','Interpreter','latex')
exportgraphics(gca,[alkane '_LLE_' num2str(par) '.jpg'],'Resolution',300)
```

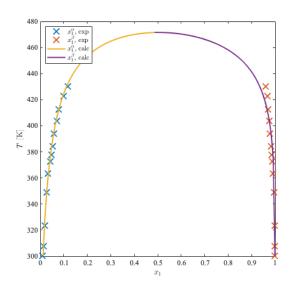

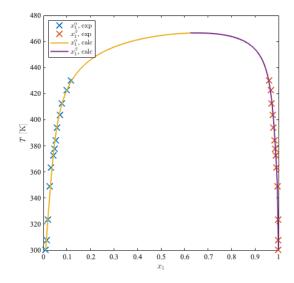

#### **NRTL Result for Error Analysis**

```
clear all
close all
% clc

% alkane = 'pentane'; Tlb = 300; Tub = 400;
alkane = 'hexane'; Tlb = 300; Tub = 480;

load([alkane '_expdata.mat'])
load([alkane '_tau_Aspen.mat'])
load([alkane '_parameters'])
load([alkane '_parameters_opt.mat'])

set(groot, 'defaultLineMarkerSize', 10, ...
   'defaultLineLineWidth', 2, ...
   'defaultAxesFontName', 'Times New Roman', ...
   'defaultAxesFontSize', 12);
```

```
T data = data(:,1);
x11 data = data(:,2);
x12_{data} = data(:,3);
for par = 1:2
           fprintf('\n\n')
            if par ==1
                      parameters = parameters_Aspen;
                       fprintf([' < ' upper(alkane) '/SULFOLANE > w/ parameters from literature'])
                      parameters = parameters_opt;
fprintf([' < ' upper(alkane) '/SULFOLANE > w/ parameters optimized'])
           end
           fprintf('\n')
            fprintf('=====
           fprintf('-----
           x12 in = 0;
            x11^{-}in = 1;
            tic
           for k = 1:size(T data)
                        T = T data(k);
                        result(k,1) = T;
                        [result(k,3), result(k,2), tau12(k), tau21(k), OF(k)] = NRTL(x12 in, x11 in,
parameters, T);
                       err(k,1) = abs((result(k,2) - data(k,2)) / data(k,2)) *100; % x11 error
                        err(k,2) = abs( (result(k,3) - data(k,3)) / data(k,3)) *100; % x12 error
                       x12 in = result(k,3);
                        x11 in = result(k,2);
                        fprintf(' %.2f %.4f %.4f %.4f %.4f %.4f %0.4f\n', ...
                                    T, x11 data(k), result(k,2), err(k,1), x12 data(k), result(k,3), err(k,2))
            end
            fprintf('-----
           time = toc;
           meanerr(1) = mean(err(:,1));
           meanerr(2) = mean(err(:,2));
            toterr = mean(meanerr);
           \label{eq:continuous_section} \begin{array}{lll} \text{fprintf('} & \text{x11 error } \$7.4\text{f}\n', \text{ meanerr(1))} \\ \text{fprintf('} & \text{x12 error } \$7.4\text{f}\n', \text{ meanerr(2))} \\ \text{fprintf('} & \text{overall error } \$7.4\text{f}\n', \text{ toterr)} \\ \text{fprintf('} & \text{elapsed time } \$7.4\text{f seconds}\n', \text{ time)} \end{array}
end
```

#### < HEXANE/SULFOLANE > w/ parameters from literature

\_\_\_\_\_\_ Exp NRTL NRTL Exp NRTL x11 err(%) x12 x12 x11 T/K x12 err(%) \_\_\_\_\_ 

 300.30
 0.9999
 0.9997
 0.0200
 0.0092
 0.0122
 32.6087

 307.43
 0.9995
 0.9996
 0.0070
 0.0150
 0.0140
 6.6000

 323.51
 0.9987
 0.9991
 0.0360
 0.0203
 0.0186
 8.1281

 0.9966 0.9971 0.0532 0.0276 0.0279 1.0507 348.72 363.36 0.9918 0.9948 0.2984 0.0332 0.0349 5.1205 372.41 0.9893 0.9925 0.3235 0.0432 0.0401 7.1065 0.0469 0.0436 7.0362 377.72 0.9849 0.9908 0.5970

#### < HEXANE/SULFOLANE > w/ parameters optimized

т/к	Exp x11	NRTL ×11	err(%)	Exp x12	NRTL x12	err(%)
300.30 307.43 323.51 348.72 363.36 372.41 377.72 384.43 393.92 403.51 412.29 422.92 429.93	0.9999 0.9995 0.9987 0.9966 0.9918 0.9893 0.9849 0.9842 0.9788 0.9756 0.9706 0.9681 0.9608	0.9999 0.9997 0.9988 0.9951 0.9914 0.9887 0.9870 0.9847 0.9811 0.9770 0.9724 0.9650 0.9583	0.0050 0.0190 0.0120 0.1535 0.0393 0.0586 0.2142 0.0508 0.2380 0.1404 0.1824 0.3181 0.2571	0.0092 0.0150 0.0203 0.0276 0.0332 0.0432 0.0469 0.0520 0.0584 0.0698 0.0794 0.0980 0.1161	0.0103 0.0131 0.0197 0.0302 0.0370 0.0418 0.0449 0.0493 0.0570 0.0669 0.0792 0.1004 0.1203	11.5217 12.6000 3.1527 9.3116 11.3253 3.3565 4.2857 5.0962 2.4658 4.0974 0.2519 2.4286 3.6090

x11 error 0.1299 x12 error 5.6540 overall error 2.8920 elapsed time 2.1997 seconds

#### **Function**

```
function [x12_cal, x11_cal, tau12, tau21, minOF2] = NRTL(x12_in,x11_in,parameters, T)
alpha = 0.3;
a12 = parameters(1);
b12 = parameters(2);
c12 = parameters(3);
d12 = parameters(4);
a21 = parameters(5);
b21 = parameters(6);
c21 = parameters(7);
d21 = parameters(8);
tau12 = a12 + b12/T + c12*log(T) + d12*T;
tau21 = a21 + b21/T + c21*log(T) + d21*T;
G12 = \exp(-alpha*tau12);
G21 = exp(-alpha*tau21);
n = 10*10^4;
x12 = zeros(n, 1);
x11 = zeros(n,1);
% OF = zeros(n/2);
stop_i = 0;
stop_j = 0;
for i = 1:n
    x12(i) = x12 in + (i-1)/n;
for j = 1:n
```

```
if stop_j ==1
           stop_j = 0;
           break
        end
        x11(j) = x11 in - (j-1)/n;
       % alpha phase (rich in 2)
       x1 = x12(i);
       x2 = 1 - x1;
       gamma11 = exp(x2^2 * (tau21*(G21/(x1+x2*G21))^2 + G12*tau12/
(x2+x1*G12)^2);
       gamma21 = exp(x1^2 * (tau12*(G12/(x2+x1*G12))^2 + G21*tau21/
(x1+x2*G21)^2);
        k11 = x1*gamma11;
        k21 = x2*gamma21;
        % beta phase (rich in 1)
        x1 = x11(j);
       x2 = 1 - x1;
        gamma12 = exp(x2^2 * (tau21*(G21/(x1+x2*G21))^2 + G12*tau12 /
(x2+x1*G12)^2);
       gamma22 = exp(x1^2 * (tau12*(G12/(x2+x1*G12))^2 + G21*tau21/
(x1+x2*G21)^2);
        k12 = x1*gamma12;
        k22 = x2*gamma22;
       OF(i,j) = (k11 - k12)^2 + (k21 - k22)^2;
        if j>2
            if OF(i,j) > OF(i,j-1)
                minOF(i) = OF(i,j-1);
               min_j = j-1;
                stop_j = 1;
           end
       end
   end
     fprintf('\n%f', min(OF(i)));
    if i> 2
       if minOF(i) > minOF(i-1)
           min = minOF(i-1);
min_i = i-1;
            stop_i = 1;
        end
   end
    if stop i == 1
       break
end
minOF2 = min;
x11_cal = x11(min_j);
x12_cal = x12(min_i);
end
```