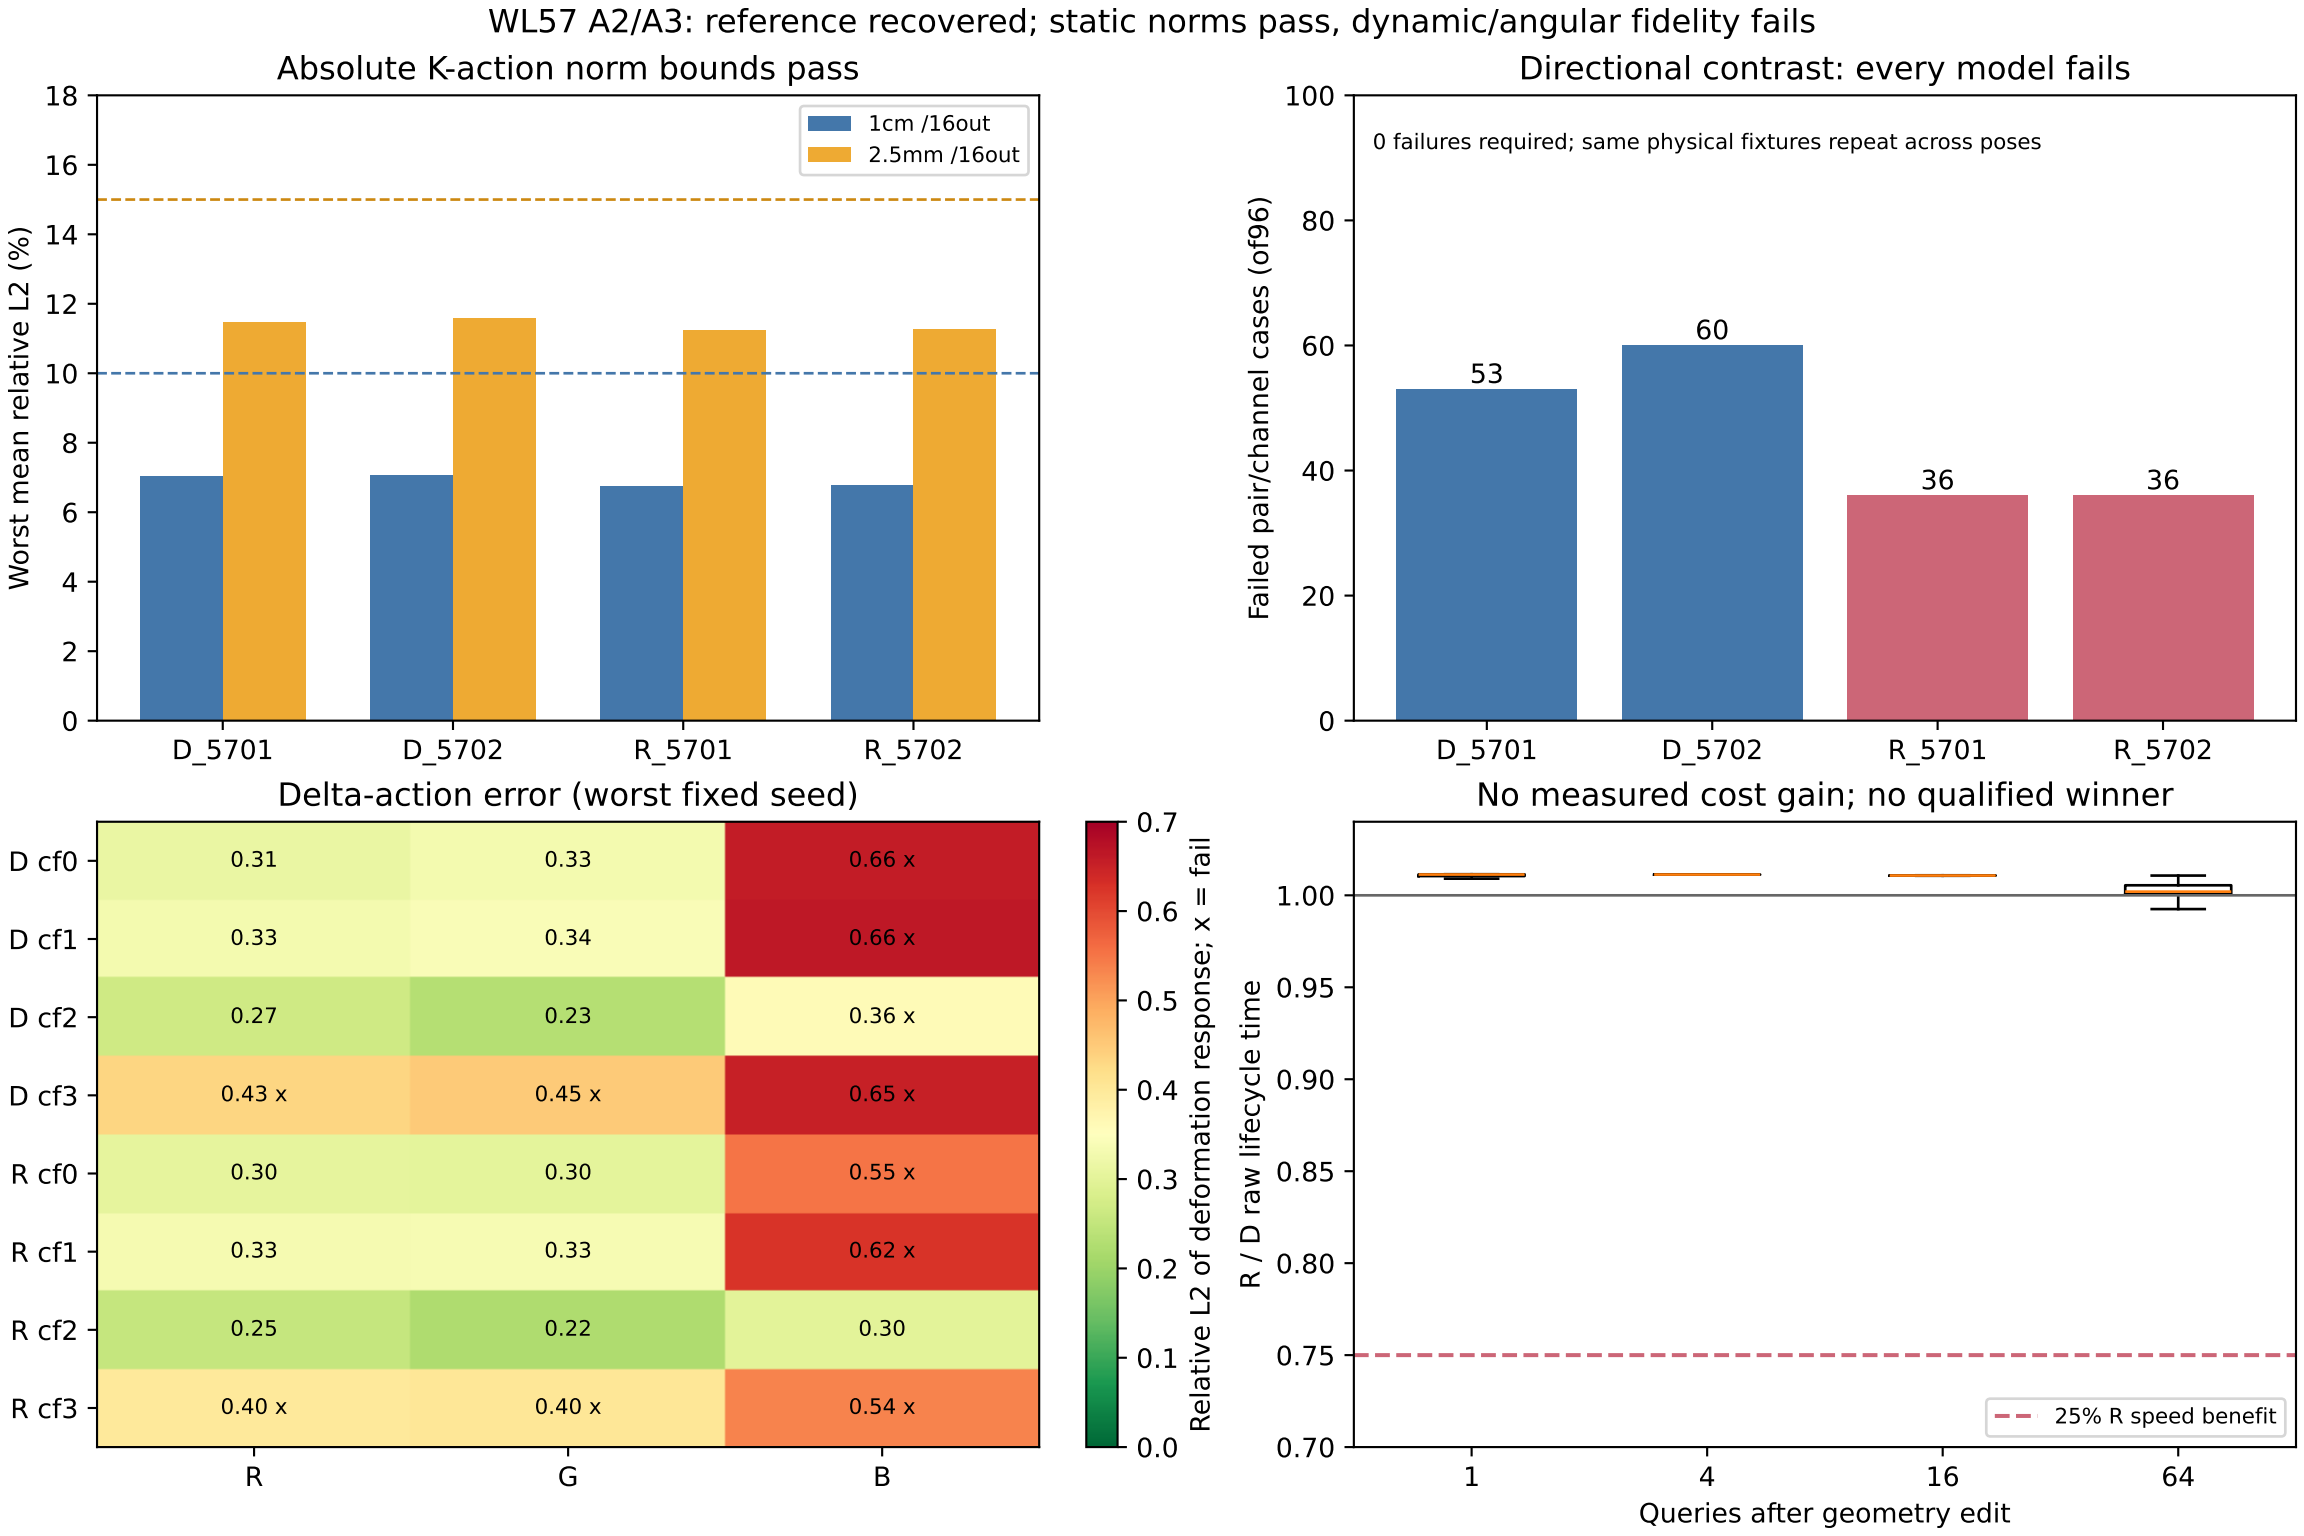
WL57 A2/A3: reference recovered; static norms pass, dynamic/angular fidelity fails
Absolute K-action norm bounds pass
Worst mean relative L2 (%)
1cm /16out
2.5mm /16out
D_5701
D_5702
R_5701
R_5702
Directional contrast: every model fails
0 failures required; same physical fixtures repeat across poses
Failed pair/channel cases (of96)
53
60
36
36
Delta-action error (worst fixed seed)
D cf0
D cf1
D cf2
D cf3
R cf0
R cf1
R cf2
R cf3
0.31
0.33
0.66 x
0.33
0.34
0.66 x
0.27
0.23
0.36 x
0.43 x
0.45 x
0.65 x
0.30
0.30
0.55 x
0.33
0.33
0.62 x
0.25
0.22
0.30
0.40 x
0.40 x
0.54 x
R
G
B
Relative L2 of deformation response; x = fail
No measured cost gain; no qualified winner
R / D raw lifecycle time
25% R speed benefit
Queries after geometry edit