
Field-voltage monitor: U18 / R80-R83




Unmodified native schematic region; complete sheet follows. Named nets continue elsewhere.


Pulse permission and direct hardware clear: U11 / U41

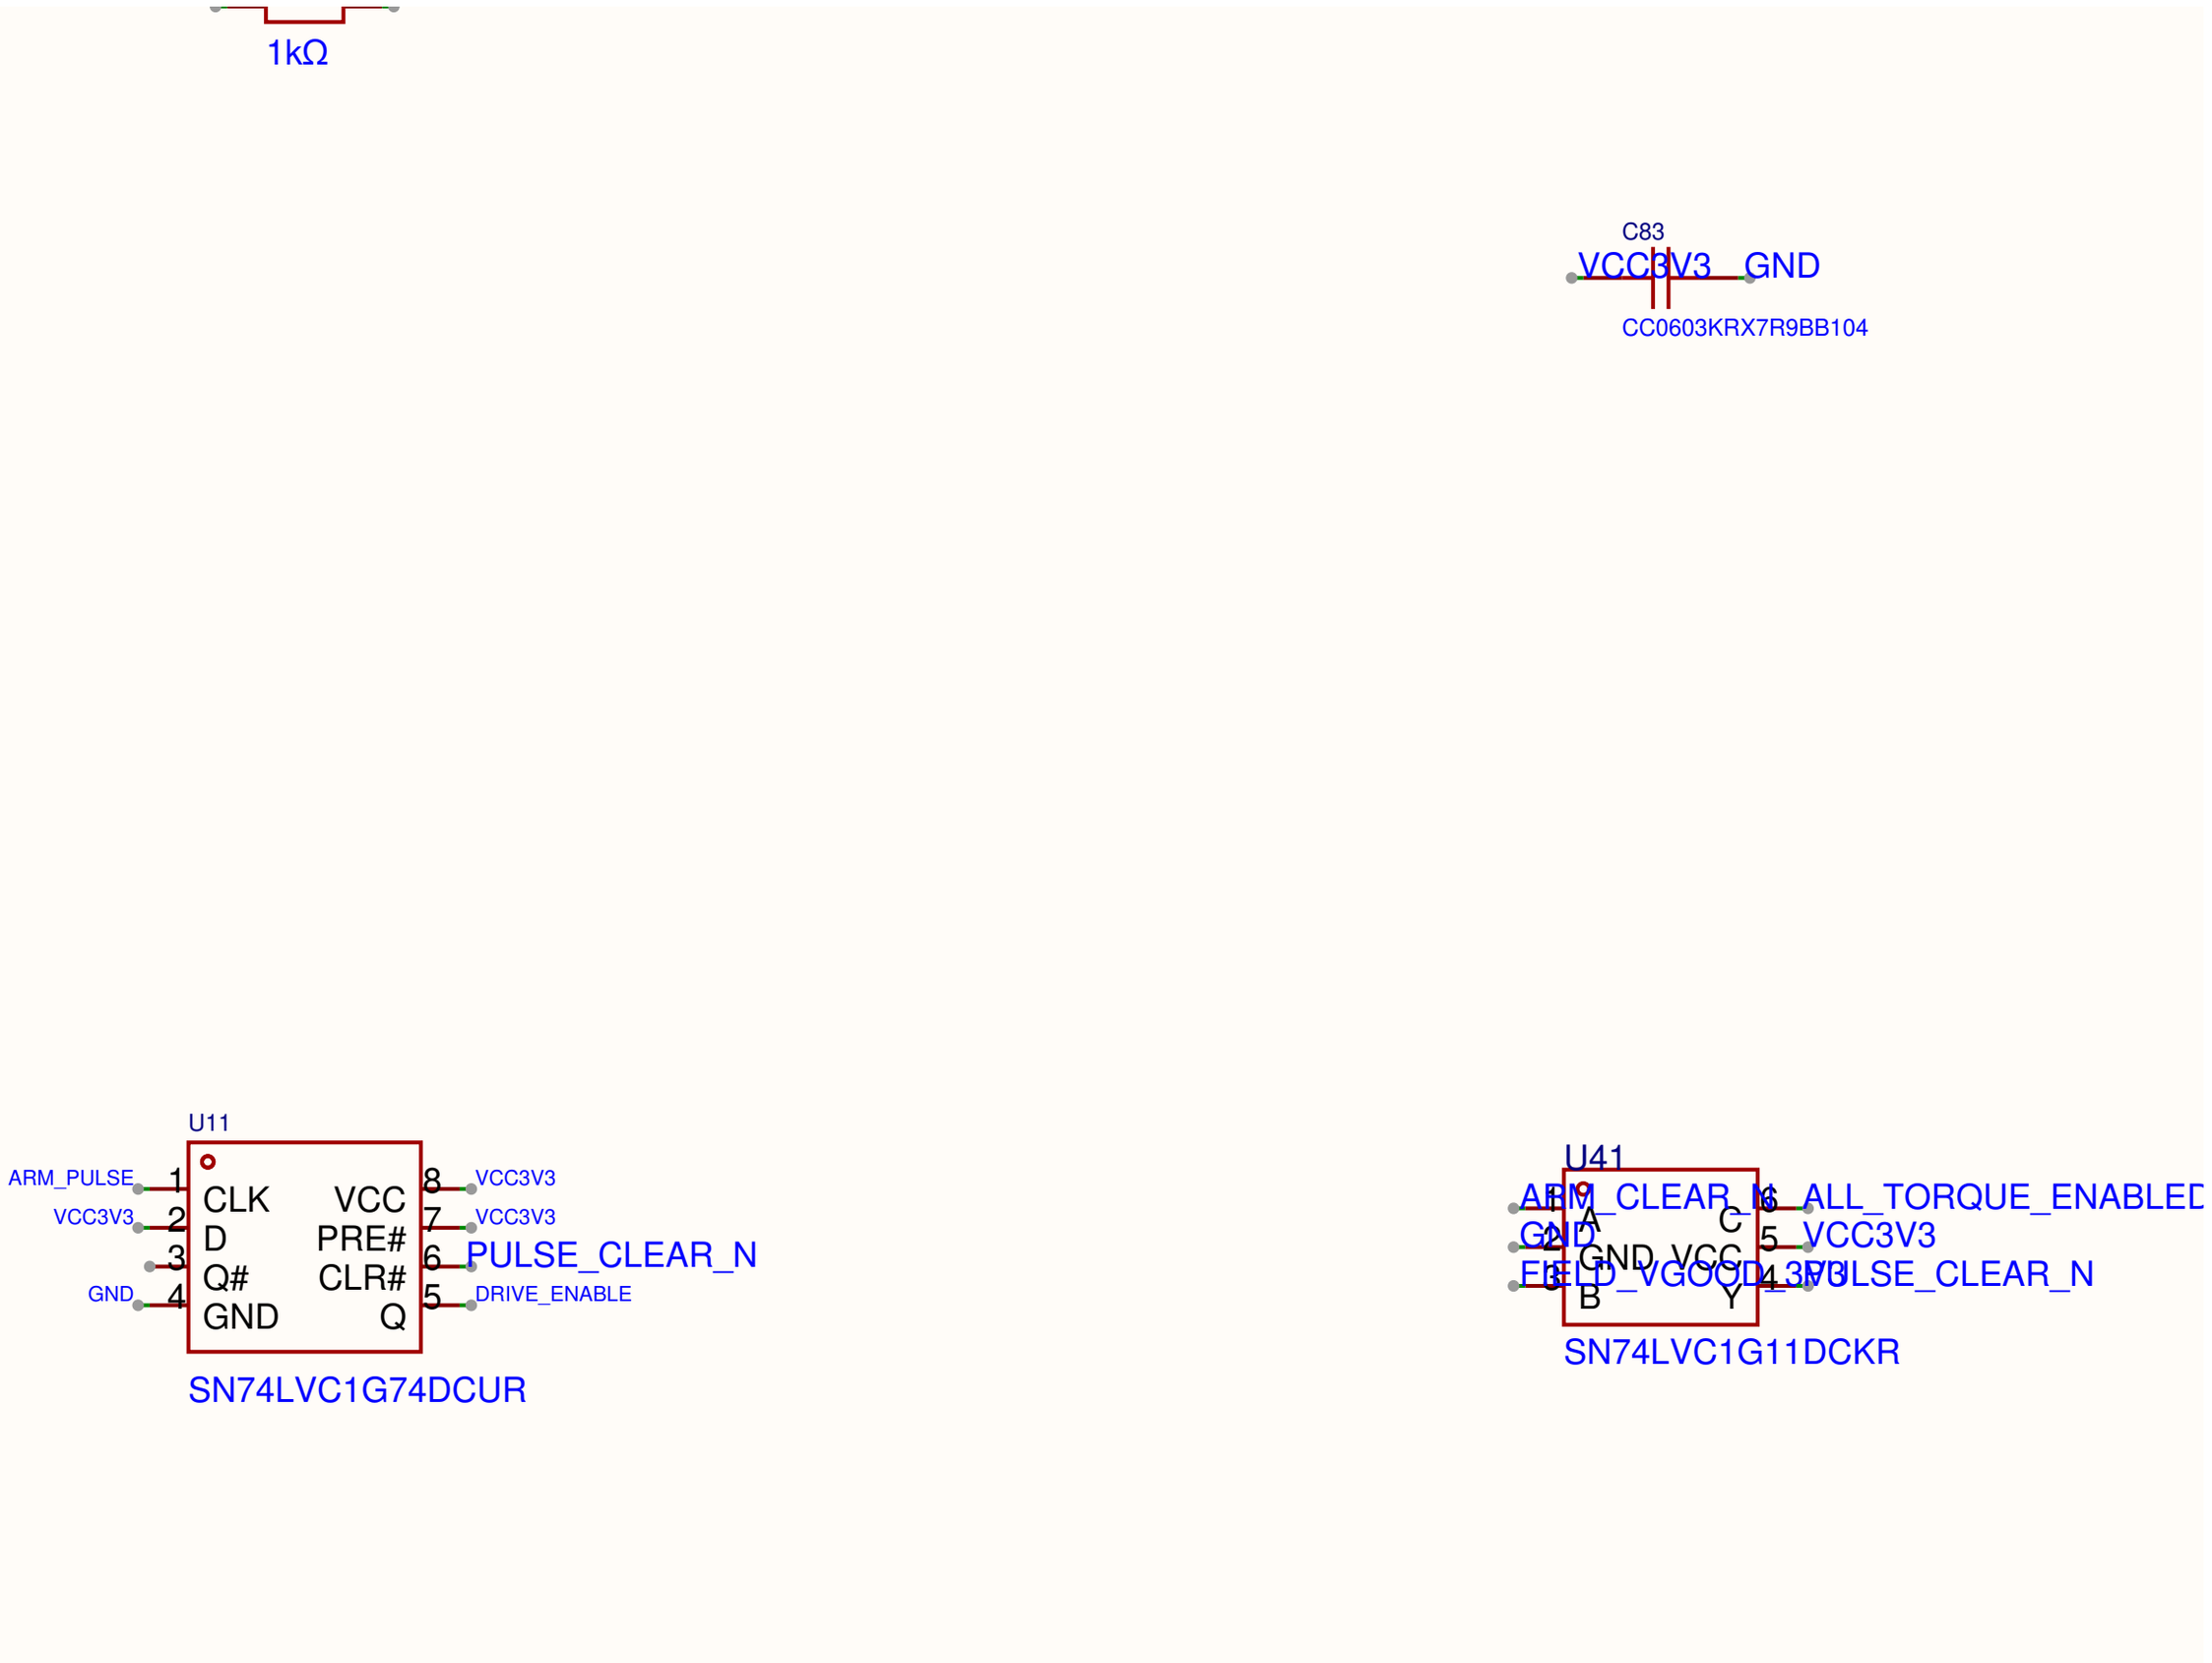



Unmodified native schematic region; complete sheet follows. Named nets continue elsewhere.

Input ideal-diode bypass: U42 / Q11






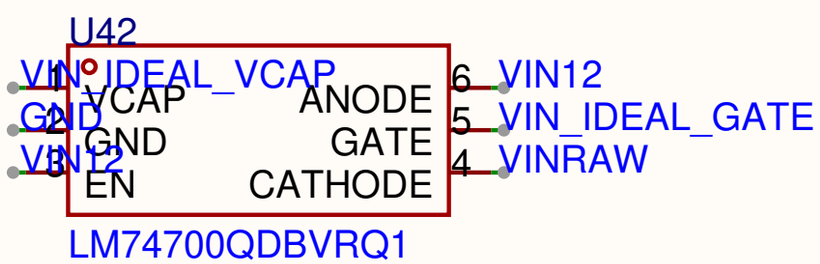

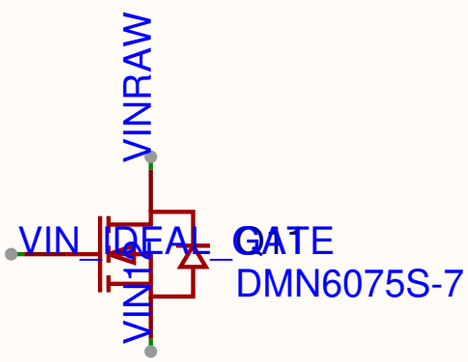

Unmodified native schematic region; complete sheet follows. Named nets continue elsewhere.

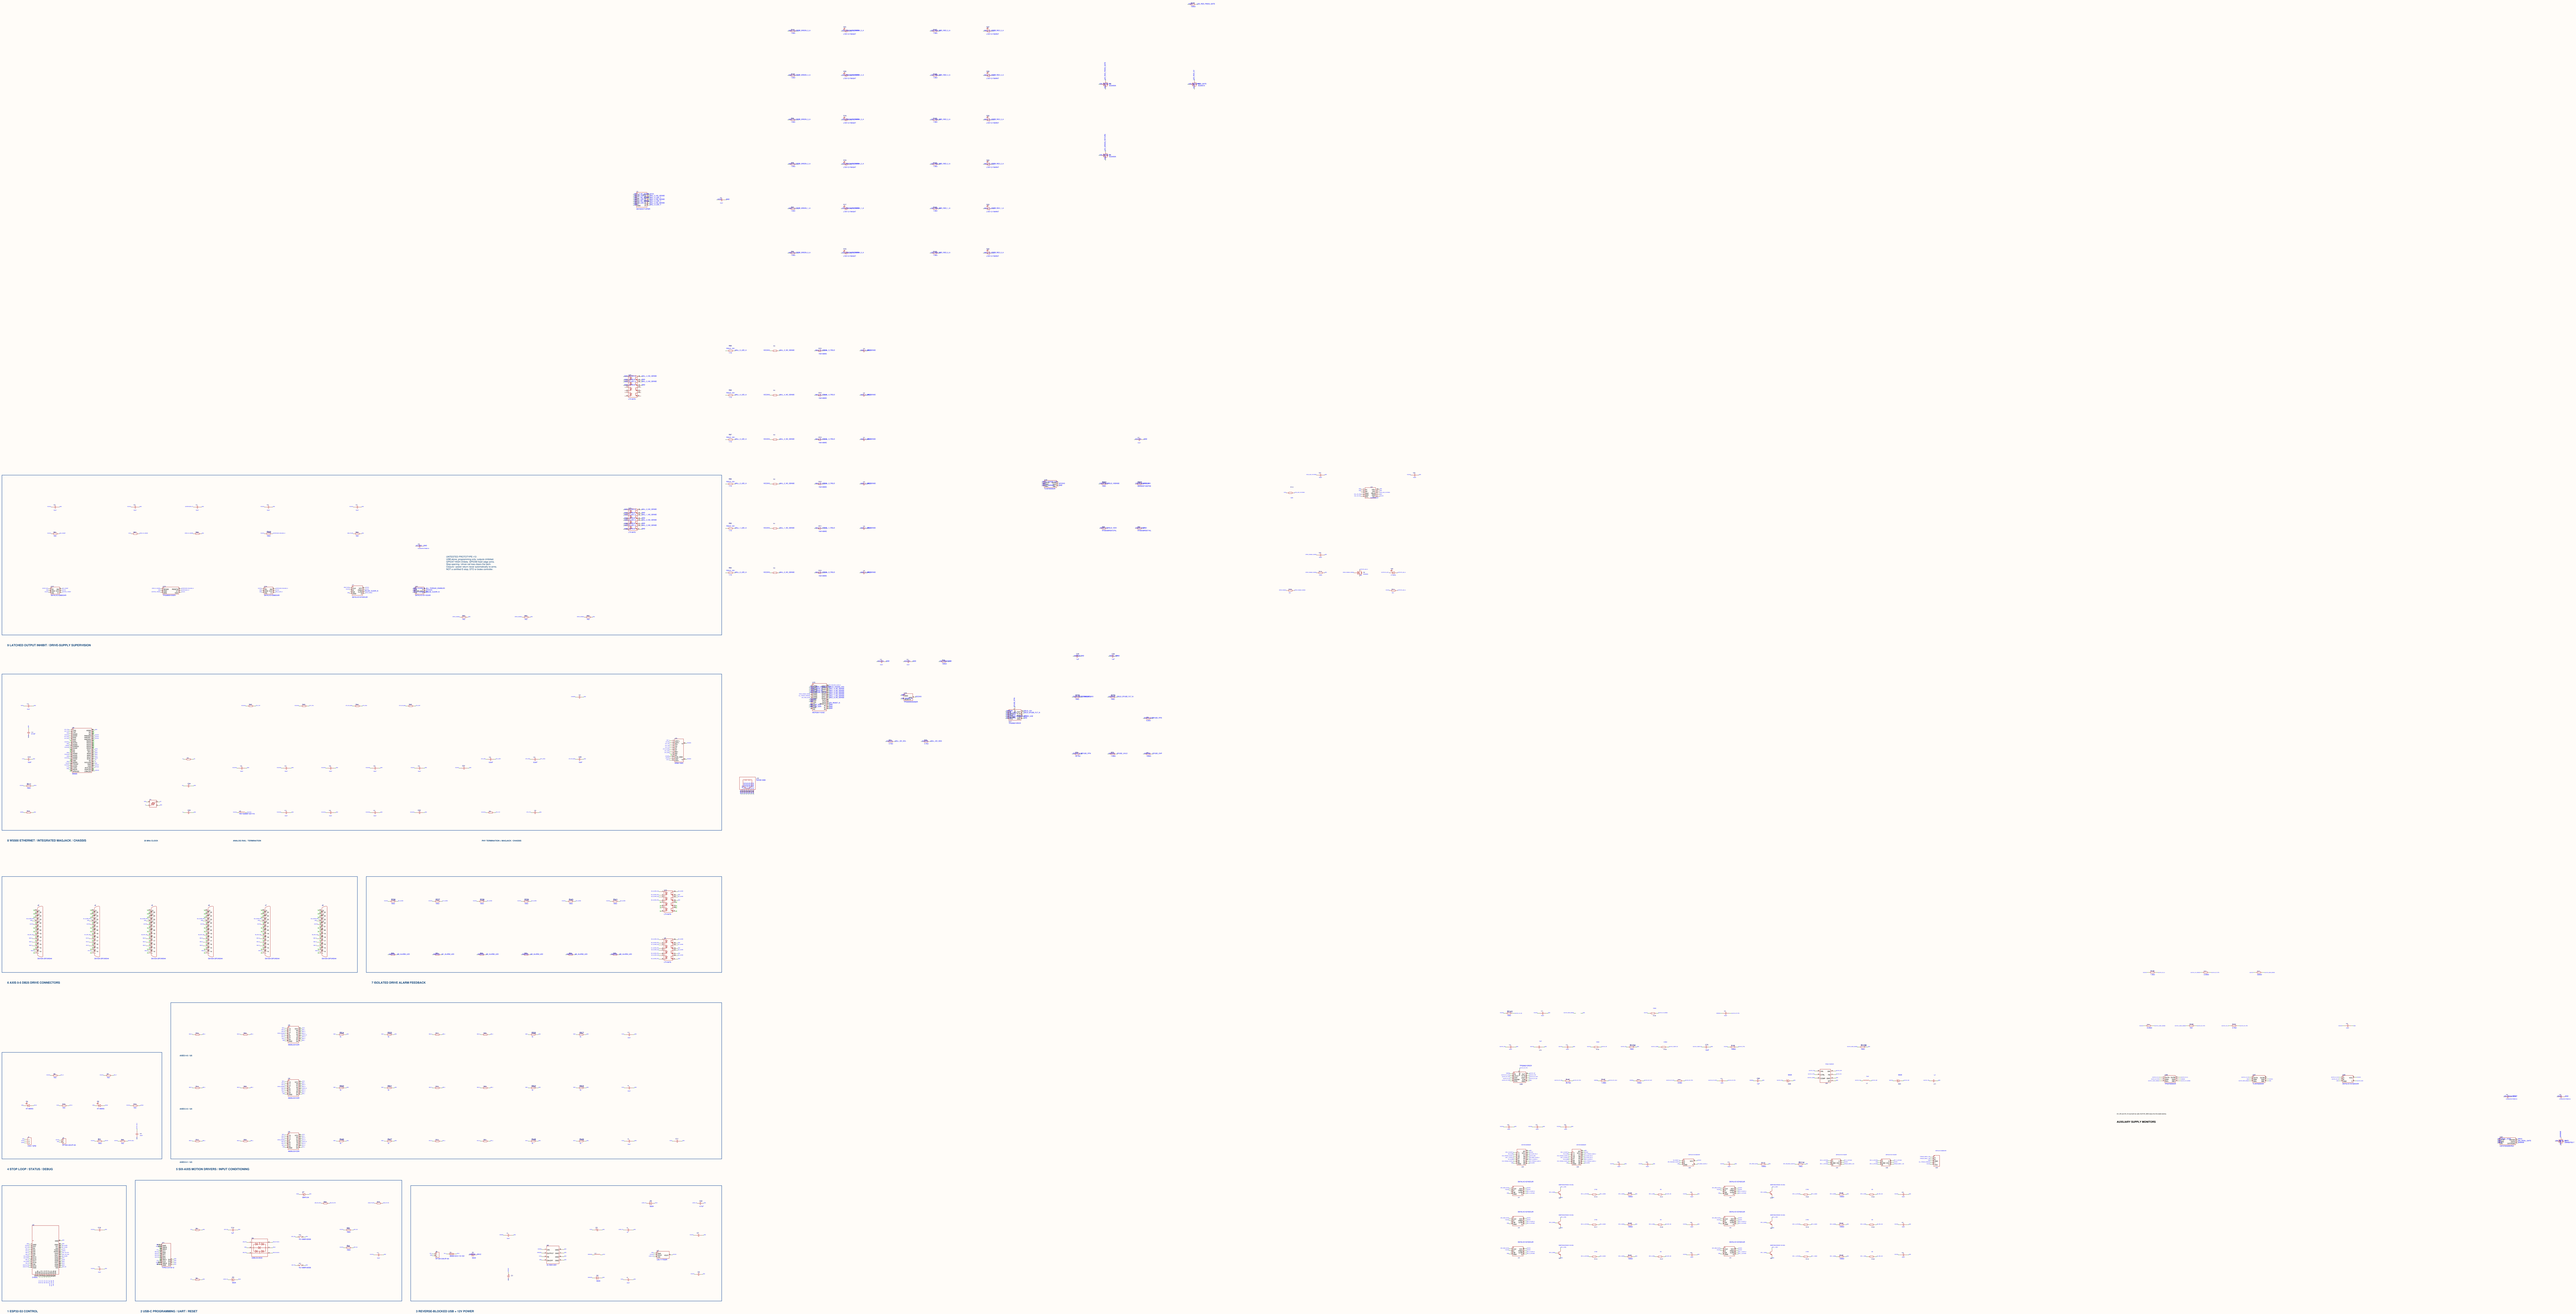
11 LATCHED OUTPUT MAINT / DRIVE-SUPPLY SUPERVISION
8 RIGGS ETHERNET - INTEGRATED MAILBACK - CHASSIS
9 AXIS 0-5 DB25 DRIVE CONNECTORS
7 ISOLATED DRIVE ALARM FEEDBACK
4 PTAP LOOP - STATUS - DEBUG
5 SIX-AXIS MOTION DRIVERS - INPUT CONDITIONING
TAP PCI-SIO CONTROL
2 USB-C PROGRAMMING - UART - RESET
3 REVERSE-BLOCKED USB + 5V POWER
AUXILIARY SUPPLY MONITORS