
Measurement: Impedance Adapter



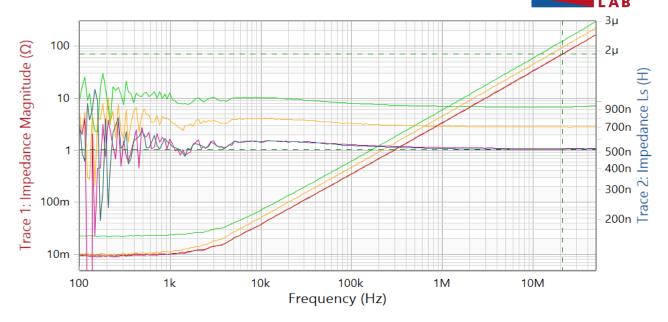

Sweep	
Start frequency:	100 Hz
Stop frequency:	50 MHz
Center frequency:	25 MHz
Span:	50 MHz
Sweep mode:	Logarithmic
Numer of points:	201

Hardware setup	
Device type:	Bode100R2
Serial number:	QH762K
Receiver bandwidth:	300 Hz
Output level:	13 dBm
DUT settling time:	0 ms

Calibration	Full-Range	User-Range
Impedance	Active	-