
Leading provider of one-stop network security and industrial control solutions

Motherboard core features:

- Supports Intel 12th/13th/14th generation desktop processors TDP65W peak 125W
- 17*17ITX board type compatible with LGA115X/1700 series CPU cooler
- 1 PCIE x16 slot PCIE5.0 x16 signal can be split into 8+8 via jumper cap
- 2 SFF-8643 can be expanded to 8 SATA
- 1 M.2 PCIe4.0 x4 2280/22110 on the front 2 M.2 PCIe4.0 x4 2280 on the back
- Dual-channel desktop memory slot U-DIMM DDR5 supports 5600MHz backward compatibility by default
- 1 Intel i226-LM 2.5G RJ45 network port supports Intel vPro remote management function
- 1 Intel i226-V 2.5G RJ45 network port
- HDMI+DP dual display output supports 4K@60Hz
- 1 Type-C interface with a rate of 20Gbps, does not support power supply and display
- 4 USB ports: 3 USB3.2, 2 USB2.0
- Built-in 1 USB3.0 female socket, supports wiring to the panel
- Built-in 1 Type-E female connector, supports connecting to the panel
- Built-in 1 USB2.0 port to support U disk encryption and other applications and some system boot

Internal Part Number: **CW-Q670-Plus**

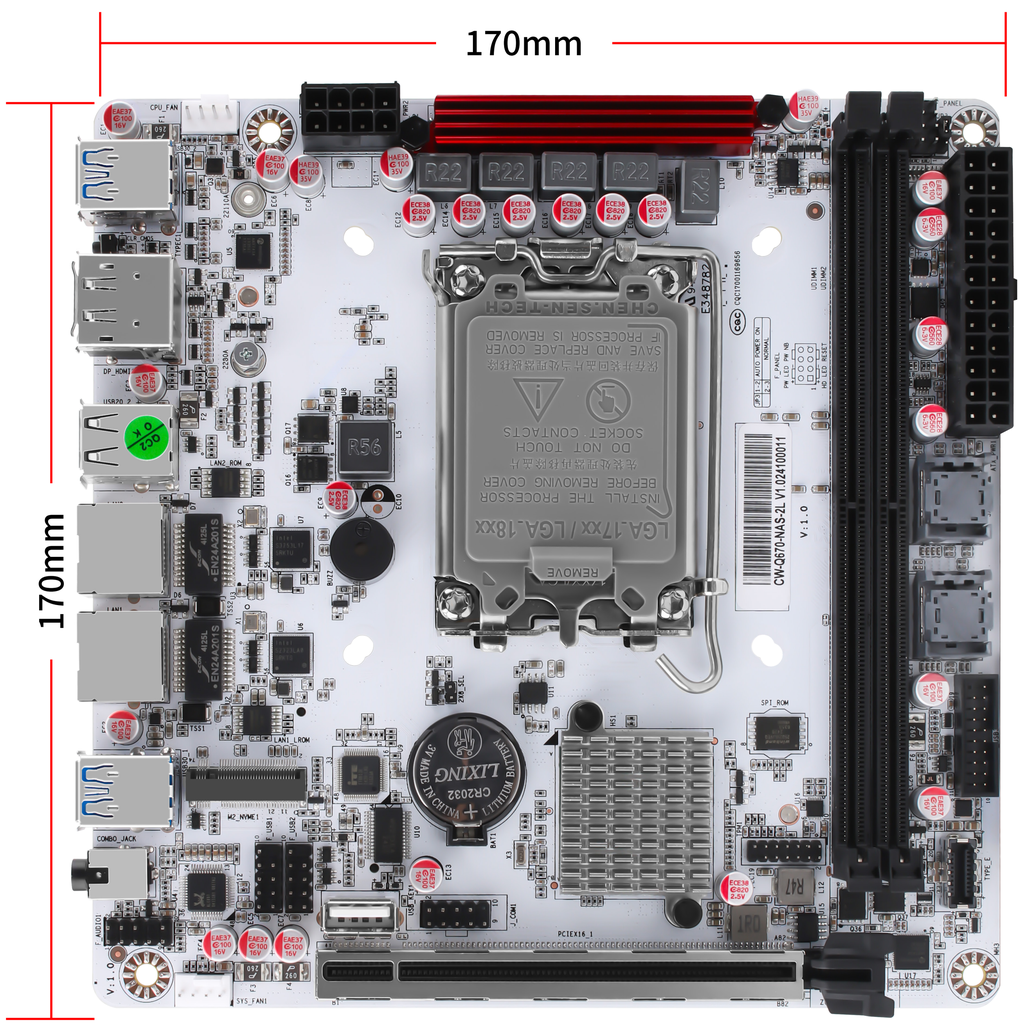

intel | PCI-E x16 | 2500 Giga LAN | DDR5 双通道 | USB 3.2 | HDMI 2.0 | DP 1.4 | SFF-8643 2个 | LAG1700 115X散热器 | Type-C USB4


Specifications:


Specification	
Motherboard Features	- Off-white PCB - Full protection (supports all USB, audio, and network interfaces) - PCIe Fast Split
processor	- Support Intel 12th/13th/14th generation LGA1700 desktop processors - Note: vPro function requires i5-1X500 or above processor to use, F series does not support it, it needs integrated graphics to support it - Note: 125W TDP processors are supported by default, and K series processors are not recommended - Note: It is recommended to use a processor with T such as 13500T, which is low in power consumption and suitable for long-term use.
Memory	- Supports U-DIMM DDR5 memory technology for desktops. Does not support ECC - 2 * U-DIMM DDR5 dual channel memory slots - DDR5 supports 5600MHz by default (Note: 12th generation processors only support 4800MHz) - Maximum capacity of a single memory stick is 48GB Maximum capacity of two memory sticks is 96GB
TDP	- Basic power consumption (65W)
store	- 3 * M.2 NVMe PCIe4.0 x4 signal (front compatible size 2280/22110, back 2280) - 2 * SFF-8643 sockets natively support 8 SATA3.0
Network Card	- 1 * Intel i226-V 2.5G RJ45 electrical port - 1 * Intel i226-LM 2.5G RJ45 electrical port (supports vPro) remote management function
Graphics	- CPU determines integrated graphics - x16 slot supports various PCI-E graphics cards/network cards - HDMI2.0 interface supports 4K 4096x2160 @ 60Hz - DP1.4 interface supports 4K 4096X2160 @ 60Hz
structure	- ITX form factor: 6.7-in * 6.7-in, 170mm * 170mm - Solid state capacitor design
operating system	- Supports Microsoft® Windows 10/11 64-bit - Linux compatible - Only supports EFI mode
Motherboard size	170mm（W）X 170mm（L）

Specification	
Onboard Interface	- 1 * CPU-FAN fan connector - 1 * SYS-FAN fan connector - 1 * 8-pin ATX power connector - 1 *2 4-pin ATX power connector - 3 *M.2 NVMe PCIe4.0 x4 2280 and 22110 specifications - 2 * SFF-8643 is SATA signal - 2 * U-DIMM DDR5 memory slots - 1 * PCIE x16 slot - 1 * USB2.0 (vertical, can be plugged into USB dongle, etc.) - 1 * TPM pin header - L * COM pin header - 2 * USB2.0 pin headers - 1 * AUDIO pin header
IO interface	- 1 * HDMI 2.0 - 1 * Clear BIOS button - 1 * Type-C (USB3.2 20Gbps rate) - 1 * DP1.4 - 2 * 2.5G network ports - 3 * USB 3.2 - 1 * 2 in 1 audio interface

Network security industrial computer source factory

Product model: CW-Q670-Plus

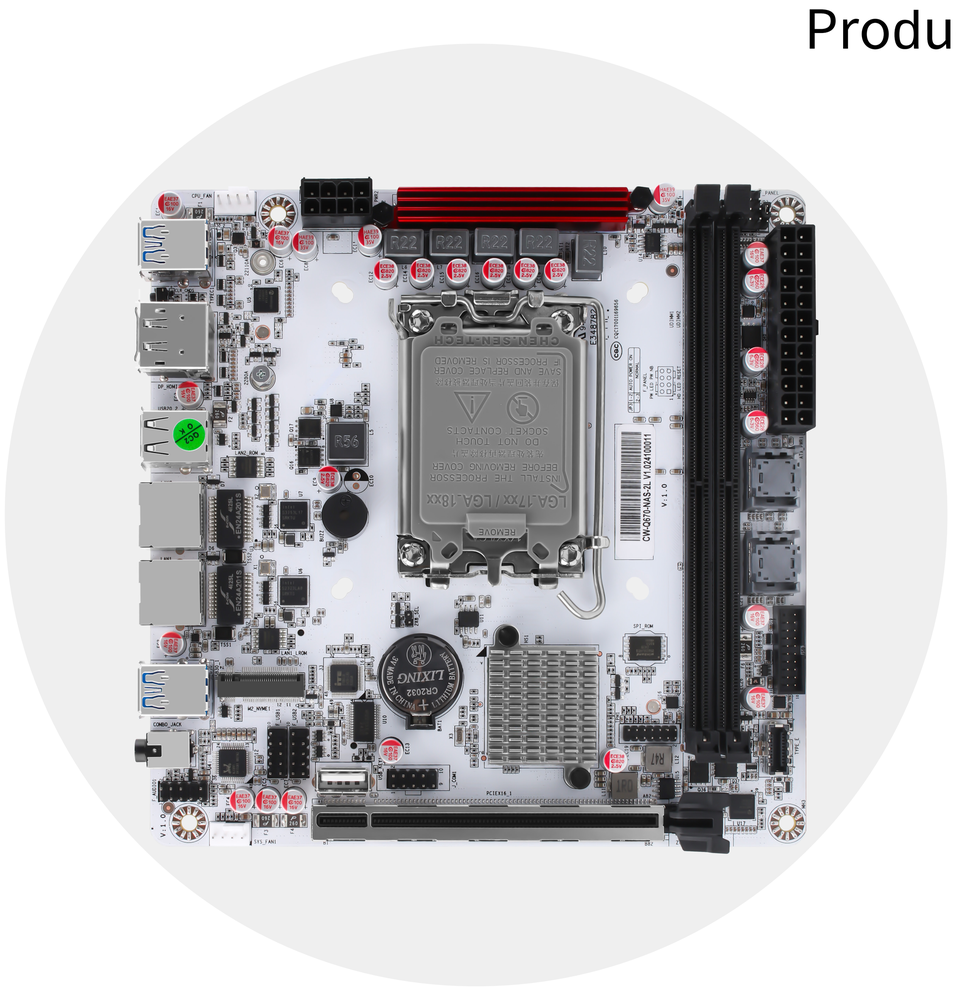

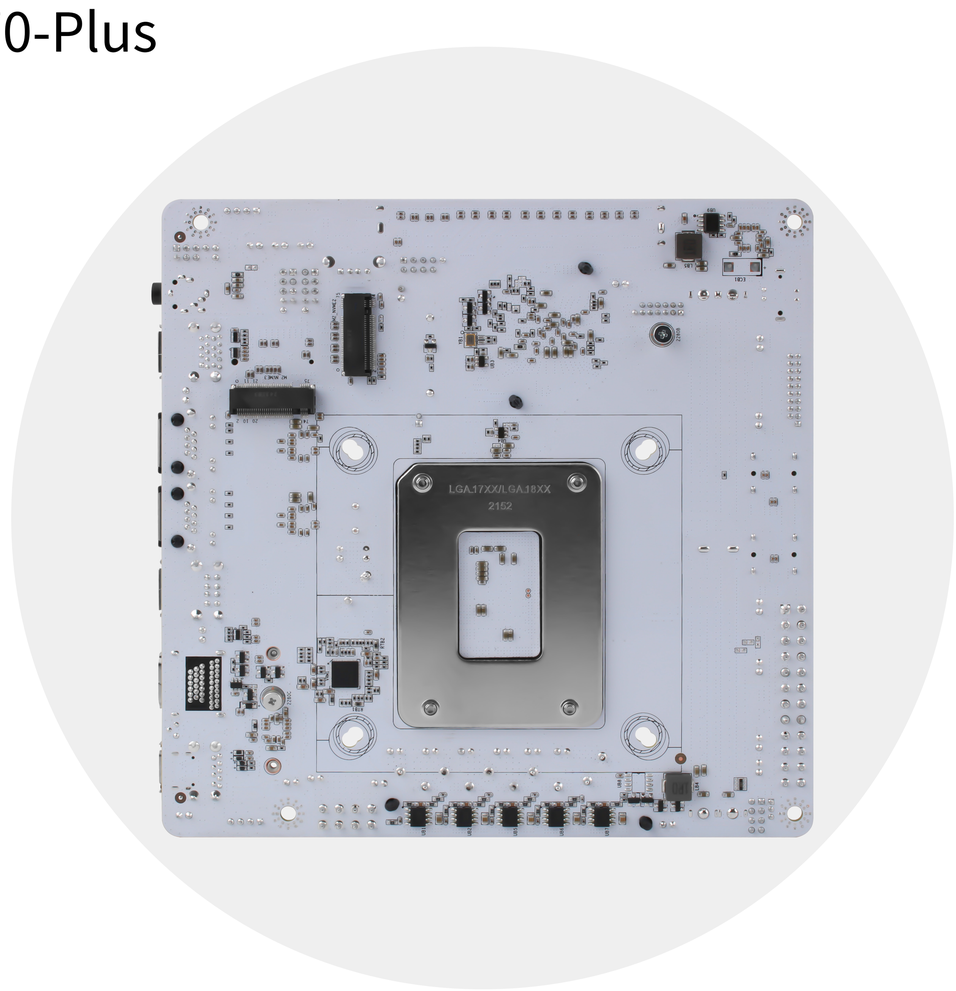

Interface Introduction

