CMOS LDO Regulator Series for Portable Equipments

# Versatile Package
# FULL CMOS LDO Regulator

## BUxxTD2WNVX series

### ●General Description

BUxxTD2WNVX series is high-performance FULL CMOS regulator with 200-mA output, which is mounted on versatile package SSON004X1010 (1.00mm × 1.00 mm × 0.60mm). It has excellent noise characteristics and load responsiveness characteristics despite its low circuit current consumption of 35μA. It is most appropriate for various applications such as power supplies for logic IC, RF, and camera modules.ROHM's.

### ●Features

- High accuracy detection
- low current consumption
- Compatible with small ceramic capacitor(Cin=Co=0.47uF)
- With built-in output discharge circuit
- High ripple rejection
- ON/OFF control of output voltage
- With built-in over current protection circuit and thermal shutdown circuit
- Low dropout voltage

### ●Key Specifications

- Output voltage: 1.0V to 3.4V
- Accuracy output voltage: ±1.0% (±25mV)
- Low current consumption: 35μA
- Operating temperature range: -40°C to +85°C

### ●Applications

Battery-powered portable equipment, etc.

### ●Package

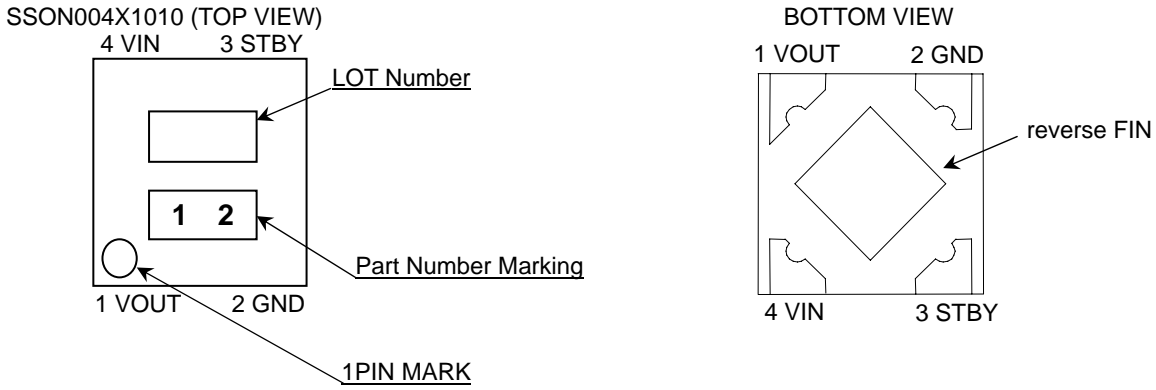SSON004X1010 : 1.00mm x 1.00mm x 0.60mm

### ●Typical Application Circuit



Fig.1 Application Circuit

○Product structure:Silicon monolithic integrated circuit    ○This product is not designed protection against radioactive rays.

www.rohm.com
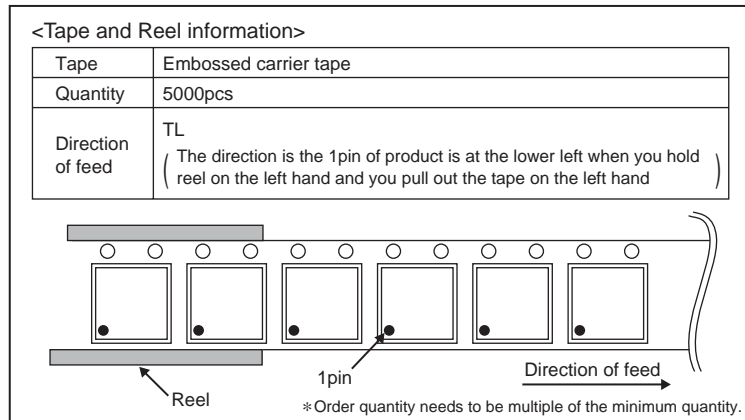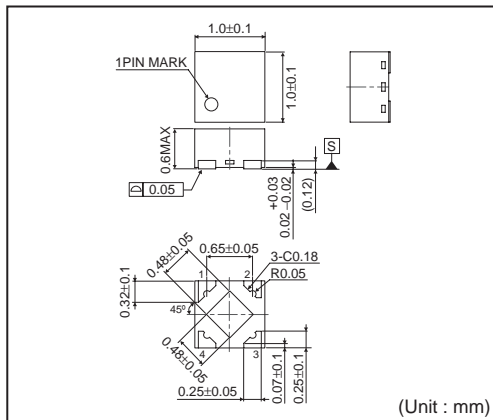TSZ22111·14·001
© 2013 ROHM Co., Ltd. All rights reserved.
1/40
**TSZ02201-0RBR0A300050-1-2**
**14.Jan.2013.Rev.008**

●**Connection Diagram**

SSON004X1010 (TOP VIEW)



BOTTOM VIEW



●**Pin Descriptions**

| SSON004X1010 | | |
|---|---|---|
| PIN No. | Symbol | Function |
| 1 | VOUT | Output Voltage |
| 2 | GND | Grouding |
| 3 | STBY | ON/OFF control of output voltage (High: ON, Low: OFF) |
| 4 | VIN | Power Supply Voltage |
| reverse | FIN | Substrate (Connect to GND) |

●**Ordering Information**

| B | U | x | x | T | D | 2 | W | N | V | X | – | T | L |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|

Part Number

Output Voltage
10 : 1.0V
⇩
34 : 3.4V

Low Dropout Voltage
Maximum Output Current
200mA

with output discharge

Package
NVX : SSON004X1010

Packageing and forming specification
Embossed tape and reel
TL :  The pin number 1 is the lower left

**SSON004X1010**



(Unit : mm)

<Tape and Reel information>

| Tape | Embossed carrier tape |
|---|---|
| Quantity | 5000pcs |
| Direction of feed | TL ( The direction is the 1pin of product is at the lower left when you hold reel on the left hand and you pull out the tape on the left hand ) |



1pin

Direction of feed

Reel

∗Order quantity needs to be multiple of the minimum quantity.

●**Lineup**

| Marking | A | 6 | 5 | 2 | B | 3 | 5i | C | D |
|---|---|---|---|---|---|---|---|---|---|
| Output Voltage | 1.0V | 1.05V | 1.1V | 1.15V | 1.2V | 1.25V | 1.3V | 1.5V | 1.8V |
| Part Number | BU10 | BU1A | BU11 | BU1B | BU12 | BU1C | BU13 | BU15 | BU18 |

| E | F | G | r | 0 | 1 | H | J | K |
|---|---|---|---|---|---|---|---|---|
| 1.85V | 1.9V | 2.0V | 2.05V | 2.1V | 2.3V | 2.5V | 2.6V | 2.7V |
| BU1J | BU19 | BU20 | BU2A | BU21 | BU23 | BU25 | BU26 | BU27 |

| a | L | M | N | P | Q | R | U | Y |
|---|---|---|---|---|---|---|---|---|
| 2.75V | 2.8V | 2.85V | 2.9V | 3.0V | 3.1V | 3.2V | 3.3V | 3.4V |
| BU2H | BU28 | BU2J | BU29 | BU30 | BU31 | BU32 | BU33 | BU34 |

●**Absolute Maximum Ratings (Ta=25°C)**

| PARAMETER | Symbol | Limit | Unit |
|---|---|---|---|
| Power Supply Voltage | VMAX | -0.3 ～ +6.5 | V |
| Power Dissipation | Pd | 560(*1) | mW |
| Maximum junction temperature | TjMAX | +125 | ℃ |
| Operating Temperature Range | Topr | -40 ～ +85 | ℃ |
| Storage Temperature Range | Tstg | -55 ～ +125 | ℃ |

(∗1)Pd deleted at 5.6mW/℃ at temperatures above Ta=25℃, mounted on 70×70×1.6 mm glass-epoxy PCB.

● **RECOMMENDED OPERATING RANGE (not to exceed Pd)**

| PARAMETER | Symbol | Limit | Unit |
|---|---|---|---|
| Power Supply Voltage | VIN | 1.7~6.0 | V |
| Maximum Output Current | IMAX | 200 | mA |

●OPERATING CONDITIONS

| PARAMETER | Symbol | MIN. | TYP. | MAX. | Unit | CONDITION |
|---|---|---|---|---|---|---|
| Input Capacitor | Cin | 0.22(∗2) | 0.47 | – | μF | Ceramic capacitor recommended |
| Output Capacitor | Co | 0.22(∗2) | 0.47 | – | μF | |

(∗2)Make sure that the output capacitor value is not kept lower than this specified level across a variety of temperature, DC bias, changing as time progresses characteristic.

●**Electrical Characteristics**
(Ta=25℃, VIN=VOUT+1.0V (*3), STBY=VIN, Cin=0.47μF, Co=0.47μF, unless otherwise noted.)

| PARAMETER | Symbol | Limit | | | Unit | Conditions |
|---|---|---|---|---|---|---|
| | | MIN. | TYP. | MAX. | | |
| **Overall Device** | | | | | | |
| Output Voltage | VOUT | VOUT×0.99 | VOUT | VOUT×1.01 | V | IOUT=10μA, VOUT≧2.5V |
| | | VOUT−25mV | | VOUT+25mV | | IOUT=10μA, VOUT＜2.5V |
| Operating Current | IIN | – | 35 | 60 | μA | IOUT=0mA |
| Operating Current (STBY) | ISTBY | – | – | 1.0 | μA | STBY=0V |
| Ripple Rejection Ratio | RR | 45 | 70 | – | dB | VRR=−20dBv, fRR=1kHz, IOUT=10mA |
| Dropout Voltage | VSAT | – | 800 | 1100 | mV | 1.0V≦VOUT＜1.2V(IOUT=200mA) |
| | | – | 600 | 900 | mV | 1.2V≦VOUT＜1.5V(IOUT=200mA) |
| | | – | 440 | 700 | mV | 1.5V≦VOUT＜1.8V(IOUT=200mA) |
| | | – | 380 | 600 | mV | 1.8V≦VOUT＜2.5V(IOUT=200mA) |
| | | – | 280 | 540 | mV | 2.5V≦VOUT≦2.6V(IOUT=200mA) |
| | | – | 260 | 500 | mV | 2.7V≦VOUT≦2.85V(IOUT=200mA) |
| | | – | 240 | 460 | mV | 2.9V≦VOUT≦3.1V(IOUT=200mA) |
| | | – | 220 | 420 | mV | 3.2V≦VOUT≦3.4V(IOUT=200mA) |
| Line Regulation | VDL | – | 2 | 20 | mV | VIN=VOUT+1.0V to 5.5V (*4), IOUT=10μA |
| Load Regulation | VDLO | – | 10 | 80 | mV | IOUT=0.01mA to 100mA |
| **Over Current Protection (OCP)** | | | | | | |
| Limit Current | ILMAX | 220 | 400 | 700 | mA | Vo=VOUT*0.95 |
| Short Current | ISHORT | 20 | 70 | 150 | mA | Vo=0V |
| **Standby Block** | | | | | | |
| Discharge Resistor | RDSC | 20 | 50 | 80 | Ω | VIN=4.0V, STBY=0V, VOUT=4.0V |
| STBY Pin Pull−down Current | ISTB | 0.1 | 0.6 | 2.0 | μA | STBY=1.5V |
| STBY Control Voltage ON | VSTBH | 1.2 | – | 6.0 | V | |
| STBY Control Voltage OFF | VSTBL | −0.3 | – | 0.3 | V | |

This product is not designed for protection against radioactive rays.
(*3) VIN=2.5V for VOUT≦1.5V
(*4) VIN=2.5V to 3.6V for VOUT≦1.5V

●**Block Diagrams**



Cin･･･0.47μF (Ceramic)
Co ･･･0.47μF (Ceramic)
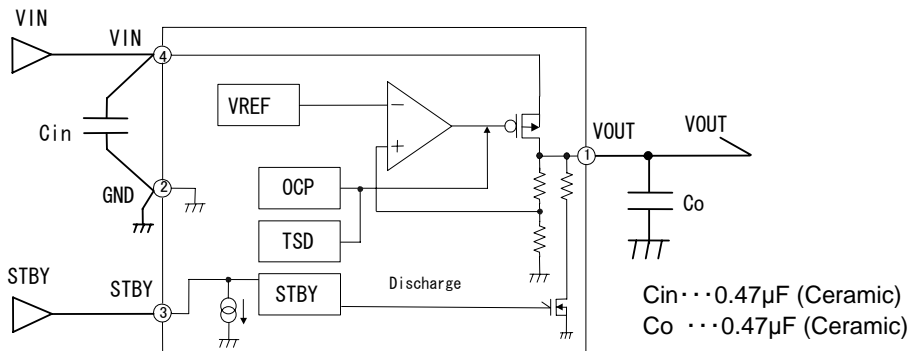
Fig. 2   Block Diagrams

●Reference data   BU12TD2WNVX    (Ta=25ºC unless otherwise specified.)
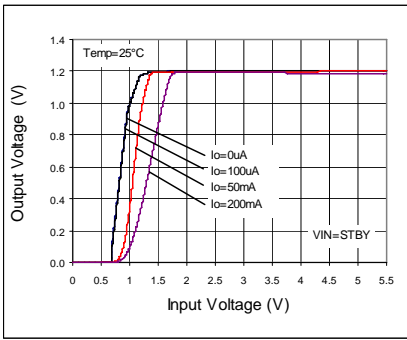


**Fig 3. Output Voltage**
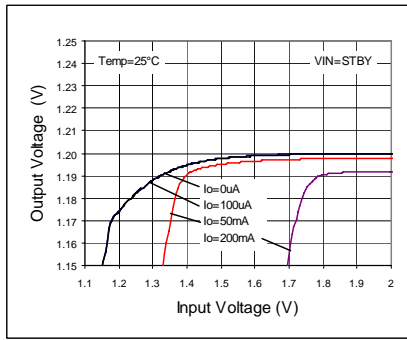


**Fig 4. Line Regulation**
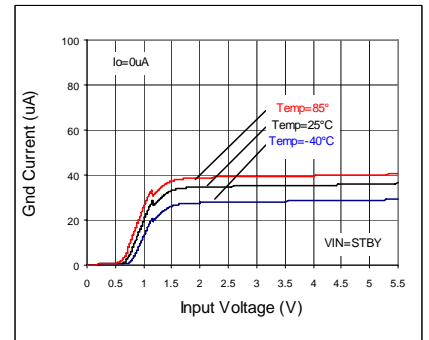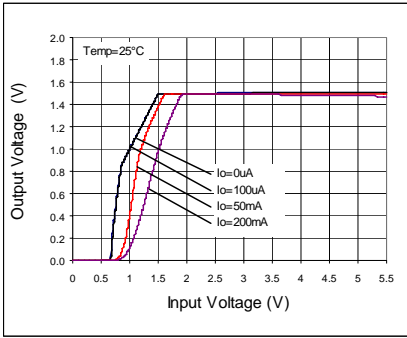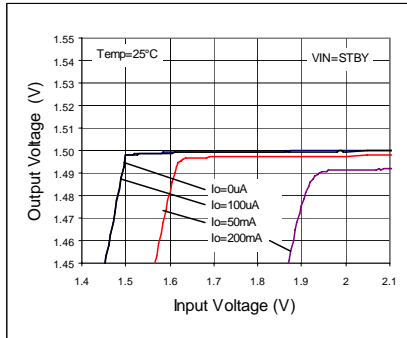


**Fig 5. Circuit Current IGND**
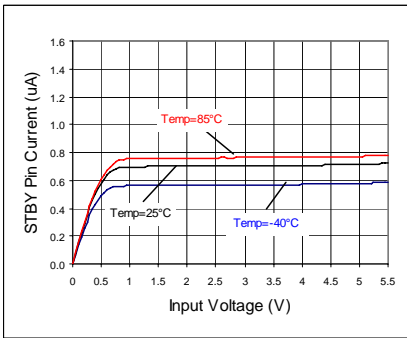


**Fig 6. VSTBY - ISTBY**
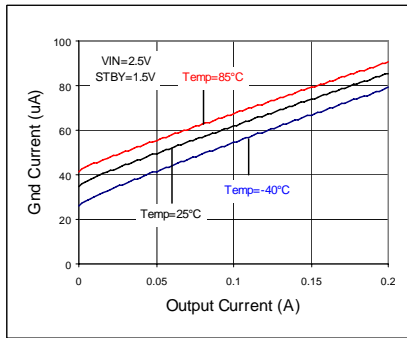


**Fig 7. IOUT - IGND**
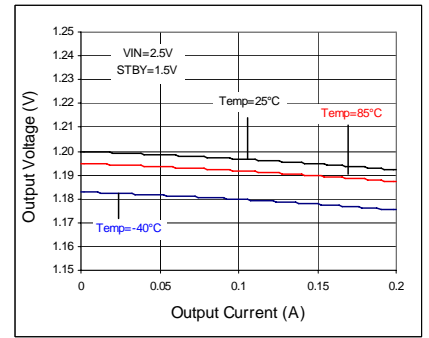


**Fig 8. Load Regulation**
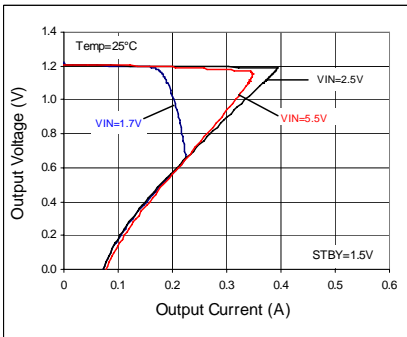


**Fig 9. OCP Threshold**
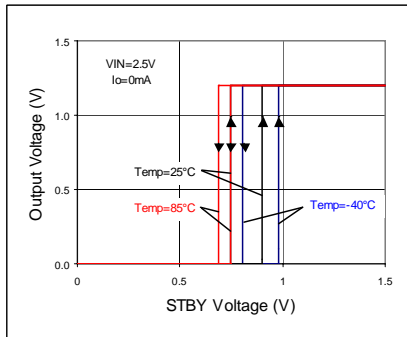


**Fig 10. STBY Threshold**
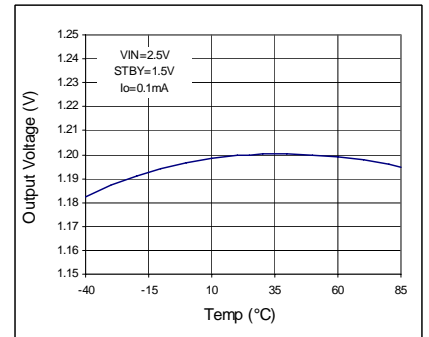


**Fig 11. VOUT - Temp**
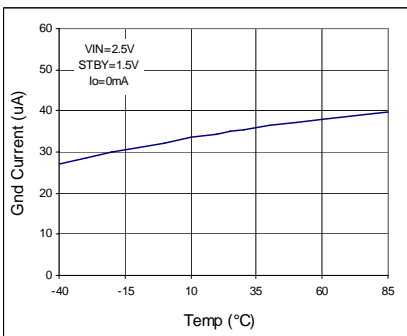


**Fig 12. IGND vs Temp**



**Fig 13. IGND - Temp (STBY)**

**TSZ02201-0RBR0A300050-1-2**
**14.Jan.2013.Rev.008**
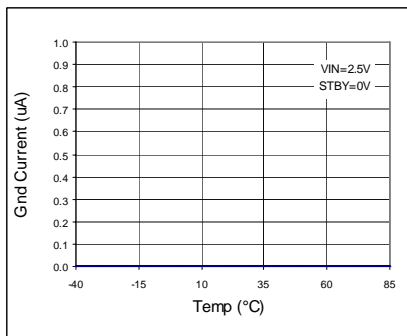
●Reference data  BU12TD2WNVX  (Ta=25ºC unless otherwise specified.)
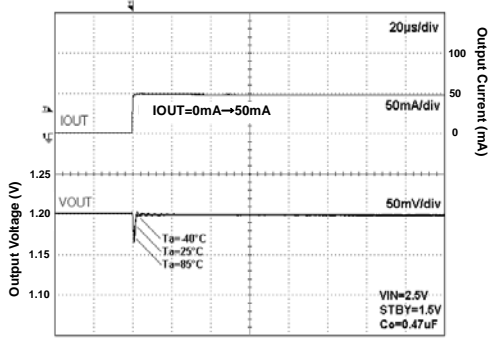


**Fig 14. Load Response**
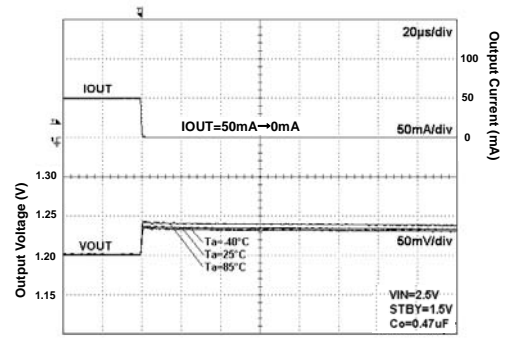


**Fig 15. Load Response**
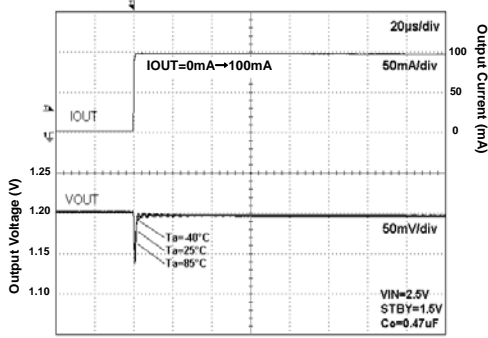


**Fig 16. Load Response**
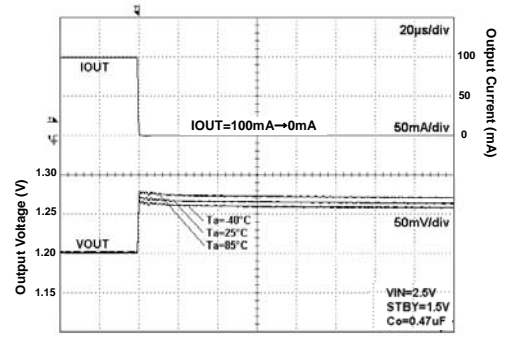


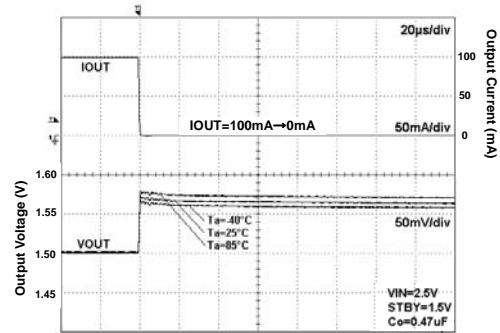**Fig 17. Load Response**
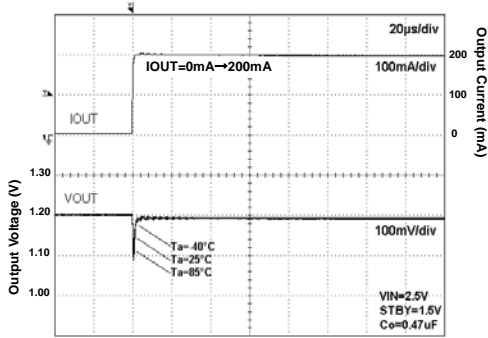


**Fig 18. Load Response**
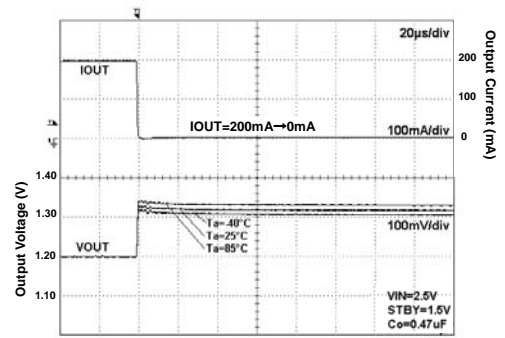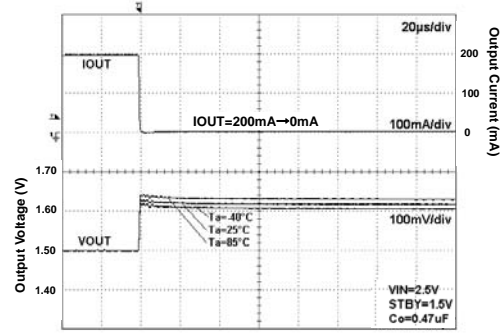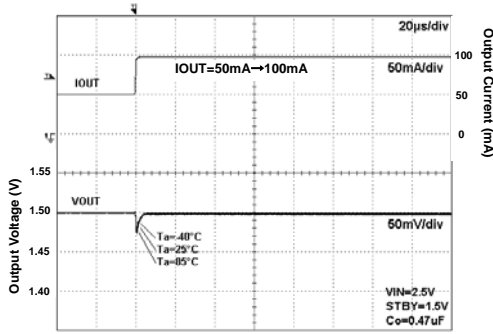


**Fig 19. Load Response**
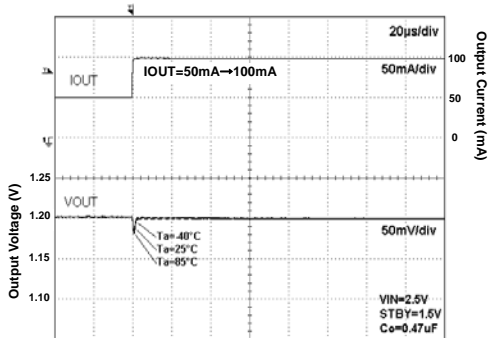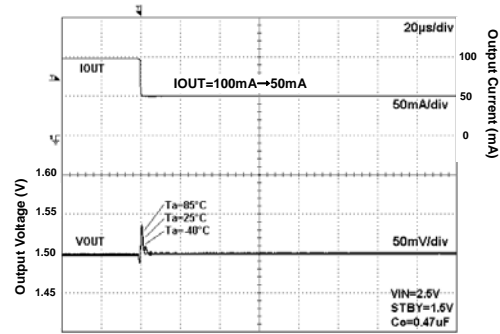


**Fig 20. Load Response**
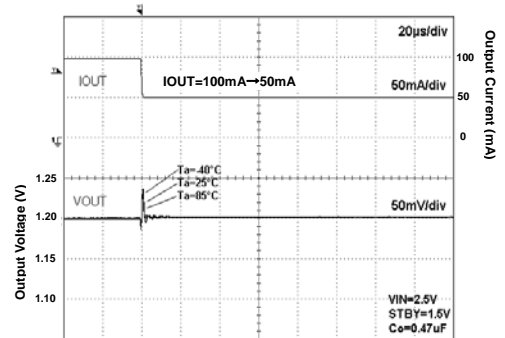


**Fig 21. Load Response**

●Reference data  BU12TD2WNVX   (Ta=25ºC unless otherwise specified.)

**Fig 22. Start Up Time**
**Iout=0mA**

**Fig 23. Start Up Time**
**Iout=200mA**
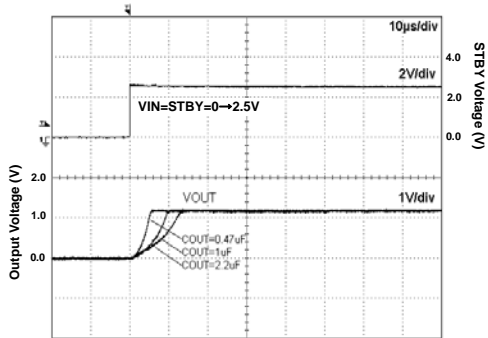
**Fig 24. Start Up Time**
**(VIN=STBY) Iout=0mA**
**Iout=0mA**
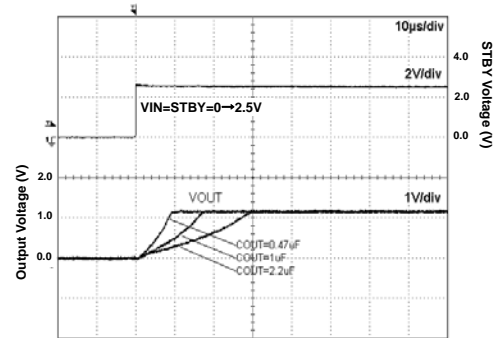
**Fig 25. Start Up Time**
**(VIN=STBY) Iout=200mA**

**Fig 26. Discharge Time**

**Fig 27. VIN Response**

●Reference data   BU15TD2WNVX      (Ta=25ºC unless otherwise specified.)



**Fig 28. Output Voltage**



**Fig 29. Line Regulation**
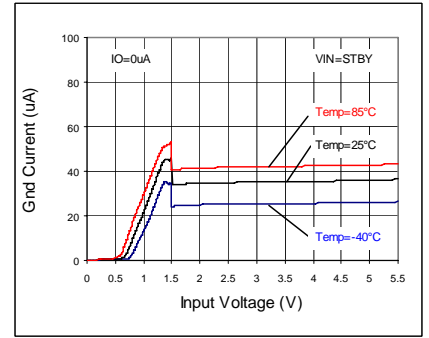


**Fig 30. Circuit Current IGND**
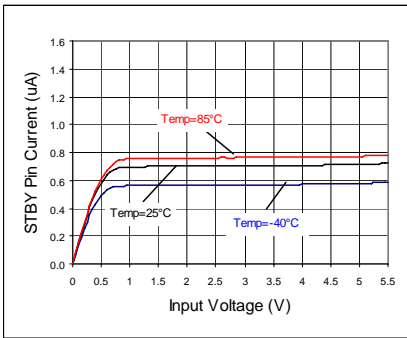


**Fig 31. VSTBY - ISTBY**
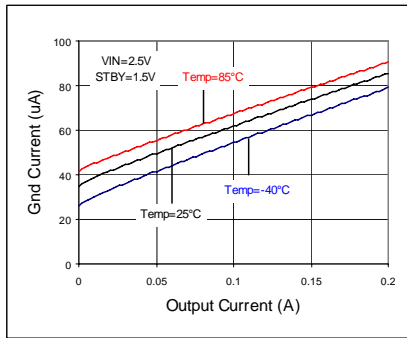


**Fig 32. IOUT - IGND**
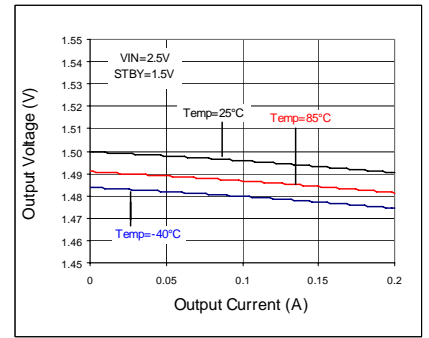


**Fig 33. Load Regulation**
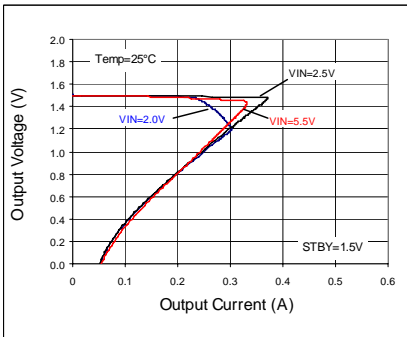


**Fig 34. OCP Threshold**
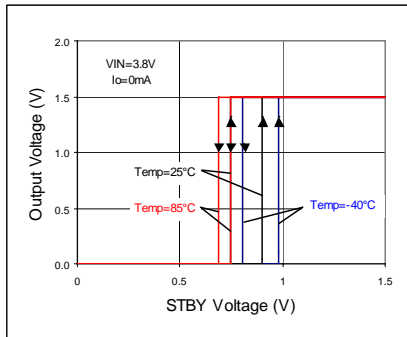


**Fig 35. STBY Threshold**
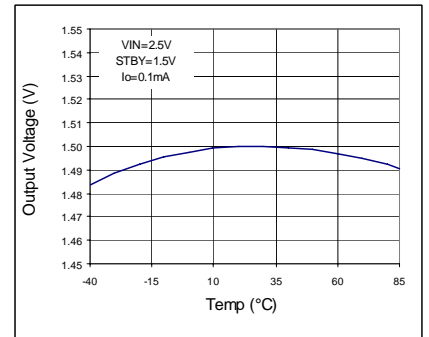


**Fig 36. VOUT - Temp**
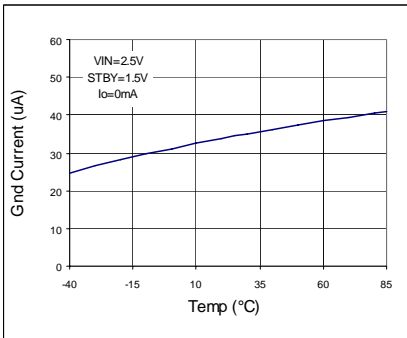


**Fig 37. IGND vs Temp**
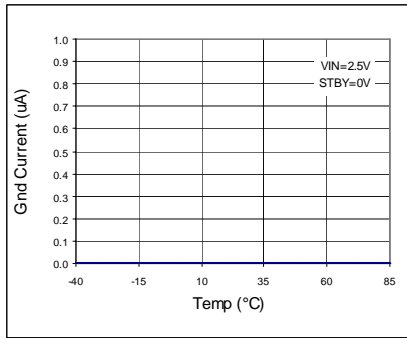


**Fig 38. IGND vs Temp (STBY)**

●Reference data  BU15TD2WNVX  (Ta=25ºC unless otherwise specified.)

**Fig 39. Load Response**
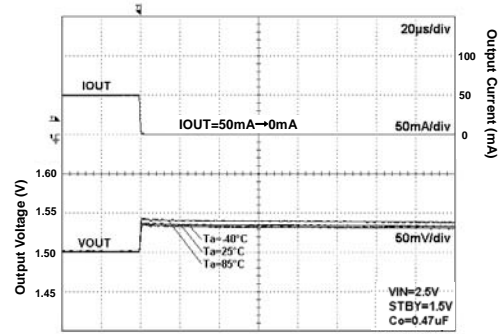
**Fig 40. Load Response**

**Fig 41. Load Response**

**Fig 42. Load Response**
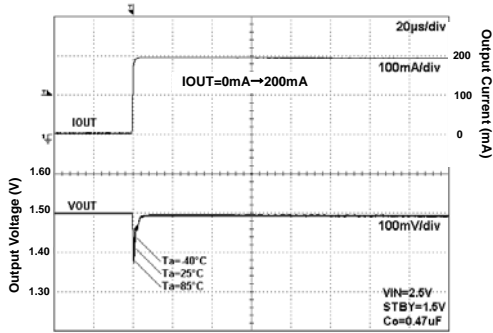
**Fig 43. Load Response**

**Fig 44. Load Response**

**Fig 45. Load Response**

**Fig 46. Load Response**

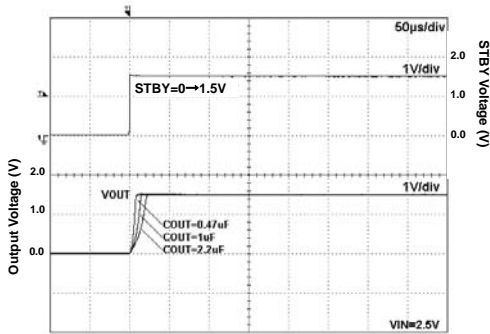●Reference data  BU15TD2WNVX    (Ta=25ºC unless otherwise specified.)
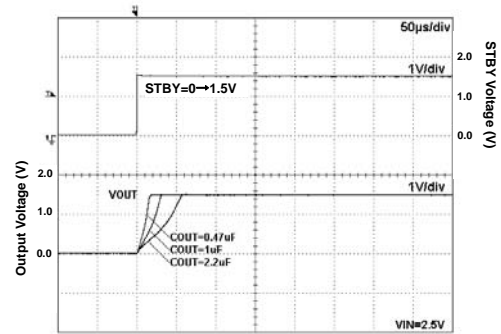


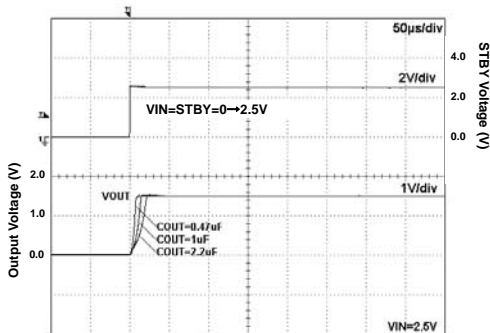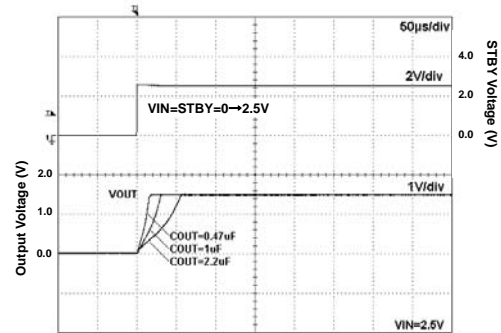**Fig 47. Start Up Time**
**Iout=0mA**



**Fig 48. Start Up Time**
**Iout=200mA**



**Fig 49. Start Up Time**
**(VIN=STBY) Iout=0mA**
**Iout=0mA**



**Fig 50. Start Up Time**
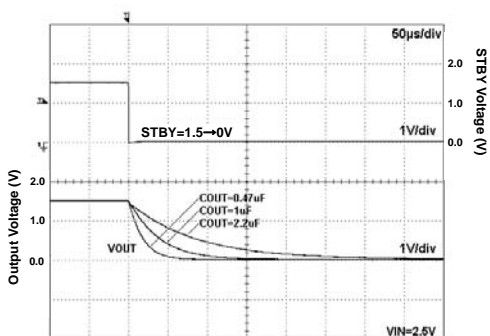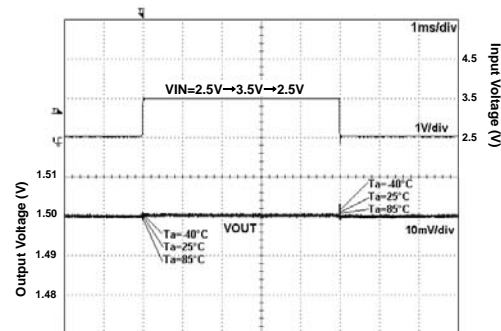**(VIN=STBY) Iout=200mA**



**Fig 51. Discharge Time**



**Fig 52. VIN Response**

●Reference data　BU18TD2WNVX　　(Ta=25ºC unless otherwise specified.)
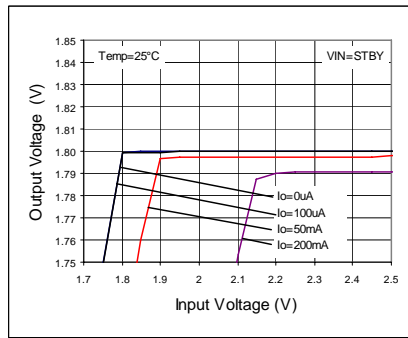


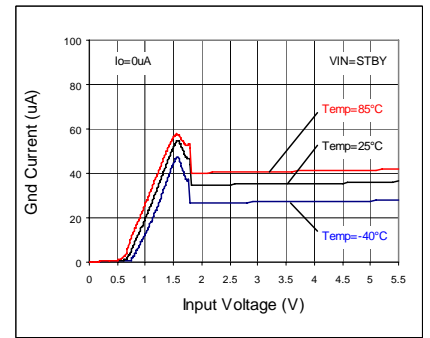**Fig 53. Output Voltage**



**Fig 54. Line Regulation**



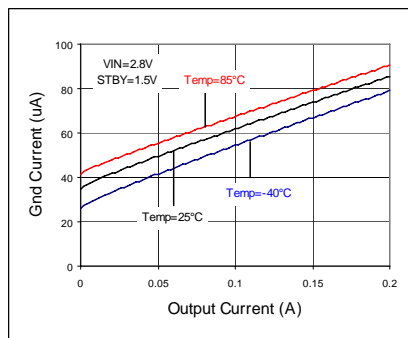**Fig 55. Circuit Current IGND**



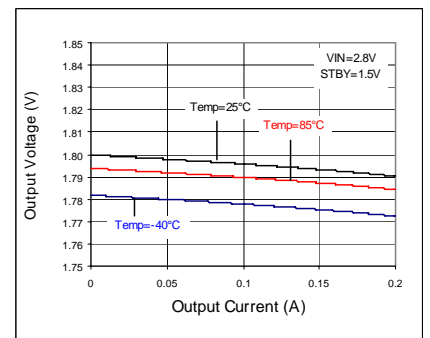**Fig 56. VSTBY - ISTBY**


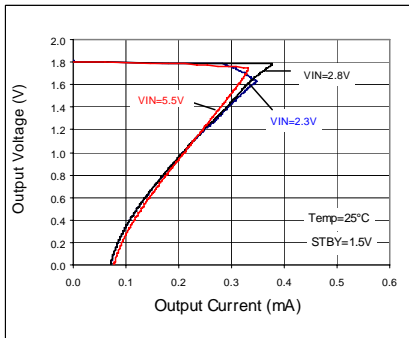
**Fig 57. IOUT - IGND**



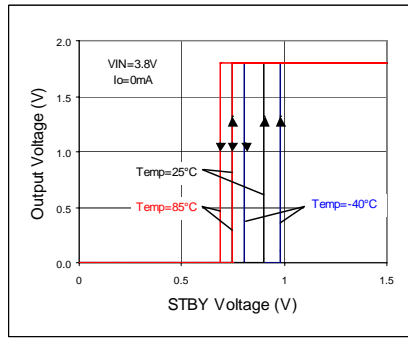**Fig 58. Load Regulation**



**Fig 59. OCP Threshold**



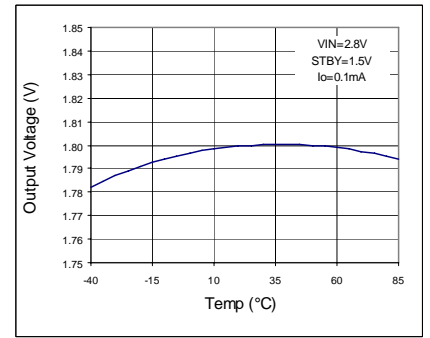**Fig 60. STBY Threshold**
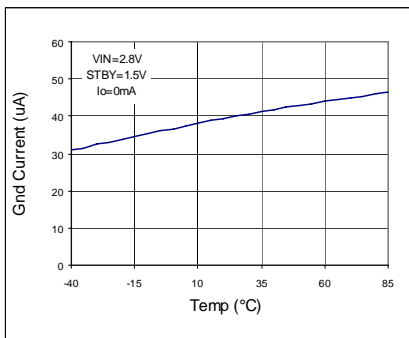


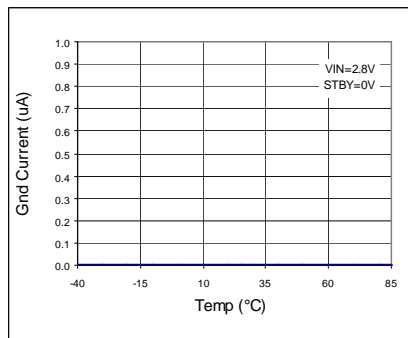**Fig 61. VOUT - Temp**



**Fig 62. IGND - Temp**



**Fig 63. IGND - Temp (STBY)**

●Reference data  BU18TD2WNVX   (Ta=25ºC unless otherwise specified.)



**Fig 64. Load Response**



**Fig 65. Load Response**



**Fig 66. Load Response**
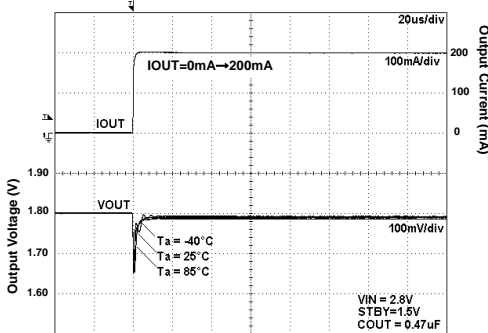


**Fig 67. Load Response**
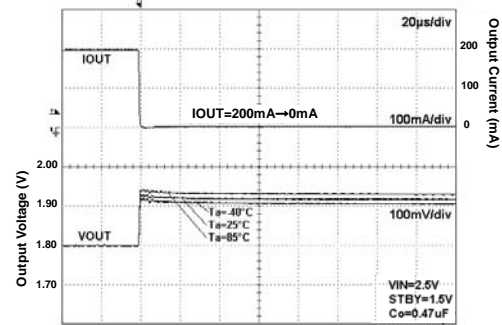


**Fig 68. Load Response**



**Fig 69. Load Response**



**Fig 70. Load Response**



**Fig 71. Load Response**

●Reference data  BU18TD2WNVX  (Ta=25ºC unless otherwise specified.)



**Fig 72. Start Up Time**
**Iout=0mA**



**Fig 73. Start Up Time**
**Iout=200mA**



**Fig 74. Start Up Time**
**(VIN=STBY) Iout=0mA**
**Iout=0mA**



**Fig 75. Start Up Time**
**(VIN=STBY) Iout=200mA**



**Fig 76. Discharge Time**



**Fig 77. VIN Response**

●Reference data  BU19TD2WNVX   (Ta=25ºC unless otherwise specified.)



**Fig 78. Output Voltage**



**Fig 79. Line Regulation**



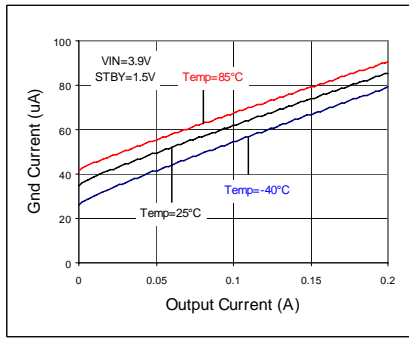**Fig 80. Circuit Current IGND**



**Fig 81. VSTBY - ISTBY**



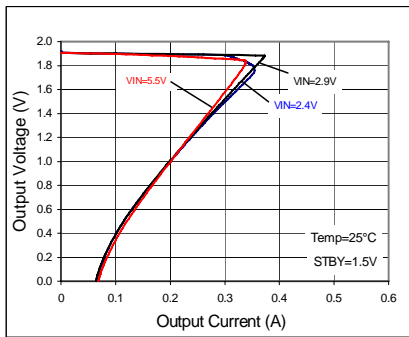**Fig 82. IOUT - IGND**



**Fig 83. Load Regulation**
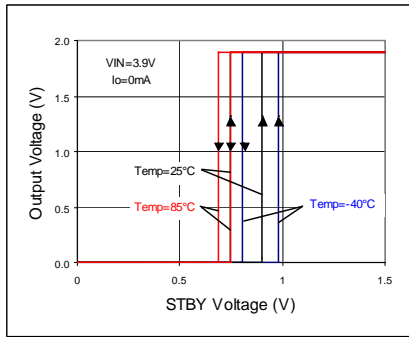


**Fig 84. OCP Threshold**



**Fig 85. STBY Threshold**
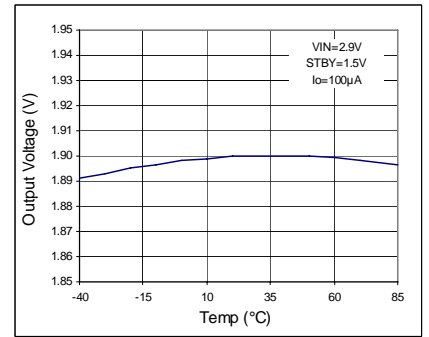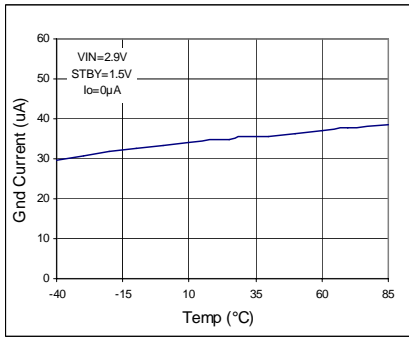


**Fig 86. VOUT - Temp**



**Fig 87. IGND - Temp**



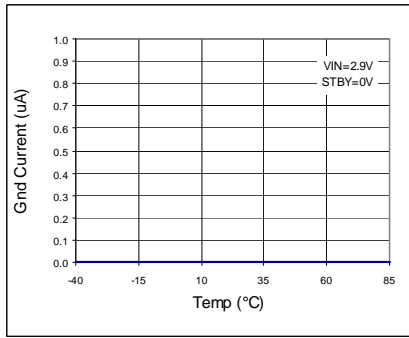**Fig 88. IGND - Temp (STBY)**

● Reference data   BU19TD2WNVX   (Ta=25ºC unless otherwise specified.)
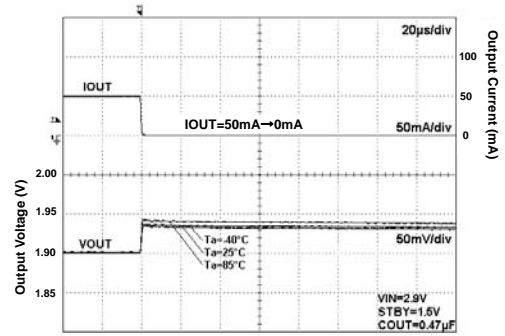


**Fig 89. Load Response**



**Fig 90. Load Response**



**Fig 91. Load Response**
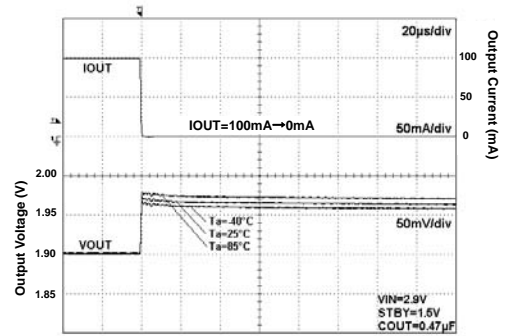


**Fig 92. Load Response**
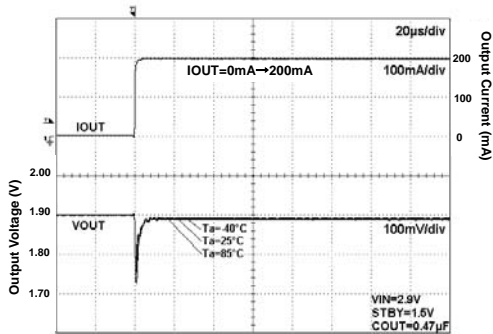


**Fig 93. Load Response**



**Fig 94. Load Response**



**Fig 95. Load Response**



**Fig 96. Load Response**

●Reference data  BU19TD2WNVX    (Ta=25ºC unless otherwise specified.)
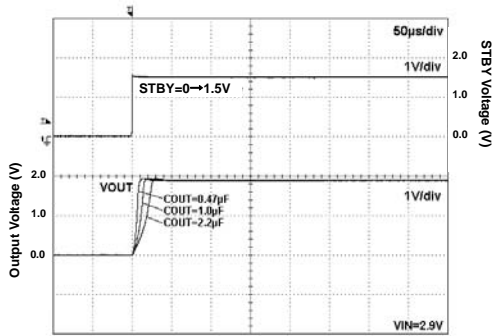
**Fig 97. Start Up Time**
**Iout=0mA**

**Fig 98. Start Up Time**
**Iout=200mA**

**Fig 99. Start Up Time**
**(VIN=STBY) Iout=0mA**
**Iout=0mA**

**Fig 100. Start Up Time**
**(VIN=STBY) Iout=200mA**

**Fig 101. Discharge Time**

**Fig 102. VIN Response**

●Reference data  BU25TD2WNVX   (Ta=25ºC unless otherwise specified.)



**Fig 103. Output Voltage**



**Fig 104. Line Regulation**
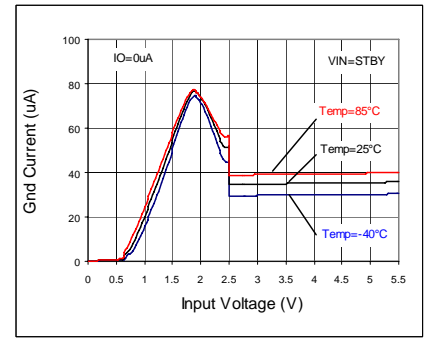


**Fig 105. Circuit Current IGND**



**Fig 106. VSTBY - ISTBY**



**Fig 107. IOUT - IGND**
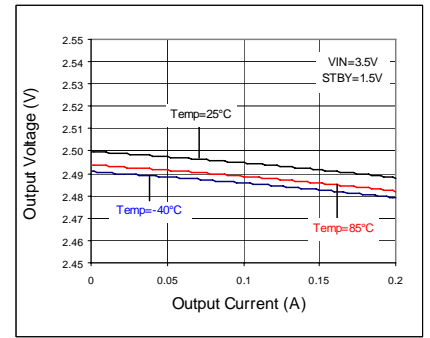


**Fig 108. Load Regulation**



**Fig 109. Dropout Voltage**



**Fig 110. OCP Threshold**
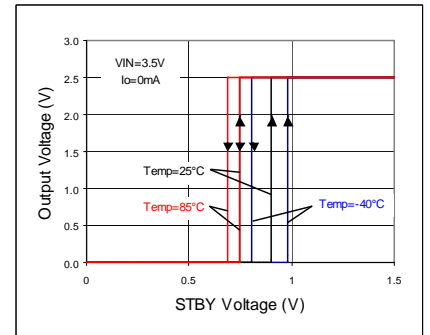


**Fig 111. STBY Threshold**



**Fig 112. VOUT - Temp**



**Fig 113. IGND - Temp**
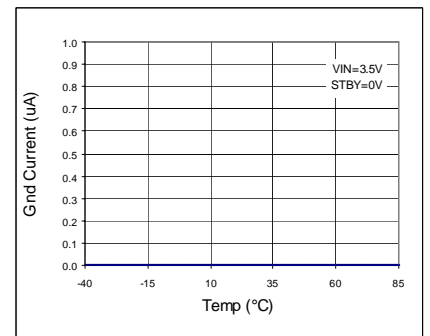


**Fig 114. IGND - Temp (STBY)**

●Reference data   BU25TD2WNVX   (Ta=25ºC unless otherwise specified.)



**Fig 115. Load Response**



**Fig 116. Load Response**
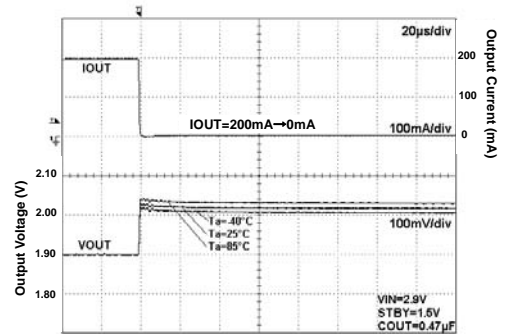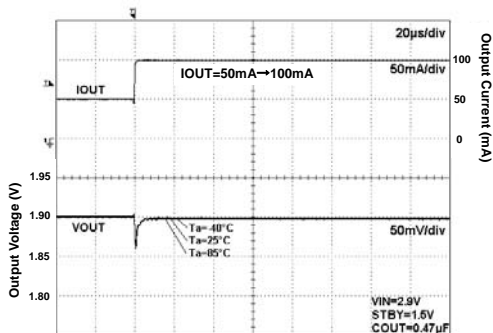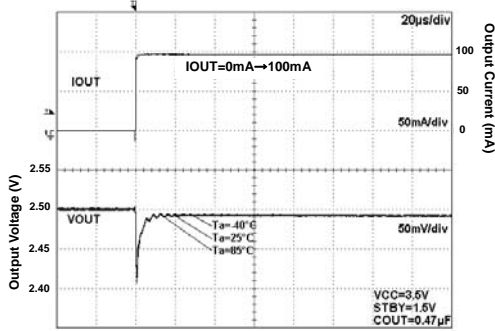


**Fig 117. Load Response**



**Fig 118. Load Response**



**Fig 119. Load Response**



**Fig 120. Load Response**
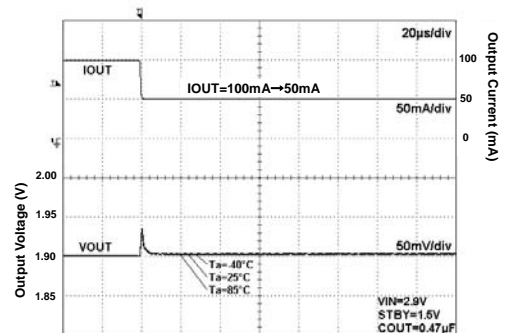


**Fig 121. Load Response**



**Fig 122. Load Response**

●Reference data   BU25TD2WNVX    (Ta=25ºC unless otherwise specified.)



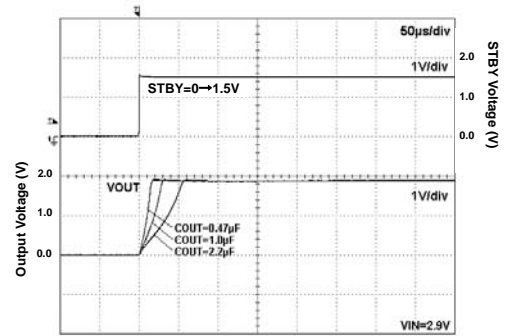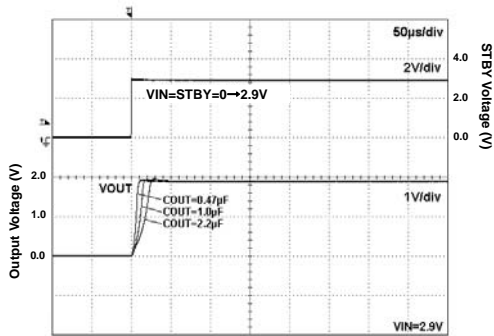**Fig 123. Start Up Time**
**Iout=0mA**



**Fig 124. Start Up Time**
**Iout=200mA**



**Fig 125. Start Up Time**
**(VIN=STBY) Iout=0mA**
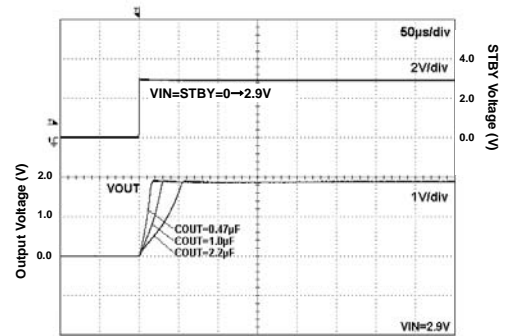**Iout=0mA**



**Fig 126. Start Up Time**
**(VIN=STBY) Iout=200mA**
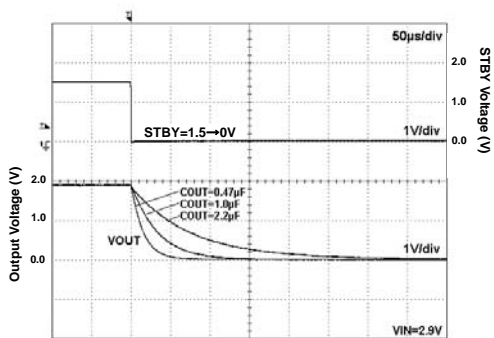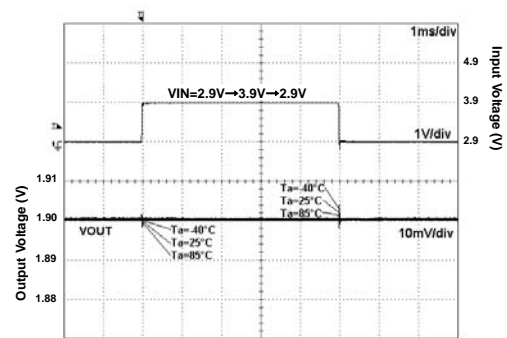


**Fig 127. Discharge Time**



**Fig 128. VIN Response**

●Reference data   BU26TD2WNVX    (Ta=25ºC unless otherwise specified.)



**Fig 129. Output Voltage**



**Fig 130. Line Regulation**



**Fig 131. Circuit Current IGND**
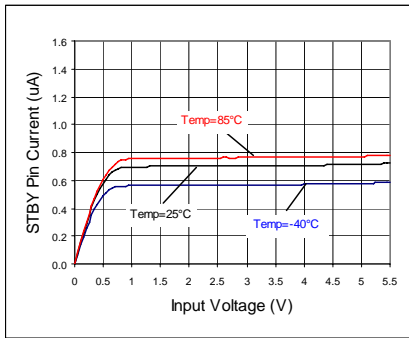


**Fig 132. VSTBY - ISTBY**
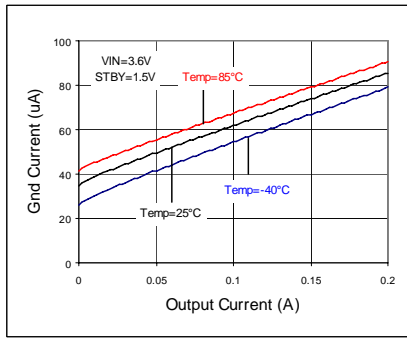


**Fig 133. IOUT - IGND**
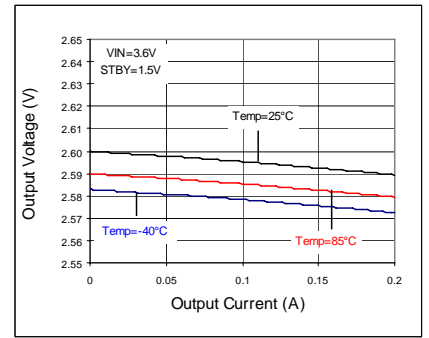


**Fig 134. Load Regulation**
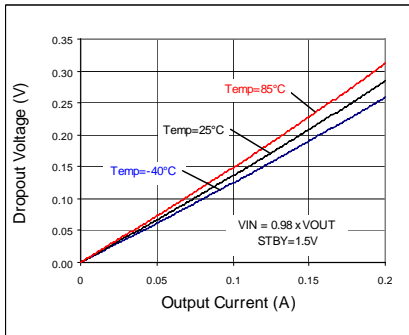


**Fig 135. Dropout Voltage**
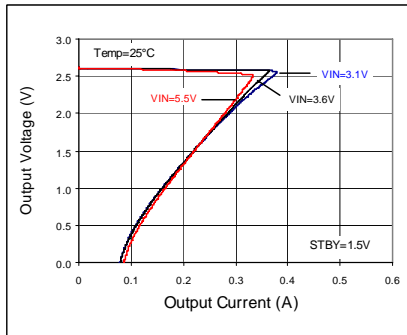


**Fig 136. OCP Threshold**
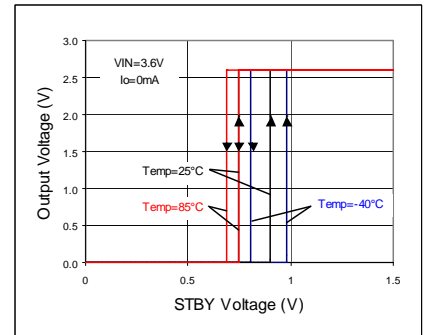


**Fig 137. STBY Threshold**



**Fig 138. VOUT - Temp**



**Fig 139. IGND - Temp**



**Fig 140. IGND - Temp (STBY)**

www.rohm.com
TSZ22111・15・001

© 2013 ROHM Co., Ltd. All rights reserved.

20/40

TSZ02201-0RBR0A300050-1-2
14.Jan.2013.Rev.008

●Reference data   BU26TD2WNVX    (Ta=25ºC unless otherwise specified.)

**Fig 141. Load Response**

**Fig 142. Load Response**

**Fig 143. Load Response**

**Fig 144. Load Response**
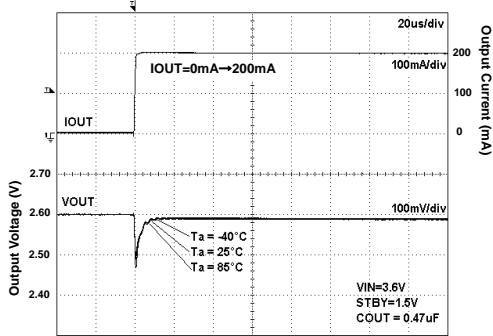
**Fig 145. Load Response**

**Fig 146. Load Response**
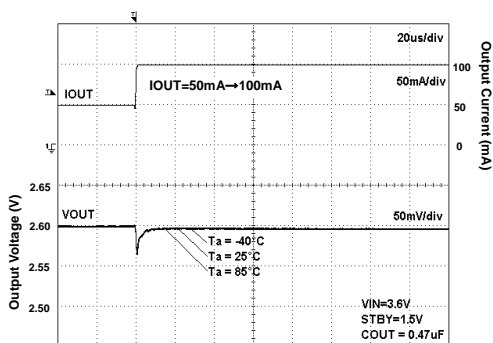
**Fig 147. Load Response**
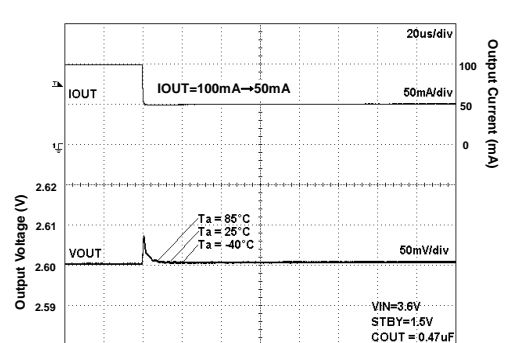
**Fig 148. Load Response**

●Reference data  BU26TD2WNVX    (Ta=25ºC unless otherwise specified.)



**Fig 149. Start Up Time**
**Iout=0mA**



**Fig 150. Start Up Time**
**Iout=200mA**



**Fig 151. Start Up Time**
**(VIN=STBY) Iout=0mA**
**Iout=0mA**



**Fig 152. Start Up Time**
**(VIN=STBY) Iout=200mA**



**Fig 153. Discharge Time**



**Fig 154. VIN Response**
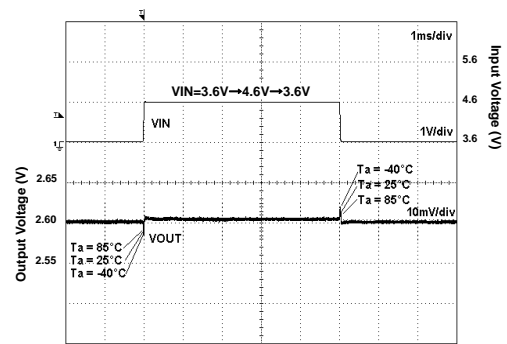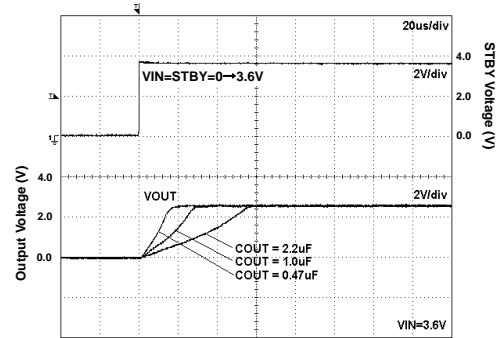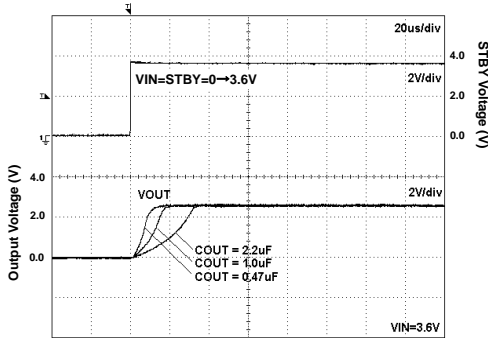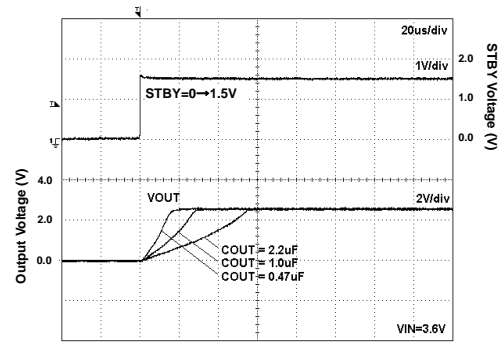
●Reference data   BU27TD2WNVX     (Ta=25ºC unless otherwise specified.)
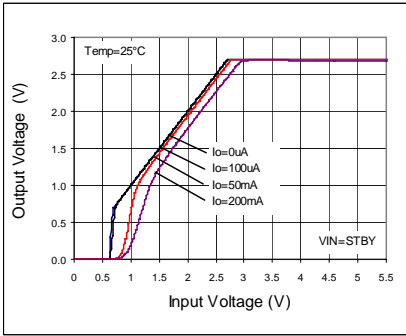
**Fig 155. Output Voltage**
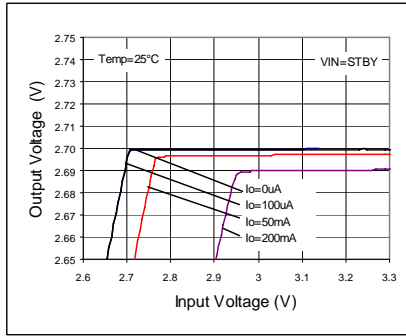
**Fig 156. Line Regulation**
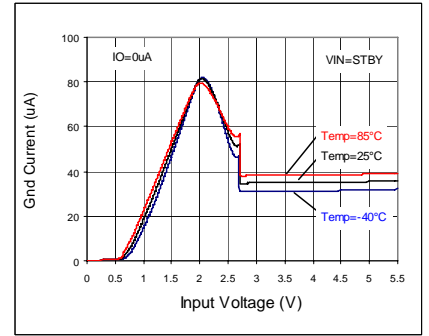
**Fig 157. Circuit Current IGND**
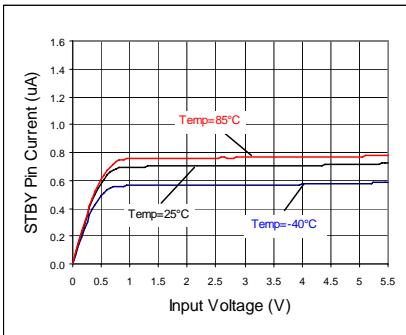
**Fig 158. VSTBY - ISTBY**
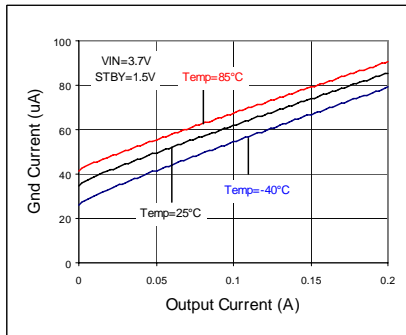
**Fig 159. IOUT - IGND**
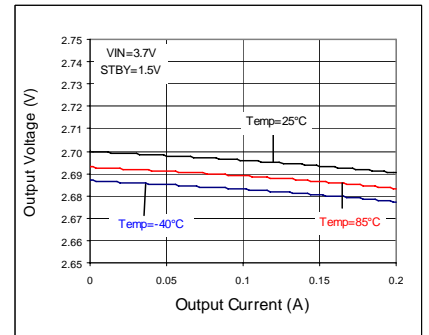
**Fig 160. Load Regulation**
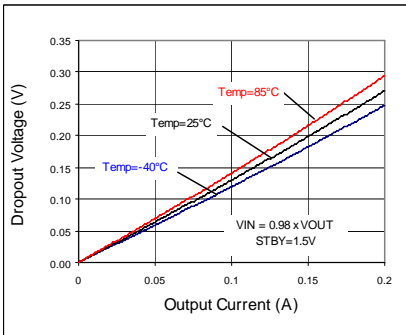
**Fig 161. Dropout Voltage**
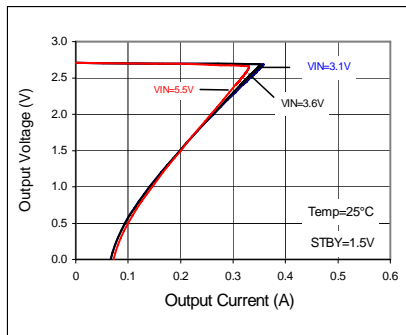
**Fig 162. OCP Threshold**
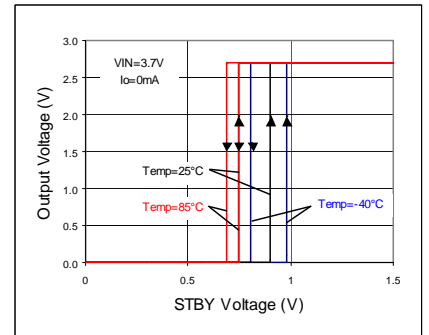
**Fig 163. STBY Threshold**

**Fig 164. VOUT - Temp**
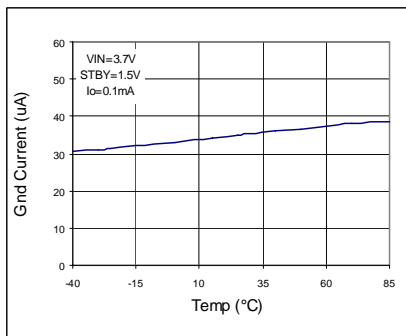
**Fig 165. IGND - Temp**

**Fig 166. IGND - Temp (STBY)**
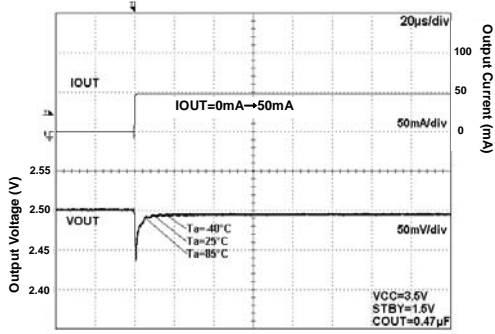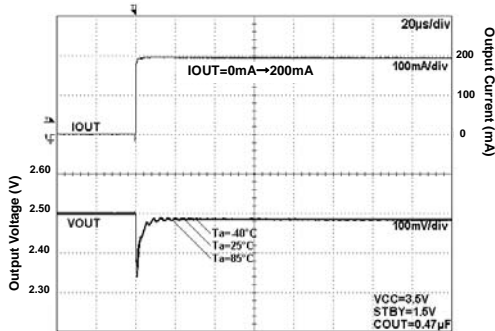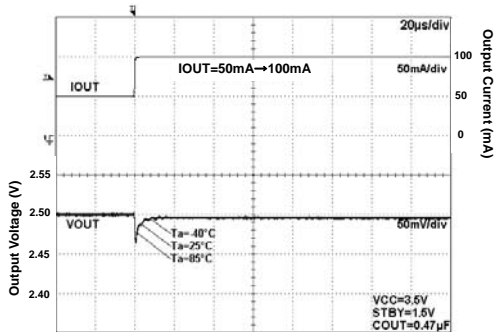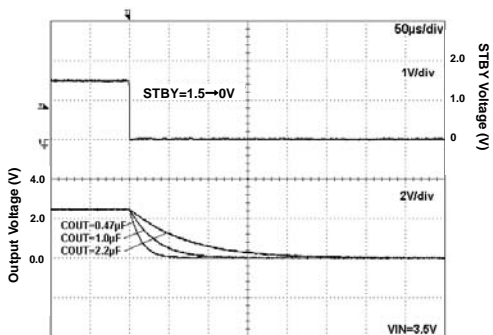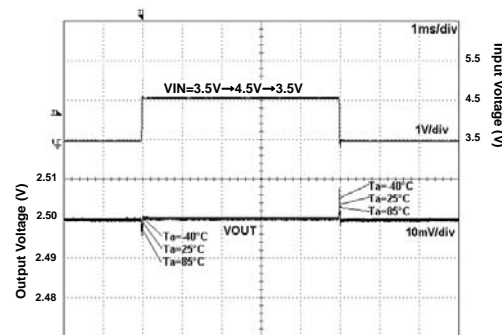
●Reference data    BU27TD2WNVX    (Ta=25°C unless otherwise specified.)
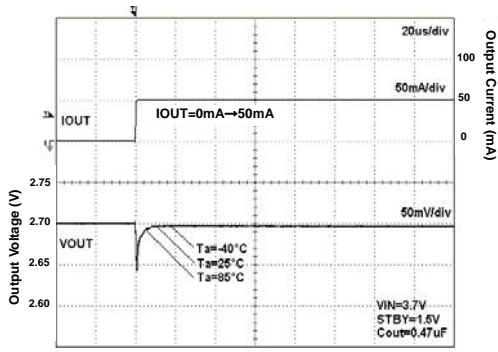
**Fig 167. Load Response**

**Fig 168. Load Response**

**Fig 169. Load Response**

**Fig 170. Load Response**
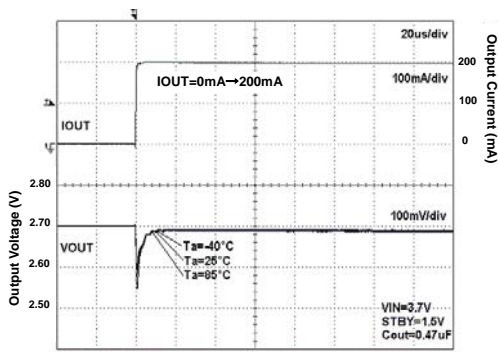
**Fig 171. Load Response**

**Fig 172. Load Response**

**Fig 173. Load Response**

**Fig 174. Load Response**

●Reference data   BU27TD2WNVX     (Ta=25ºC unless otherwise specified.)

**Fig 175. Start Up Time**
**Iout=0mA**

**Fig 176. Start Up Time**
**Iout=200mA**

**Fig 177. Start Up Time**
**(VIN=STBY) Iout=0mA**
**Iout=0mA**

**Fig 178. Start Up Time**
**(VIN=STBY) Iout=200mA**

**Fig 179. Discharge Time**

**Fig 180. VIN Response**

●Reference data   BU28TD2WNVX    (Ta=25ºC unless otherwise specified.)
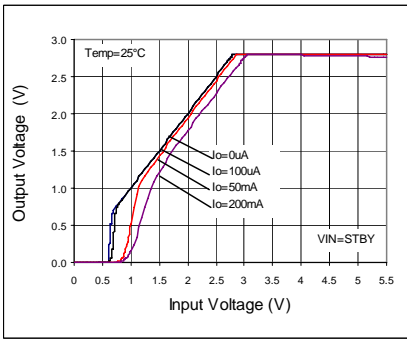


**Fig 181. Output Voltage**



**Fig 182. Line Regulation**



**Fig 183. Circuit Current IGND**
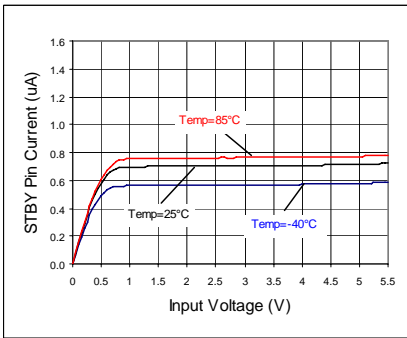


**Fig 184. VSTBY - ISTBY**



**Fig 185. IOUT - IGND**



**Fig 186. Load Regulation**
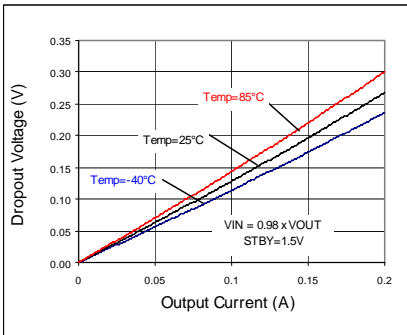


**Fig 187. Dropout Voltage**



**Fig 188. OCP Threshold**
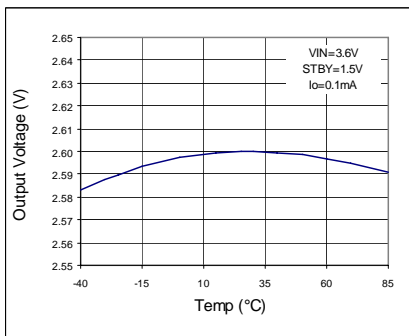


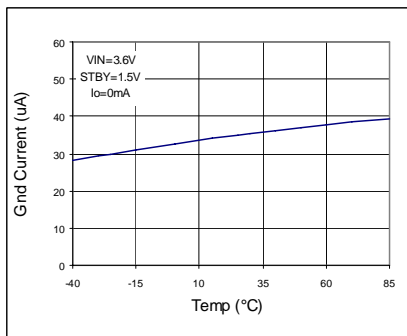**Fig 189. STBY Threshold**
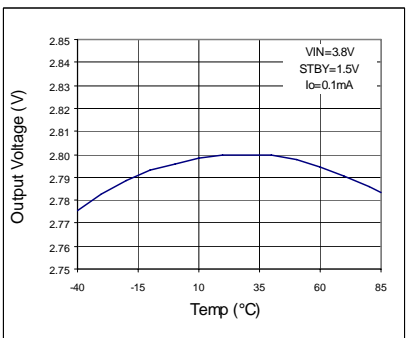


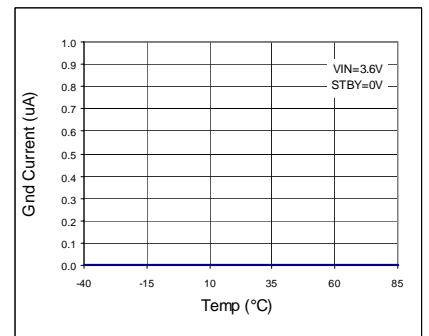**Fig 190. VOUT - Temp**



**Fig 191. IGND - Temp**



**Fig 192. IGND - Temp (STBY)**

● Reference data   BU28TD2WNVX    (Ta=25ºC unless otherwise specified.)
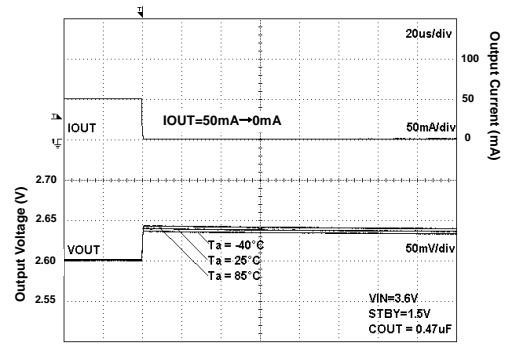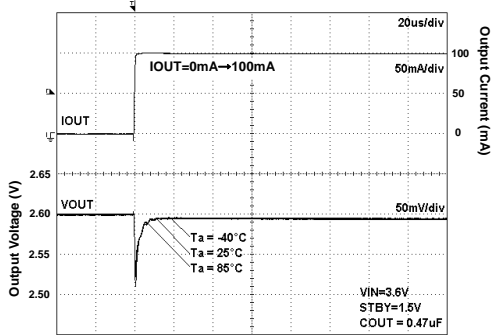
**Fig 193. Load Response**
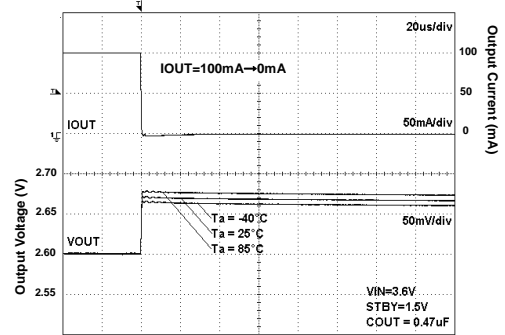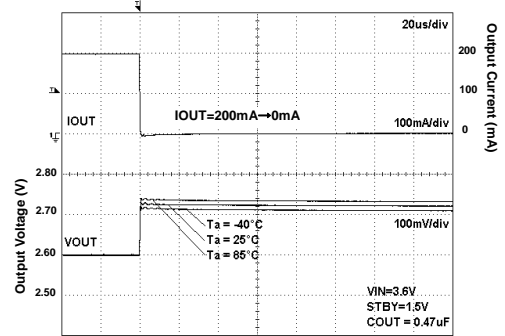
**Fig 194. Load Response**

**Fig 195. Load Response**

**Fig 196. Load Response**

**Fig 197. Load Response**

**Fige 198. Load Response**

**Fig 199. Load Response**

**Fig 200. Load Response**
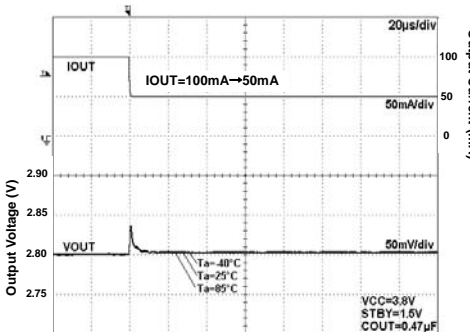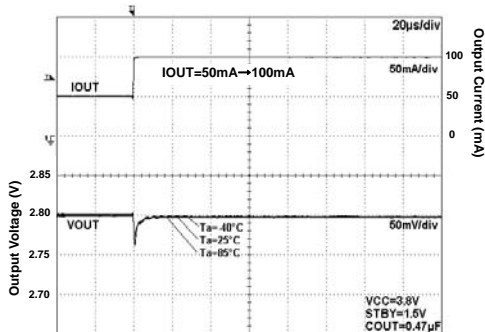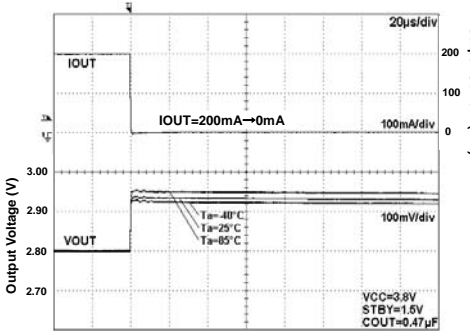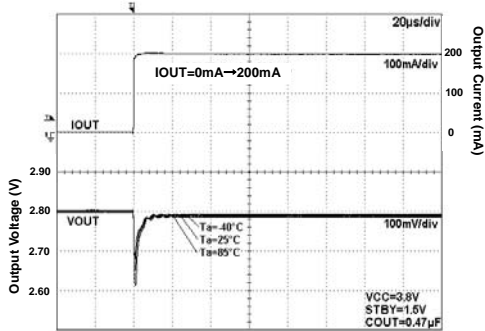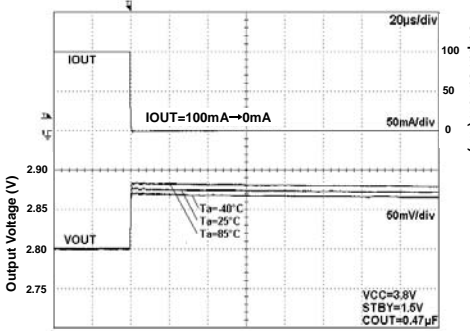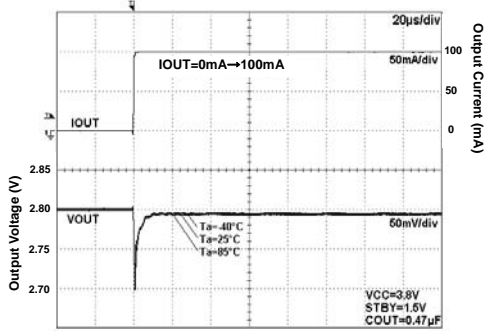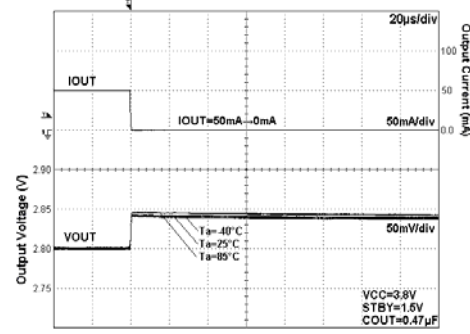
●Reference data  BU28TD2WNVX    (Ta=25ºC unless otherwise specified.)

**Fig 201. Start Up Time
Iout=0mA**
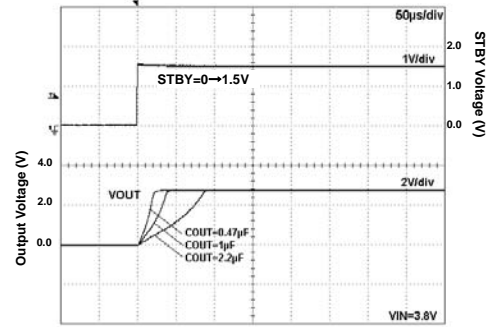
**Fig 202. Start Up Time
Iout=200mA**

**Fig 203. Start Up Time
(VIN=STBY) Iout=0mA
Iout=0mA**
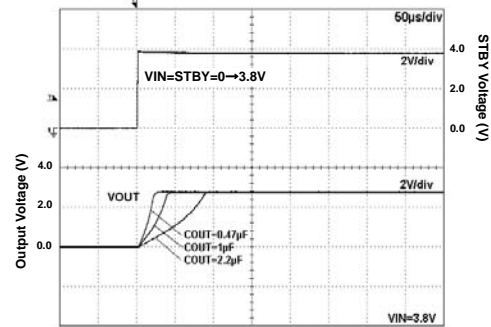
**Fig 204. Start Up Time
(VIN=STBY) Iout=200mA**

**Fig 205. Discharge Time**
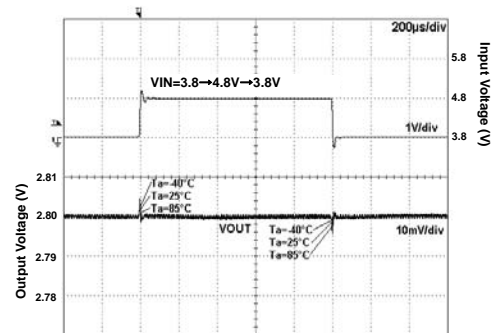
**Fig 206. VIN Response**

●Reference data   BU30TD2WNVX    (Ta=25ºC unless otherwise specified.)



**Fig 207. Output Voltage**
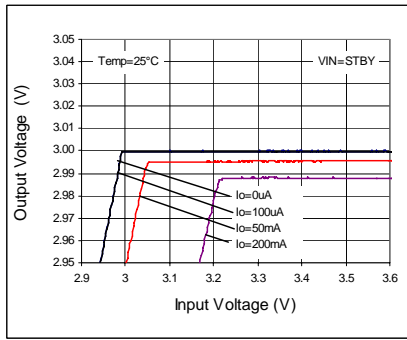


**Fig 208. Line Regulation**
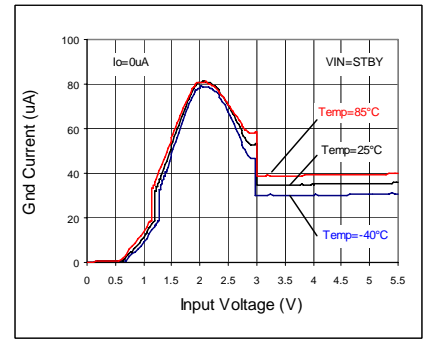


**Fig 209. Circuit Current IGND**



**Fig 210. VSTBY - ISTBY**
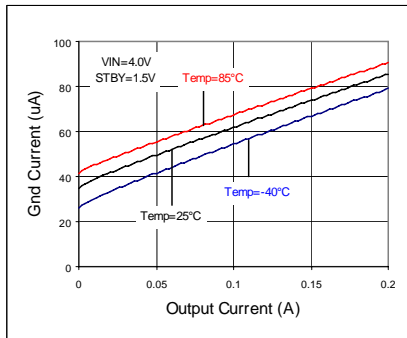


**Fig 211. IOUT - IGND**



**Fig 212. Load Regulation**



**Fig 213. Dropout Voltage**
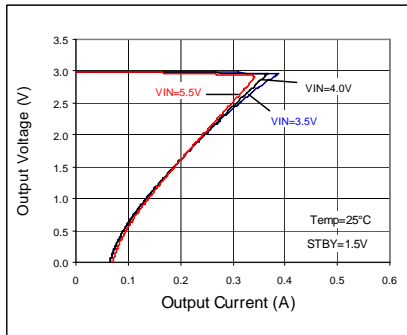


**Fig 214. OCP Threshold**



**Fig 215. STBY Threshold**



**Fig 216. VOUT - Temp**
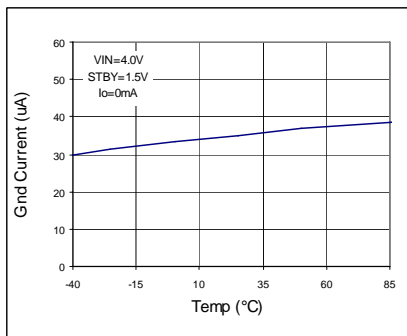


**Fig 217. IGND - Temp**



**Fig 218. IGND - Temp (STBY)**

●Reference data   BU30TD2WNVX    (Ta=25°C unless otherwise specified.)



**Fig 219. Load Response**
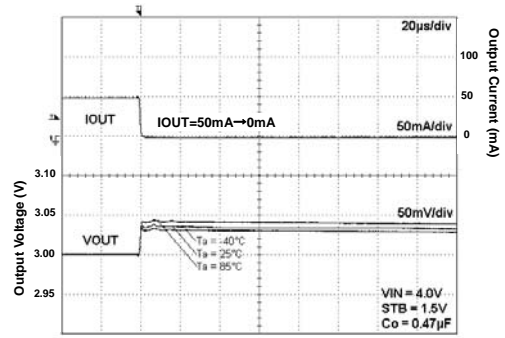


**Fig 220. Load Response**



**Fig 221. Load Response**
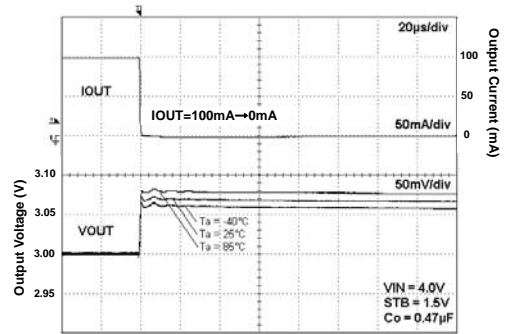


**Fig 222. Load Response**



**Fig 223. Load Response**
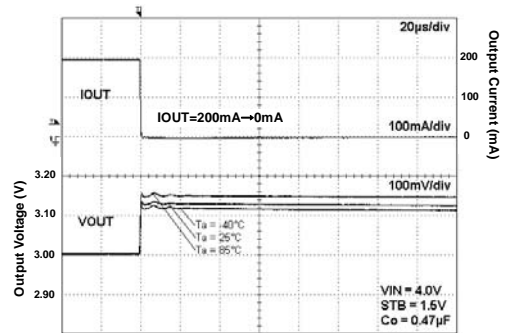

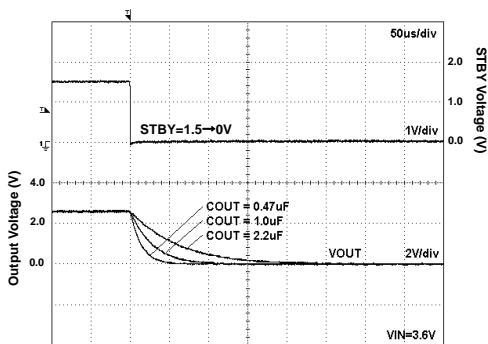
**Fig 224. Load Response**



**Fig 225. Load Response**
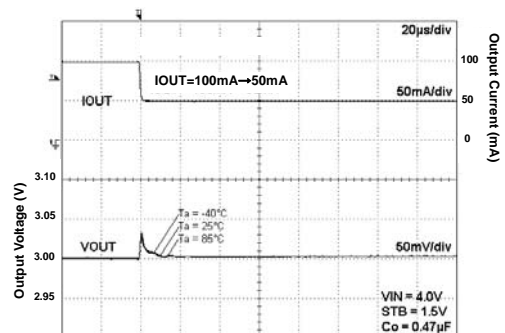


**Fig 226. Load Response**

●Reference data   BU30TD2WNVX    (Ta=25ºC unless otherwise specified.)

**Fig 227. Start Up Time
Iout=0mA**

**Fig 228. Start Up Time
Iout=200mA**

**Fig 229. Start Up Time
(VIN=STBY) Iout=0mA
Iout=0mA**

**Fig 230. Start Up Time
(VIN=STBY) Iout=200mA**

**Fig 231. Discharge Time**

**Fig 232. VIN Response**

●Reference data  BU31TD2WNVX   (Ta=25ºC unless otherwise specified.)
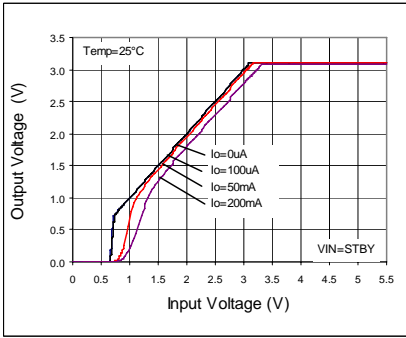


**Fig 233. Output Voltage**
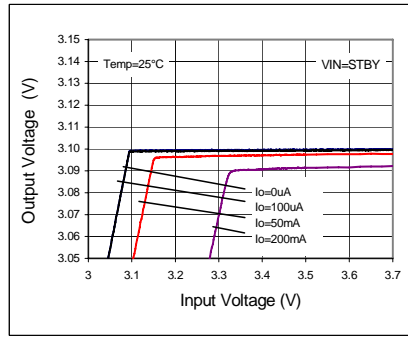


**Fig 234. Line Regulation**
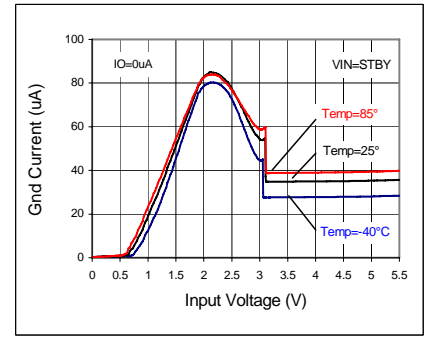


**Fig 235. Circuit Current IGND**
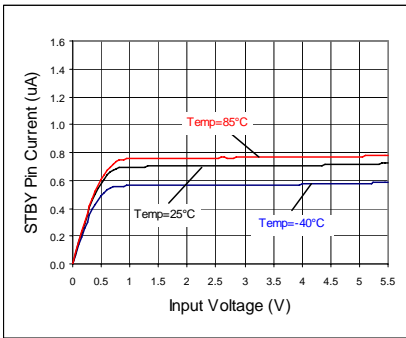


**Fig 236. VSTBY - ISTBY**
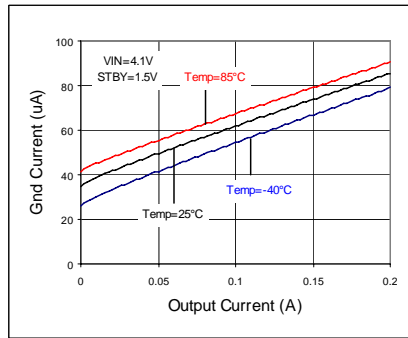


**Fig 237. IOUT - IGND**
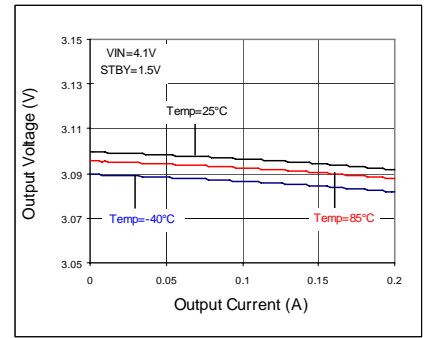


**Fig 238. Load Regulation**
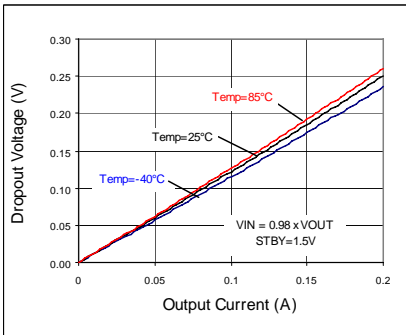


**Fig 239. Dropout Voltage**
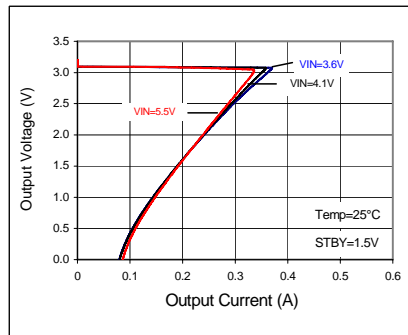


**Fig 240. OCP Threshold**
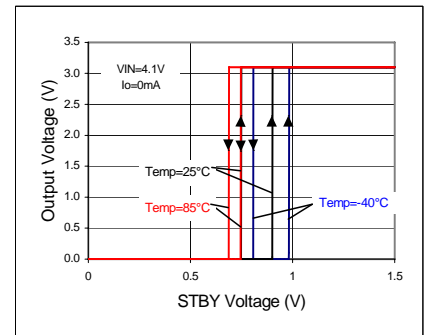


**Fig 241. STBY Threshold**
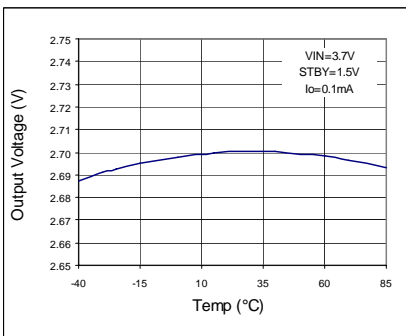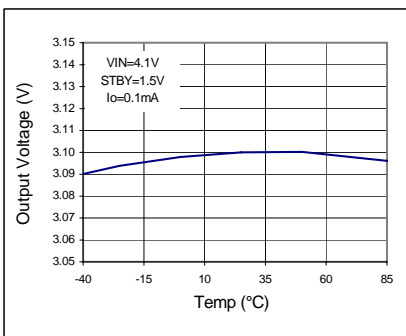


**Fig 242. VOUT - Temp**
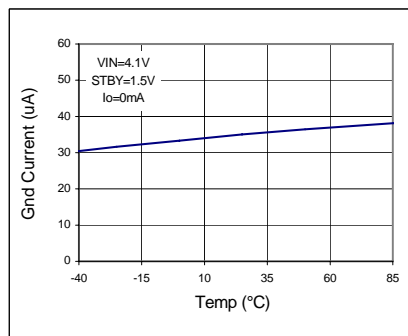


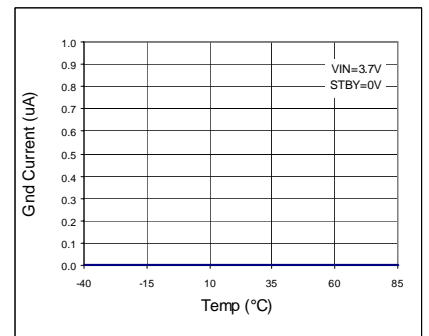**Fig 243. IGND - Temp**
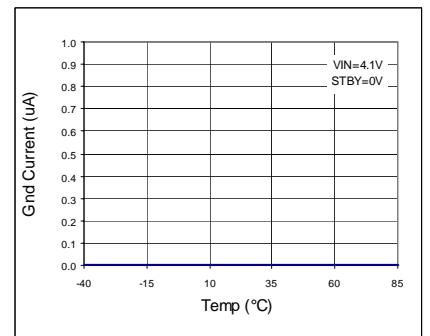


**Fig 244. IGND - Temp (STBY)**

●Reference data   BU31TD2WNVX   (Ta=25ºC unless otherwise specified.)



**Fig 245. Load Response**
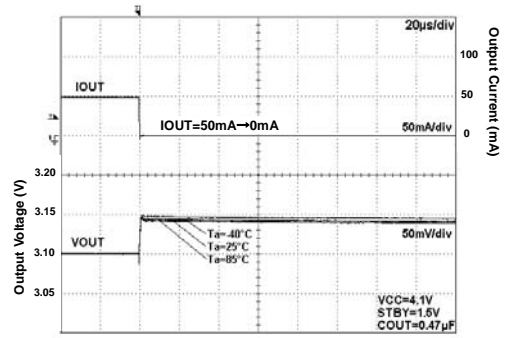


**Fig 246. Load Response**



**Fig 247. Load Response**
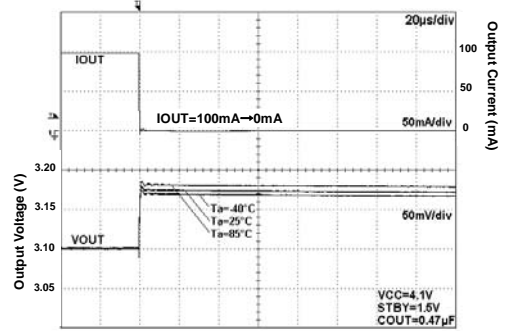


**Fig 248. Load Response**



**Fig 249. Load Response**
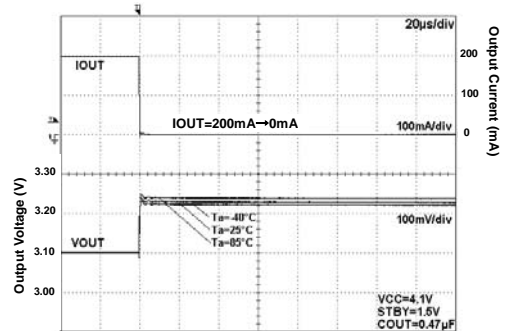


**Fig 250. Load Response**



**Fig 251. Load Response**
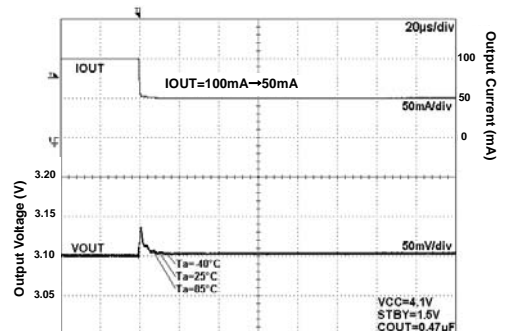


**Fig 252. Load Response**

●Reference data  BU31TD2WNVX   (Ta=25ºC unless otherwise specified.)
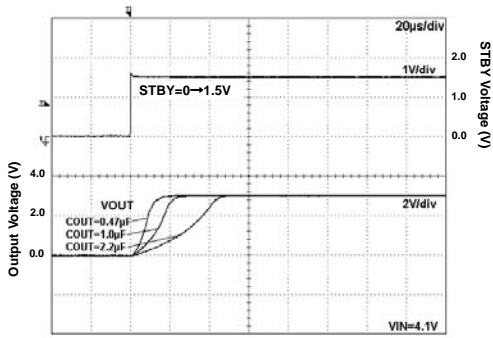


**Fig 253. Start Up Time
Iout=0mA**
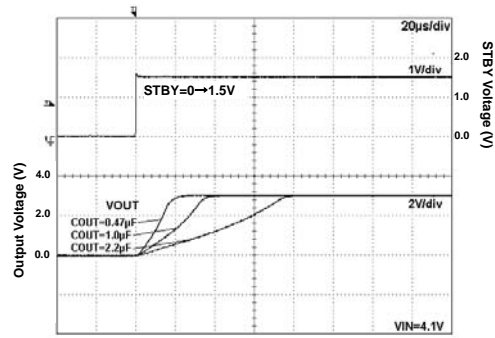


**Fig 254. Start Up Time
Iout=200mA**
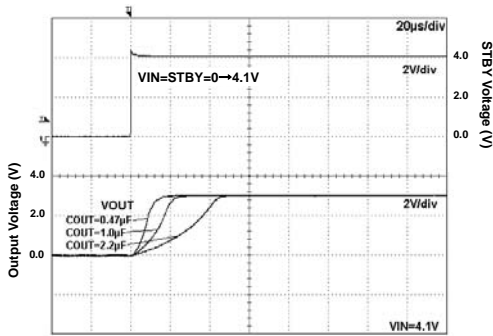


**Fig 255. Start Up Time
(VIN=STBY) Iout=0mA
Iout=0mA**
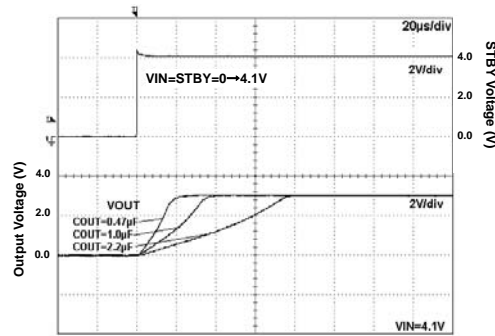


**Fig 256. Start Up Time
(VIN=STBY) Iout=200mA**
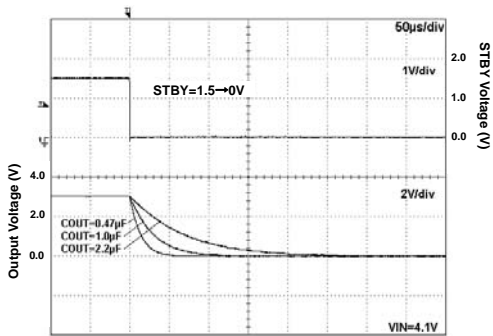


**Fig 257. Discharge Time**
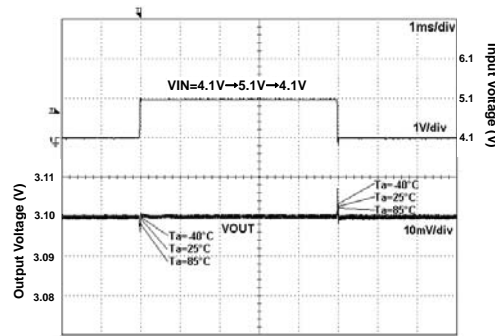


**Fig 258. VIN Response**

●Reference data   BU33TD2WNVX   (Ta=25ºC unless otherwise specified.)
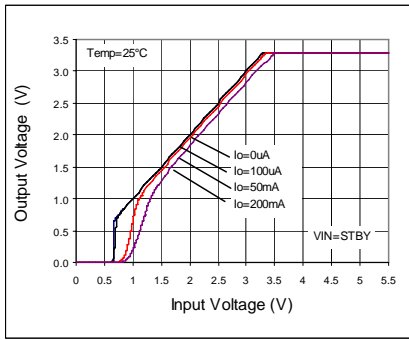

**Fig 259. Output Voltage**
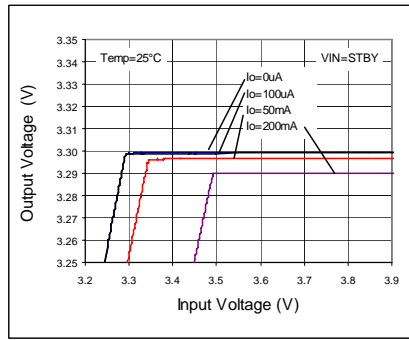

**Fig 260. Line Regulation**
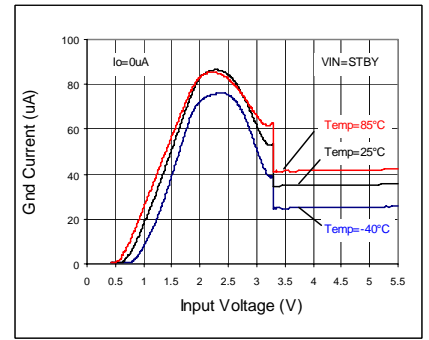

**Fig 261. Circuit Current IGND**
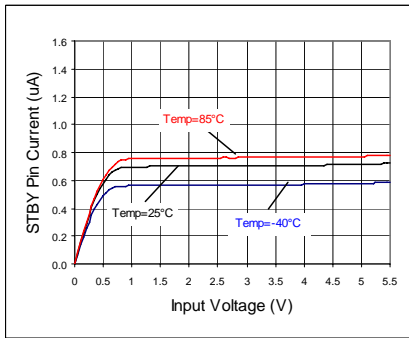

**Fig 262. VSTBY - ISTBY**
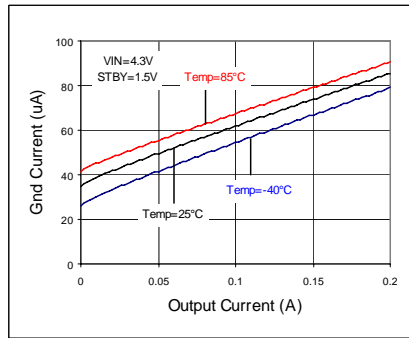

**Fig 263. IOUT - IGND**


**Fig 264. Load Regulation**
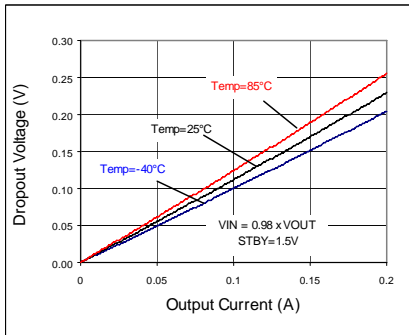

**Fig 265. Dropout Voltage**
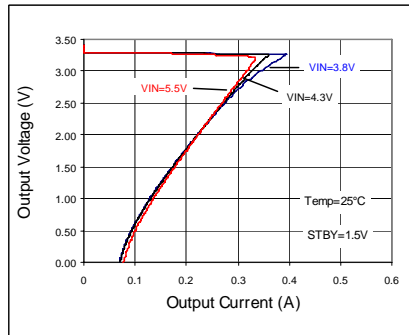

**Fig 266. OCP Threshold**


**Fig 267. STBY Threshold**
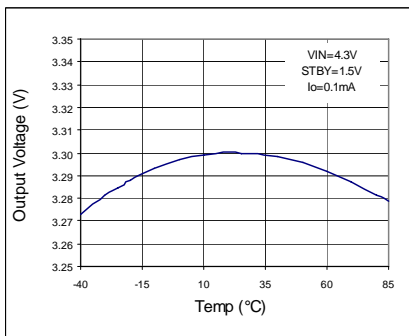

**Fig 268. VOUT - Temp**
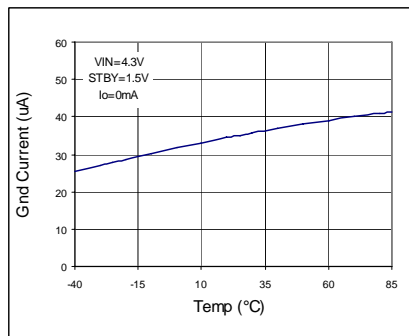

**Fig 269. IGND - Temp**


**Fig 270. IGND - Temp (STBY)**

●Reference data  BU33TD2WNVX  (Ta=25ºC unless otherwise specified.)
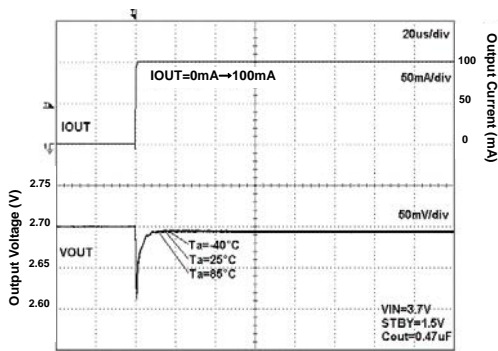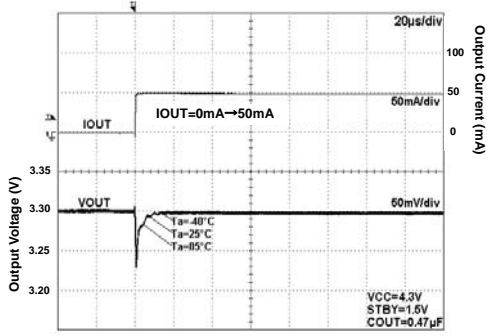
**Fig 271. Load Response**
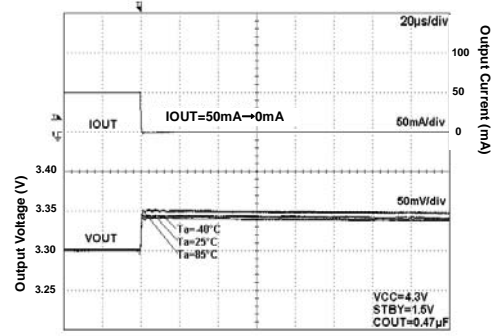
**Fig 272. Load Response**
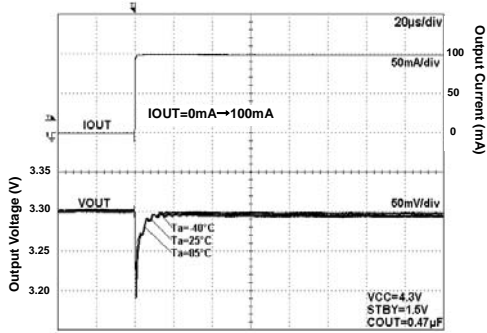
**Fig 273. Load Response**
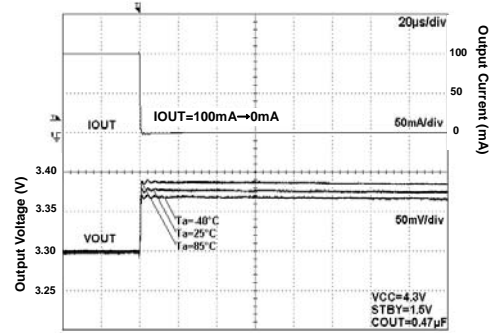
**Fig 274. Load Response**
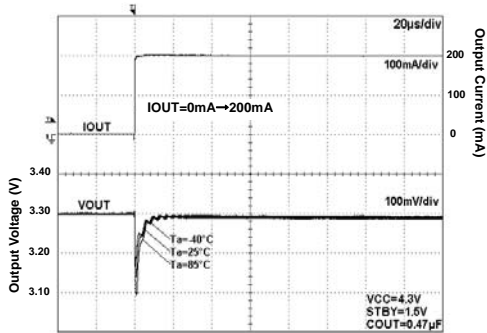
**Fig 275. Load Response**
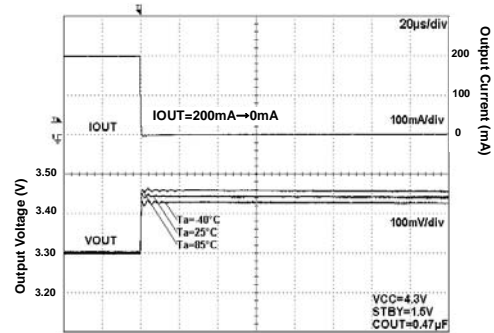
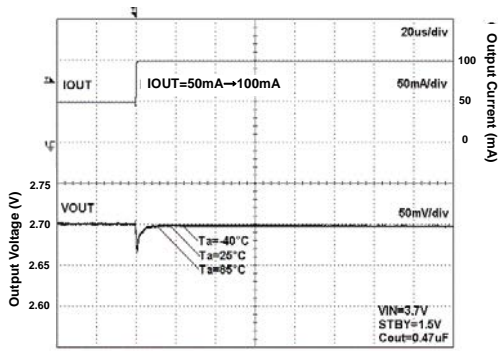**Fig 276. Load Response**
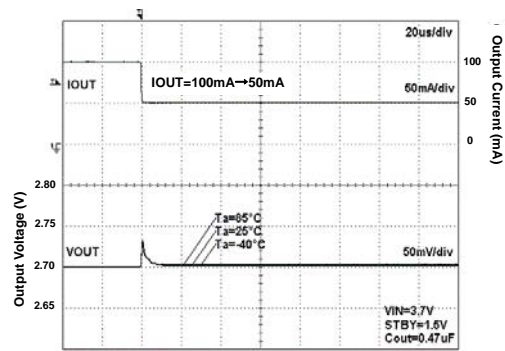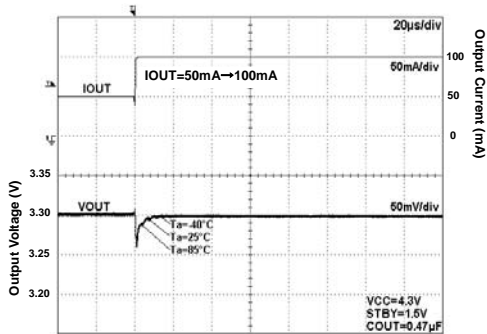
**Fig 277. Load Response**
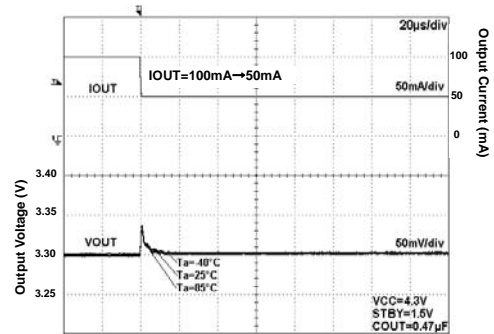
**Fig 278. Load Response**

●Reference data   BU33TD2WNVX   (Ta=25ºC unless otherwise specified.)
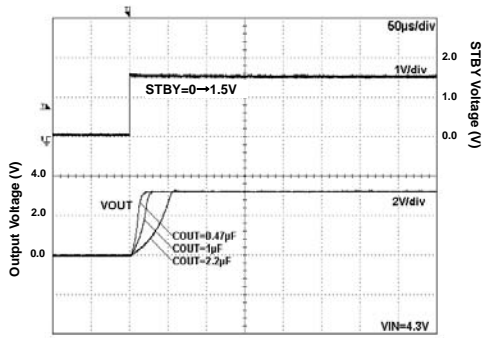


**Fig 279. Start Up Time
Iout=0mA**
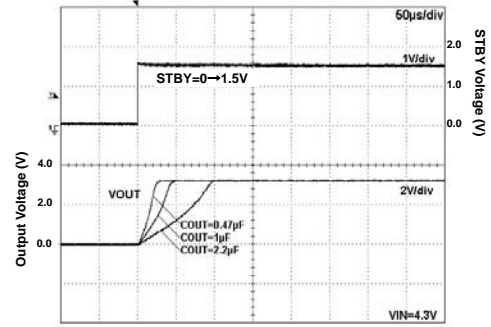


**Fig 280. Start Up Time
Iout=200mA**
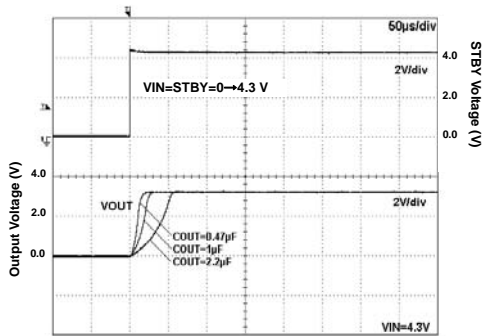


**Fig 281. Start Up Time
(VIN=STBY) Iout=0mA
Iout=0mA**
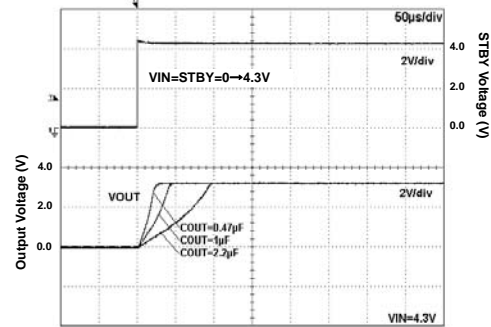


**Fig 282. Start Up Time
(VIN=STBY) Iout=200mA**
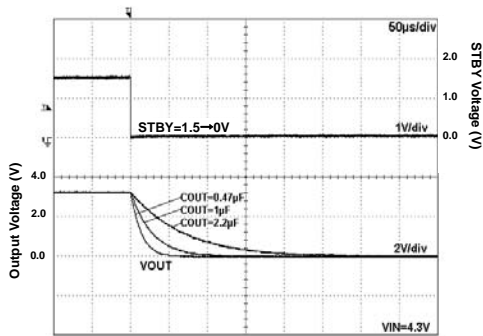


**Fig 283. Discharge Time**
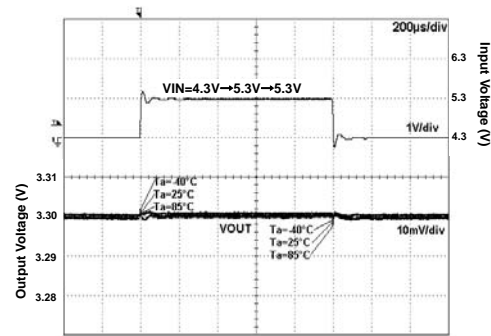


**Fig 284. VIN Response**

● About power dissipation (Pd)

As for power dissipation, an approximate estimate of the heat reduction characteristics and internal power consumption of IC are shown, so please use these for reference. Since power dissipation changes substantially depending on the implementation conditions (board size, board thickness, metal wiring rate, number of layers and through holes, etc.), it is recommended to measure Pd on a set board. Exceeding the power dissipation of IC may lead to deterioration of the original IC performance, such as causing operation of the thermal shutdown circuit or reduction in current capability. Therefore, be sure to prepare sufficient margin within power dissipation for usage.

Calculation of the maximum internal power consumption of IC (PMAX)

**PMAX=(VIN-VOUT)×IOUT(MAX.)** (VIN: Input voltage    VOUT: Output voltage    IOUT(MAX): Maximum output current)

○  Measurement conditions

| | | Standard ROHM Board | Evaluation Board 1 |
|---|---|---|---|
| Layout of Board for Measurement  ⬚ IC Implementation Position | | Top Layer (Top View) / Bottom Layer (Top View) | Top Layer (Top View) / Bottom Layer (Top View) |
| Measurement State | | With board implemented (Wind speed 0 m/s) | With board implemented (Wind speed 0 m/s) |
| Board Material | | Glass epoxy resin (Double-side board) | Glass epoxy resin (Double-side board) |
| Board Size | | 70 mm x 70 mm x 1.6 mm | 40 mm x 40 mm x 1.6 mm |
| Wiring Rate | Top layer | Metal (GND) wiring rate: Approx. 0% | Metal (GND) wiring rate: Approx. 50% |
| | Bottom layer | Metal (GND) wiring rate: Approx. 50% | Metal (GND) wiring rate: Approx. 50% |
| Through Hole | | Diameter 0.5mm x 6 holes | Diameter 0.5mm x 25 holes |
| Power Dissipation | | 0.56W | 0.39W |
| Thermal Resistance | | θja=178.6°C/W | θja=256.4°C/W |

* Please design the margin so that PMAX becomes is than Pd (PMAX<Pd) within the usage temperature range

Fig. 285   SSON004X1010   Power dissipation heat reduction characteristics (Reference)

●Operation Notes

1.) <u>Absolute maximum ratings</u>

Use of the IC in excess of absolute maximum ratings (such as the input voltage or operating temperature range) may result in damage to the IC. Assumptions should not be made regarding the state of the IC (e.g., short mode or open mode) when such damage is suffered. If operational values are expected to exceed the maximum ratings for the device, consider adding protective circuitry (such as fuses) to eliminate the risk of damaging the IC.

2.) <u>GND potential</u>

The potential of the GND pin must be the minimum potential in the system in all operating conditions.
Never connect a potential lower than GND to any pin, even if only transiently.

3.) <u>Thermal design</u>

Use a thermal design that allows for a sufficient margin for that package power dissipation rating (Pd) under actual operating conditions.

4.) <u>Inter-pin shorts and mounting errors</u>

Use caution when orienting and positioning the IC for mounting on printed circuit boards. Improper mounting or shorts between pins may result in damage to the IC.

5.) <u>Operation in strong electromagnetic fields</u>

Strong electromagnetic fields may cause the IC to malfunction. Caution should be exercised in applications where strong electromagnetic fields may be present.

6.) <u>Common impedance</u>

Wiring traces should be as short and wide as possible to minimize common impedance. Bypass capacitors should be use to keep ripple to a minimum.

7.) <u>Voltage of STBY pin</u>

To enable standby mode for all channels, set the STBY pin to 0.3 V or less, and for normal operation, to 1.2 V or more. Setting STBY to a voltage between 0.3 and 1.2 V may cause malfunction and should be avoided. Keep transition time between high and low (or vice versa) to a minimum.

Additionally, if STBY is shorted to VIN, the IC will switch to standby mode and disable the output discharge circuit, causing a temporary voltage to remain on the output pin. If the IC is switched on again while this voltage is present, overshoot may occur on the output. Therefore, in applications where these pins are shorted, the output should always be completely discharged before turning the IC on.

8.) <u>Over-current protection circuit (OCP)</u>

This IC features an integrated over-current and short-protection circuitry on the output to prevent destruction of the IC when the output is shorted. The OCP circuitry is designed only to protect the IC from irregular conditions (such as motor output shorts) and is not designed to be used as an active security device for the application. Therefore, applications should not be designed under the assumption that this circuitry will engage.

9.) <u>Thermal shutdown circuit (TSD)</u>

This IC also features a thermal shutdown circuit that is designed to turn the output off when the junction temperature of the IC exceeds about 150℃. This feature is intended to protect the IC only in the event of thermal overload and is not designed to guarantee operation or act as an active security device for the application. Therefore, applications should not be designed under the assumption that this circuitry will engage.

10.) <u>Input/output capacitor</u>

Capacitors must be connected between the input/output pins and GND for stable operation, and should be physically mounted as close to the IC pins as possible. The input capacitor helps to counteract increases in power supply impedance, and increases stability in applications with long or winding power supply traces. The output capacitance value is directly related to the overall stability and transient response of the regulator, and should be set to the largest possible for the application to increase these characteristics. During design, keep in mind that in general, ceramic capacitors have a wide range of tolerances, temperature coefficients and DC bias characteristics, and that their capacitance values tend to decrease over time. Confirm these details before choosing appropriate capacitors for your application. (Please refer the technical note, regarding ceramic capacitor of recommendation)

11.) <u>About the equivalent series resistance (ESR) of a ceramic capacitor</u>

Capacitors generally have ESR (equivalent series resistance) and it operates stably in the ESR-IOUT area shown on the right. Since ceramic capacitors, tantalum capacitors, electrolytic capacitors, etc. generally have different ESR, please check the ESR of the capacitor to be used and use it within the stability area range shown in the right graph for evaluation of the actual application.

Cout=0.47μF, Cin=0.47μF, Temp=+25℃
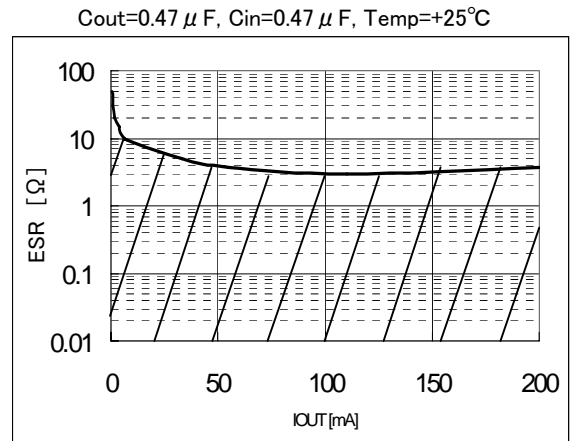


Fig. 286 Stable region (example)

●Revision History

| Date | Revision | Changes |
|------|----------|---------|
| 7.Feb.2013 | 001 | New Release. |
| 15.Mar.2013 | 002 | Adding Reference data.<br>Adding a Revision History. |
| 24.Apr.2013 | 003 | Adding 1.3V product. |
| 31.Jul.2013 | 004 | Adding dropout voltage.<br>Delete ELECTRICAL CHARACTERISTICS of each Output Voltage.<br>VSBYH is changed. |
| 21.Aug.2013 | 005 | Adding dropout voltage. |
| 28.Aug.2013 | 006 | Ordering Information is changed. |
| 24.Oct.2013 | 007 | Adding Pin Descriptions.<br>Adding BOTTOM VIEW. |
| 14.Jan.2014 | 008 | Adding 1.1V product |

# Notice

**Precaution on using ROHM Products**

1. Our Products are designed and manufactured for application in ordinary electronic equipments (such as AV equipment, OA equipment, telecommunication equipment, home electronic appliances, amusement equipment, etc.). If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment [(Note 1)], transport equipment, traffic equipment, aircraft/spacecraft, nuclear power controllers, fuel controllers, car equipment including car accessories, safety devices, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

(Note1) Medical Equipment Classification of the Specific Applications

| JAPAN | USA | EU | CHINA |
|---|---|---|---|
| CLASSIII | CLASSIII | CLASSIIb | CLASSIII |
| CLASSIV | | CLASSIII | |

2. ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
   [a] Installation of protection circuits or other protective devices to improve system safety
   [b] Installation of redundant circuits to reduce the impact of single or multiple circuit failure

3. Our Products are designed and manufactured for use under standard conditions and not under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc, prior to use, must be necessary:
   [a] Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
   [b] Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
   [c] Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including $Cl_2$, $H_2S$, $NH_3$, $SO_2$, and $NO_2$
   [d] Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
   [e] Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
   [f] Sealing or coating our Products with resin or other coating materials
   [g] Use of our Products without cleaning residue of flux (even if you use no-clean type fluxes, cleaning residue of flux is recommended); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
   [h] Use of the Products in places subject to dew condensation

4. The Products are not subject to radiation-proof design.

5. Please verify and confirm characteristics of the final or mounted products in using the Products.

6. In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse. is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.

7. De-rate Power Dissipation (Pd) depending on Ambient temperature (Ta). When used in sealed area, confirm the actual ambient temperature.

8. Confirm that operation temperature is within the specified range described in the product specification.

9. ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

**Precaution for Mounting / Circuit board design**

1. When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.

2. In principle, the reflow soldering method must be used; if flow soldering method is preferred, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

## Precautions Regarding Application Examples and External Circuits

1.  If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.

2.  You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

## Precaution for Electrostatic

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of Ionizer, friction prevention and temperature / humidity control).

## Precaution for Storage / Transportation

1.  Product performance and soldered connections may deteriorate if the Products are stored in the places where:
    [a]  the Products are exposed to sea winds or corrosive gases, including Cl2, H2S, NH3, SO2, and NO2
    [b]  the temperature or humidity exceeds those recommended by ROHM
    [c]  the Products are exposed to direct sunshine or condensation
    [d]  the Products are exposed to high Electrostatic

2.  Even under ROHM recommended storage condition, solderability of products out of recommended storage time period may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is exceeding the recommended storage time period.

3.  Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.

4.  Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

## Precaution for Product Label

QR code printed on ROHM Products label is for ROHM's internal use only.

## Precaution for Disposition

When disposing Products please dispose them properly using an authorized industry waste company.

## Precaution for Foreign Exchange and Foreign Trade act

Since our Products might fall under controlled goods prescribed by the applicable foreign exchange and foreign trade act, please consult with ROHM representative in case of export.

## Precaution Regarding Intellectual Property Rights

1.  All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data. ROHM shall not be in any way responsible or liable for infringement of any intellectual property rights or other damages arising from use of such information or data.:

2.  No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the information contained in this document.

## Other Precaution

1.  This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.

2.  The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.

3.  In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.

4.  The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.

**General Precaution**

1. Before you use our Pro ducts, you are requested to care fully read this document and fully understand its contents. ROHM shall n ot be in an y way responsible or liabl e for fa ilure, malfunction or acci dent arising from the use of a ny ROHM's Products against warning, caution or note contained in this document.

2. All information contained in this docume nt is current as of the issuing date and subj ect to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the la test information with a ROHM sale s representative.

3. The information contained in this doc ument is provi ded on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate an d/or error-free. ROHM shall not be in an y way responsible or liable for an y damages, expenses or losses incurred by you or third parties resulting from inaccur acy or errors of or concerning such information.