

BOARD CHARACTERISTICS

Copper Layer Count:4

Board Thickness:1.6000 mm

Board overall dimensions:89.2376 mm x 113.8915 mm

Min track/spacing:0.1000 mm / 0.1000 mm

Min hole diameter:0.1500 mm


Copper Finish:HAL lead-free

Impedance Control:No

Castellated pads:No

Plated Board Edge:No

Edge card connectors:No

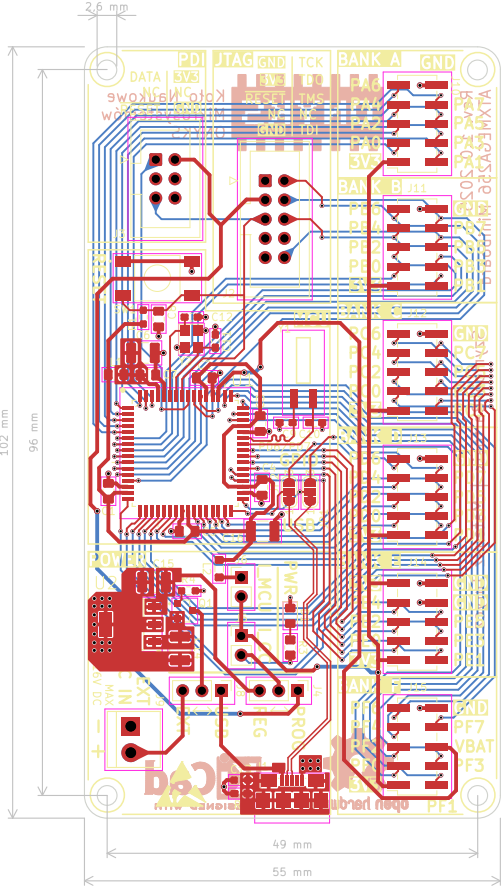

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.01 mm	Black	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.1 mm	FR4 natural	4.5	0.02
In1.Cu	copper		0.035 mm		1	0
Dielectric 2	core	FR4	1.24 mm	FR4 natural	4.5	0.02
In2.Cu	copper		0.035 mm		1	0
Dielectric 3	prepreg	FR4	0.1 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.01 mm	Black	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	White	1	0

Wszystkie warstwy wewnętrzne są polami masy.



Szymon Bartosik, Mateusz Turycz
Koło Naukowe Mikrosystemów ONYKS

Sheet:
File: ATXMEGA256_Miniboard.kicad_pcb

Title: ATXMEGA256 Miniboard

Size: A4 Date: 2025-07-02
KiCad E.D.A. 9.99.0-2389-g3eb66e1b3d

Rev: 1.0
Id: 1/1