
STM32
CubeMX

# 1. Description

## 1.1. Project

| | |
|---|---|
| Project Name | ProyectoAutoMicro2025 |
| Board Name | custom |
| Generated with: | STM32CubeMX 6.17.0 |
| Date | 05/23/2026 |


## 1.2. MCU

| | |
|---|---|
| MCU Series | STM32F1 |
| MCU Line | STM32F103 |
| MCU name | STM32F103C8Tx |
| MCU Package | LQFP48 |
| MCU Pin number | 48 |

## 1.3. Core(s) information

| | |
|---|---|
| Core(s) | Arm Cortex-M3 |

## 2. Pinout Configuration

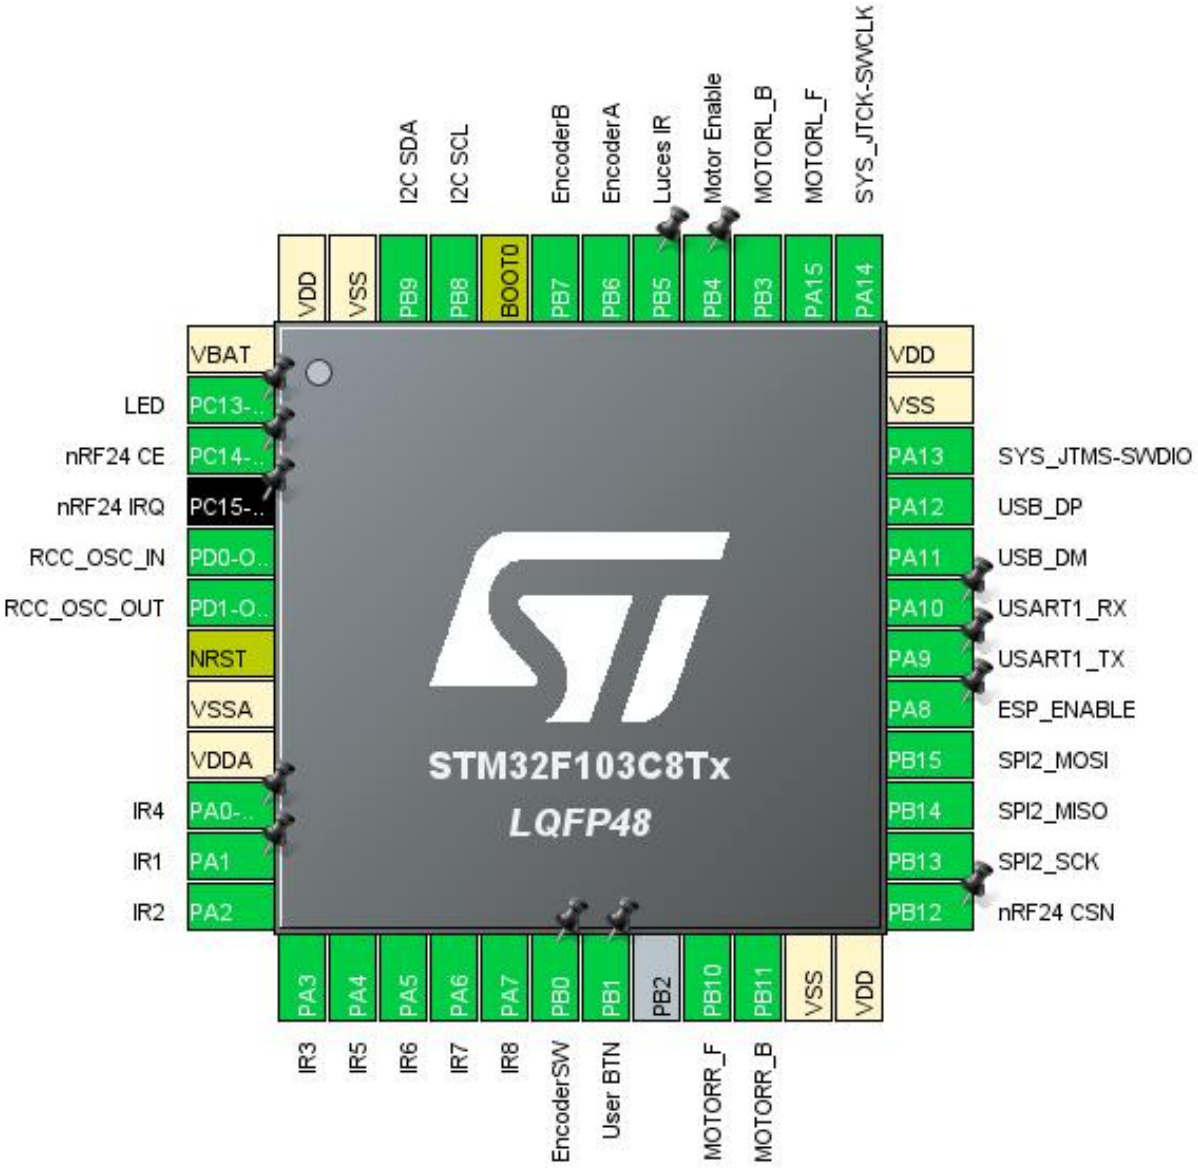

# 3. Pins Configuration


| Pin Number LQFP48 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|---|---|---|---|---|
| 1 | VBAT | Power | | |
| 2 | PC13-TAMPER-RTC * | I/O | GPIO_Output | LED |
| 3 | PC14-OSC32_IN * | I/O | GPIO_Output | nRF24 CE |
| 4 | PC15-OSC32_OUT * | I/O | GPIO_Input | nRF24 IRQ |
| 5 | PD0-OSC_IN | I/O | RCC_OSC_IN | |
| 6 | PD1-OSC_OUT | I/O | RCC_OSC_OUT | |
| 7 | NRST | Reset | | |
| 8 | VSSA | Power | | |
| 9 | VDDA | Power | | |
| 10 | PA0-WKUP | I/O | ADC1_IN0 | IR4 |
| 11 | PA1 | I/O | ADC1_IN1 | IR1 |
| 12 | PA2 | I/O | ADC1_IN2 | IR2 |
| 13 | PA3 | I/O | ADC1_IN3 | IR3 |
| 14 | PA4 | I/O | ADC1_IN4 | IR5 |
| 15 | PA5 | I/O | ADC1_IN5 | IR6 |
| 16 | PA6 | I/O | ADC1_IN6 | IR7 |
| 17 | PA7 | I/O | ADC1_IN7 | IR8 |
| 18 | PB0 * | I/O | GPIO_Input | EncoderSW |
| 19 | PB1 * | I/O | GPIO_Input | User BTN |
| 21 | PB10 | I/O | TIM2_CH3 | MOTORR_F |
| 22 | PB11 | I/O | TIM2_CH4 | MOTORR_B |
| 23 | VSS | Power | | |
| 24 | VDD | Power | | |
| 25 | PB12 * | I/O | GPIO_Output | nRF24 CSN |
| 26 | PB13 | I/O | SPI2_SCK | |
| 27 | PB14 | I/O | SPI2_MISO | |
| 28 | PB15 | I/O | SPI2_MOSI | |
| 29 | PA8 * | I/O | GPIO_Output | ESP_ENABLE |
| 30 | PA9 | I/O | USART1_TX | |
| 31 | PA10 | I/O | USART1_RX | |
| 32 | PA11 | I/O | USB_DM | |
| 33 | PA12 | I/O | USB_DP | |
| 34 | PA13 | I/O | SYS_JTMS-SWDIO | |
| 35 | VSS | Power | | |
| 36 | VDD | Power | | |
| 37 | PA14 | I/O | SYS_JTCK-SWCLK | |

| Pin Number LQFP48 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|---|---|---|---|---|
| 38 | PA15 | I/O | TIM2_CH1 | MOTORL_F |
| 39 | PB3 | I/O | TIM2_CH2 | MOTORL_B |
| 40 | PB4 * | I/O | GPIO_Output | Motor Enable |
| 41 | PB5 * | I/O | GPIO_Output | Luces IR |
| 42 | PB6 | I/O | TIM4_CH1 | EncoderA |
| 43 | PB7 | I/O | TIM4_CH2 | EncoderB |
| 44 | BOOT0 | Boot | | |
| 45 | PB8 | I/O | I2C1_SCL | I2C SCL |
| 46 | PB9 | I/O | I2C1_SDA | I2C SDA |
| 47 | VSS | Power | | |
| 48 | VDD | Power | | |

* The pin is affected with an I/O function

# 4. Clock Tree Configuration

RIF configuration not available for STM32F103C8Tx

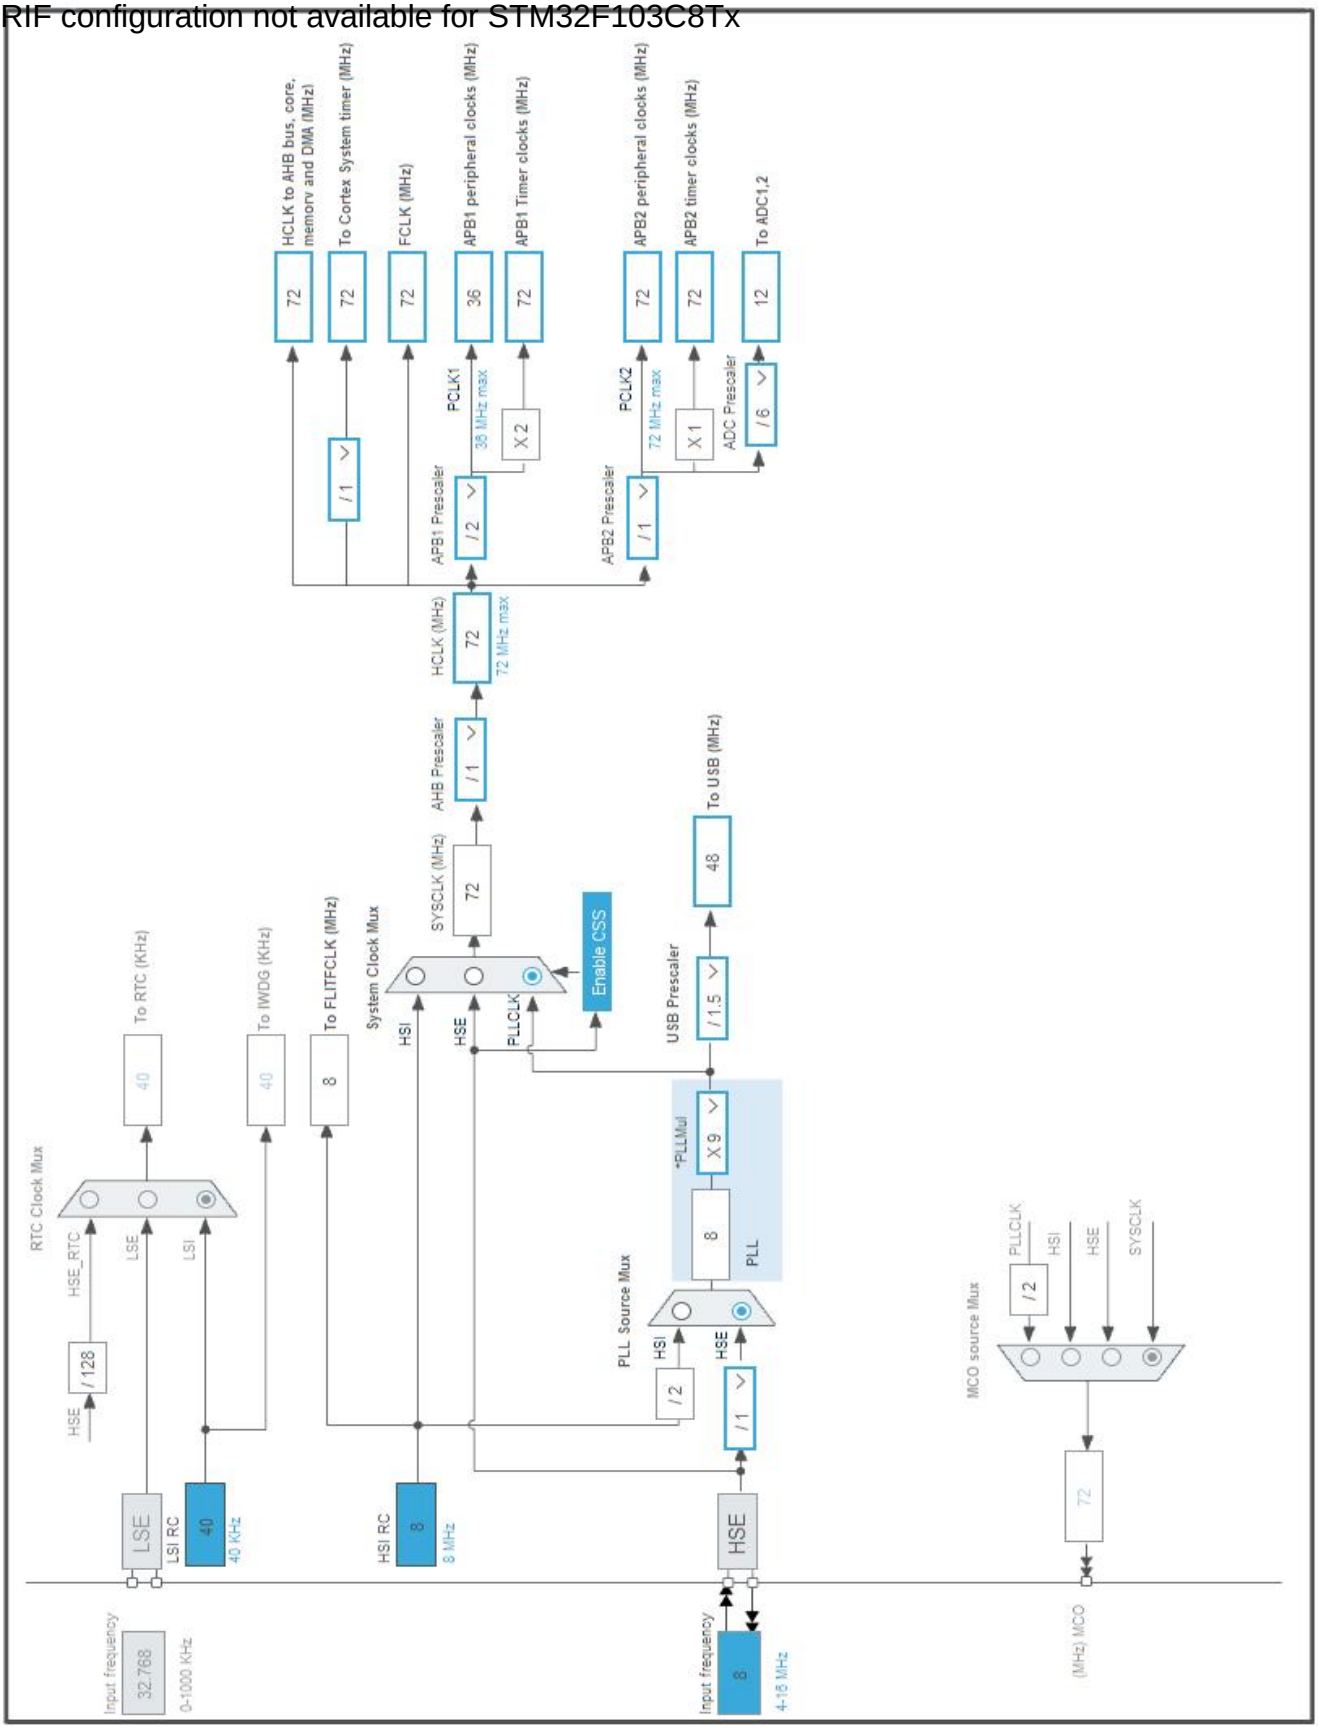

# 1. Power Consumption Calculator report

## 1.1. Microcontroller Selection

| | |
|---|---|
| Series | STM32F1 |
| Line | STM32F103 |
| MCU | STM32F103C8Tx |
| Datasheet | DS5319_Rev17 |

## 1.2. Parameter Selection

| | |
|---|---|
| Temperature | 25 |
| Vdd | 3.3 |

## 1.3. Battery Selection

| | |
|---|---|
| Battery | Li-SOCL2(A3400) |
| Capacity | 3400.0 mAh |
| Self Discharge | 0.08 %/month |
| Nominal Voltage | 3.6 V |
| Max Cont Current | 100.0 mA |
| Max Pulse Current | 200.0 mA |
| Cells in series | 1 |
| Cells in parallel | 1 |


## 1.4. Sequence

| ***Step*** | Step1 | Step2 |
|---|---|---|
| ***Mode*** | RUN | STOP |
| ***Vdd*** | 3.3 | 3.3 |
| ***Voltage Source*** | Battery | Battery |
| ***Range*** | No Scale | No Scale |
| ***Fetch Type*** | FLASH | n/a |
| ***CPU Frequency*** | 72 MHz | 0 Hz |
| ***Clock Configuration*** | HSE PLL | Regulator_LP |
| ***Clock Source Frequency*** | 8 MHz | 0 Hz |
| ***Peripherals*** | | |
| ***Additional Cons.*** | 0 mA | 0 mA |
| ***Average Current*** | 27 mA | 14 µA |
| ***Duration*** | 0.1 ms | 0.9 ms |
| ***DMIPS*** | 90.0 | 0.0 |
| ***Ta Max*** | 100.1 | 105 |
| ***Category*** | In DS Table | In DS Table |

## 1.5. Results

| Sequence Time | 1 ms | Average Current | 2.71 mA |
|---|---|---|---|
| Battery Life | 1 month, 21 days, 17 hours | Average DMIPS | 61.0 DMIPS |

## 1.6. Chart

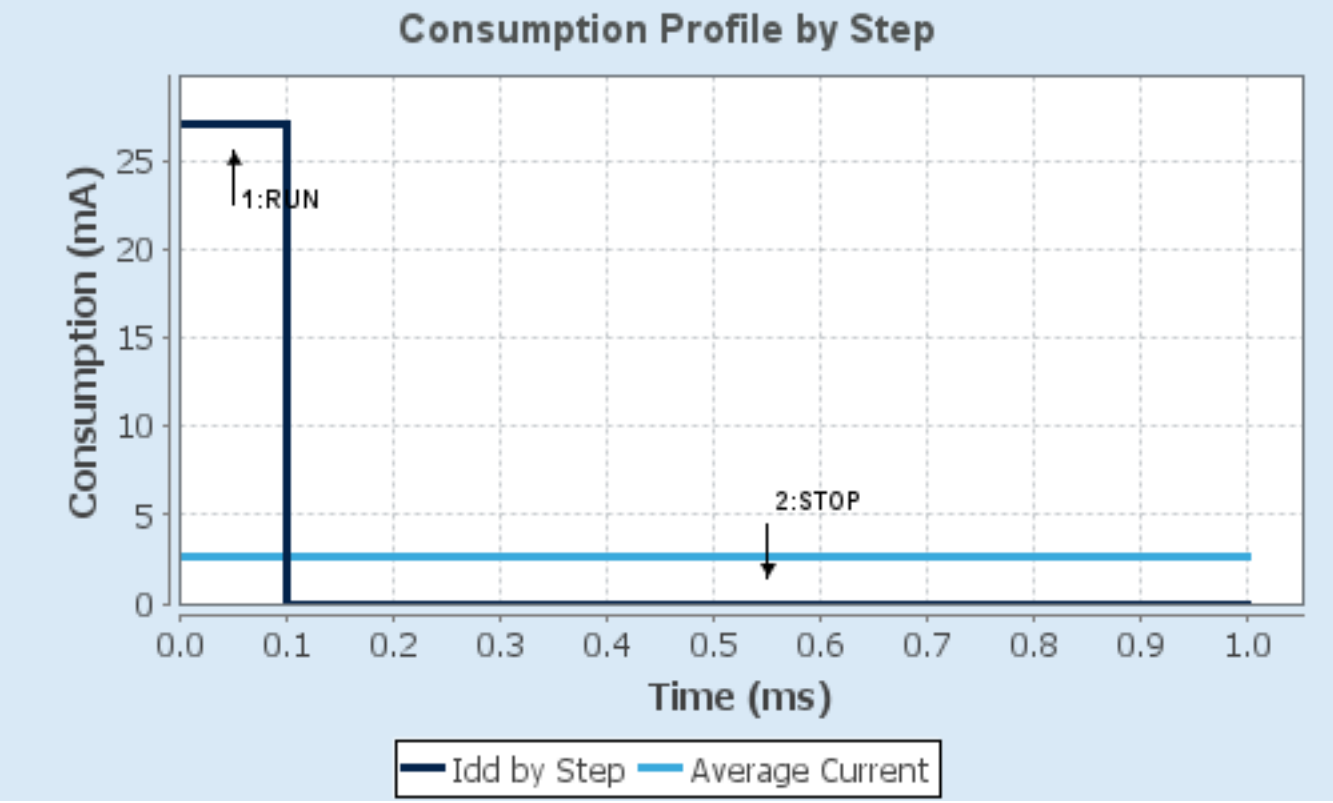
Consumption Profile by Step
Consumption (mA)
25
20
15
10
5
0
1:RUN
2:STOP
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
Time (ms)
Idd by Step
Average Current

# 2. Software Project

## 2.1. Project Settings

| Name | Value |
|---|---|
| Project Name | ProyectoAutoMicro2025 |
| Project Folder | C:\Users\kobac\OneDrive\Escritorio\Facultad\Microcontroladores\Auto |
| Toolchain / IDE | STM32CubeIDE |
| Firmware Package Name and Version | STM32Cube FW_F1 V1.8.7 |
| Application Structure | Advanced |
| Generate Under Root | Yes |
| Do not generate the main() | No |
| Minimum Heap Size | 0x200 |
| Minimum Stack Size | 0x400 |

## 2.2. Code Generation Settings

| Name | Value |
|---|---|
| STM32Cube MCU packages and embedded software | Add necessary library files as reference in the toolchain project configuration file |
| Generate peripheral initialization as a pair of '.c/.h' files | Yes |
| Backup previously generated files when re-generating | No |
| Keep User Code when re-generating | Yes |
| Delete previously generated files when not re-generated | Yes |
| Set all free pins as analog (to optimize the power consumption) | No |
| Enable Full Assert | No |

## 2.3. Advanced Settings - Generated Function Calls

| Rank | Function Name | Peripheral Instance Name |
|---|---|---|
| 1 | SystemClock_Config | RCC |
| 2 | MX_GPIO_Init | GPIO |
| 3 | MX_DMA_Init | DMA |
| 4 | MX_TIM3_Init | TIM3 |
| 5 | MX_ADC1_Init | ADC1 |
| 6 | MX_USART1_UART_Init | USART1 |
| 7 | MX_I2C1_Init | I2C1 |
| 8 | MX_TIM2_Init | TIM2 |
| 9 | MX_SPI2_Init | SPI2 |
| 10 | MX_TIM4_Init | TIM4 |
| 11 | MX_USB_PCD_Init | USB |

# 3. Peripherals and Middlewares Configuration

## 3.1. ADC1

**mode: IN0**

**mode: IN1**

**mode: IN2**

**mode: IN3**

**mode: IN4**

**mode: IN5**

**mode: IN6**

**mode: IN7**

### 3.1.1. Parameter Settings:

| | |
|---|---|
| **ADCs_Common_Settings:** | |
| Mode | Independent mode |
| **ADC_Settings:** | |
| Data Alignment | Right alignment |
| Scan Conversion Mode | Enabled |
| Continuous Conversion Mode | Disabled |
| Discontinuous Conversion Mode | Disabled |
| **ADC_Regular_ConversionMode:** | |
| Enable Regular Conversions | Enable |
| Number Of Conversion | **8 *** |
| External Trigger Conversion Source | **Timer 3 Trigger Out event *** |
| Rank | 1 |
| Channel | **Channel 1 *** |
| Sampling Time | **28.5 Cycles *** |
| Rank | **2 *** |
| Channel | **Channel 2 *** |
| Sampling Time | **28.5 Cycles *** |
| Rank | **3 *** |
| Channel | **Channel 3 *** |
| Sampling Time | **28.5 Cycles *** |
| Rank | **4 *** |
| Channel | Channel 0 |
| Sampling Time | **28.5 Cycles *** |
| Rank | **5 *** |
| Channel | **Channel 4 *** |

| | |
|---|---|
| Sampling Time | **28.5 Cycles *** |
| Rank | **6 *** |
| Channel | **Channel 5 *** |
| Sampling Time | **28.5 Cycles *** |
| Rank | **7 *** |
| Channel | **Channel 6 *** |
| Sampling Time | **28.5 Cycles *** |
| Rank | **8 *** |
| Channel | **Channel 7 *** |
| Sampling Time | **28.5 Cycles *** |

**ADC_Injected_ConversionMode:**

| | |
|---|---|
| Enable Injected Conversions | Disable |

**WatchDog:**

| | |
|---|---|
| Enable Analog WatchDog Mode | false |

## 3.2. I2C1

## I2C: I2C

### 3.2.1. Parameter Settings:

**Master Features:**

| | |
|---|---|
| I2C Speed Mode | **Fast Mode *** |
| I2C Clock Speed (Hz) | 400000 |
| Fast Mode Duty Cycle | Duty cycle Tlow/Thigh = 2 |

**Slave Features:**

| | |
|---|---|
| Clock No Stretch Mode | Disabled |
| Primary Address Length selection | 7-bit |
| Dual Address Acknowledged | Disabled |
| Primary slave address | 0 |
| General Call address detection | Disabled |

## 3.3. RCC

## High Speed Clock (HSE): Crystal/Ceramic Resonator

### 3.3.1. Parameter Settings:

**System Parameters:**

| | |
|---|---|
| VDD voltage (V) | 3.3 |
| Prefetch Buffer | Enabled |
| Flash Latency(WS) | 2 WS (3 CPU cycle) |

**RCC Parameters:**

| | |
|---|---|
| HSI Calibration Value | 16 |
| HSE Startup Timout Value (ms) | 100 |
| LSE Startup Timout Value (ms) | 5000 |

## 3.4. SPI2

## Mode: Full-Duplex Master

### 3.4.1. Parameter Settings:

**Basic Parameters:**

| | |
|---|---|
| Frame Format | Motorola |
| Data Size | 8 Bits |
| First Bit | MSB First |

**Clock Parameters:**

| | |
|---|---|
| Prescaler (for Baud Rate) | 2 |
| Baud Rate | **18.0 MBits/s *** |
| Clock Polarity (CPOL) | Low |
| Clock Phase (CPHA) | 1 Edge |

**Advanced Parameters:**

| | |
|---|---|
| CRC Calculation | Disabled |
| NSS Signal Type | Software |

## 3.5. SYS

## Debug: Serial Wire

## Timebase Source: SysTick

## 3.6. TIM2

## Clock Source : Internal Clock

## Channel1: PWM Generation CH1

## Channel2: PWM Generation CH2

## Channel3: PWM Generation CH3

## Channel4: PWM Generation CH4

### 3.6.1. Parameter Settings:

**Counter Settings:**

| | |
|---|---|
| Prescaler (PSC - 16 bits value) | **2812 *** |
| Counter Mode | Up |
| Counter Period (AutoReload Register - 16 bits value ) | **255 *** |
| Internal Clock Division (CKD) | No Division |
| auto-reload preload | Disable |

**Trigger Output (TRGO) Parameters:**

| | |
|---|---|
| Master/Slave Mode (MSM bit) | Disable (Trigger input effect not delayed) |
| Trigger Event Selection | Reset (UG bit from TIMx_EGR) |

**PWM Generation Channel 1:**

| | |
|---|---|
| Mode | PWM mode 1 |
| Pulse (16 bits value) | 0 |
| Output compare preload | Enable |
| Fast Mode | Disable |
| CH Polarity | High |

**PWM Generation Channel 2:**

| | |
|---|---|
| Mode | PWM mode 1 |
| Pulse (16 bits value) | 0 |
| Output compare preload | Enable |
| Fast Mode | Disable |
| CH Polarity | High |

**PWM Generation Channel 3:**

| | |
|---|---|
| Mode | PWM mode 1 |
| Pulse (16 bits value) | 0 |
| Output compare preload | Enable |
| Fast Mode | Disable |
| CH Polarity | High |

**PWM Generation Channel 4:**

| | |
|---|---|
| Mode | PWM mode 1 |
| Pulse (16 bits value) | 0 |
| Output compare preload | Enable |
| Fast Mode | Disable |
| CH Polarity | High |

## 3.7. TIM3

## mode: Clock Source

### 3.7.1. Parameter Settings:

**Counter Settings:**

| | |
|---|---|
| Prescaler (PSC - 16 bits value) | **71 *** |
| Counter Mode | Up |
| Counter Period (AutoReload Register - 16 bits value ) | **249 *** |
| Internal Clock Division (CKD) | No Division |
| auto-reload preload | Disable |

**Trigger Output (TRGO) Parameters:**

| | |
|---|---|
| Master/Slave Mode (MSM bit) | Disable (Trigger input effect not delayed) |
| Trigger Event Selection | **Update Event *** |

## 3.8. TIM4

## Combined Channels: Encoder Mode

### 3.8.1. Parameter Settings:

**Counter Settings:**

| | |
|---|---|
| Prescaler (PSC - 16 bits value) | 0 |
| Counter Mode | Up |
| Counter Period (AutoReload Register - 16 bits value ) | 65535 |
| Internal Clock Division (CKD) | No Division |
| auto-reload preload | Disable |

**Trigger Output (TRGO) Parameters:**

| | |
|---|---|
| Master/Slave Mode (MSM bit) | Disable (Trigger input effect not delayed) |
| Trigger Event Selection | Reset (UG bit from TIMx_EGR) |

**Encoder:**

| | |
|---|---|
| Encoder Mode | **Encoder Mode TI1 and TI2 *** |
| ____ Parameters for Channel 1 ____ | |
| Polarity | Rising Edge |
| IC Selection | Direct |
| Prescaler Division Ratio | No division |
| Input Filter | 0 |
| ____ Parameters for Channel 2 ____ | |
| Polarity | Rising Edge |
| IC Selection | Direct |
| Prescaler Division Ratio | No division |
| Input Filter | **9 *** |

## 3.9. USART1

## Mode: Asynchronous

### 3.9.1. Parameter Settings:

**Basic Parameters:**

| | |
|---|---|
| Baud Rate | 115200 |
| Word Length | 8 Bits (including Parity) |
| Parity | None |
| Stop Bits | 1 |

**Advanced Parameters:**

| | |
|---|---|
| Data Direction | Receive and Transmit |
| Over Sampling | 16 Samples |

## 3.10. USB

## mode: Device (FS)

### 3.10.1. Parameter Settings:

**Basic Parameters:**

| | |
|---|---|
| Speed | Full Speed 12MBit/s |

**Power Parameters:**

| | |
|---|---|
| Low Power | Disabled |
| Link Power Management | Disabled |
| Battery Charging | Disabled |

*** User modified value**

# 4. System Configuration

## 4.1. GPIO configuration

| IP | Pin | Signal | GPIO mode | GPIO pull/up pull down | Max Speed | User Label |
|---|---|---|---|---|---|---|
| ADC1 | PA0-WKUP | ADC1_IN0 | Analog mode | n/a | n/a | IR4 |
| | PA1 | ADC1_IN1 | Analog mode | n/a | n/a | IR1 |
| | PA2 | ADC1_IN2 | Analog mode | n/a | n/a | IR2 |
| | PA3 | ADC1_IN3 | Analog mode | n/a | n/a | IR3 |
| | PA4 | ADC1_IN4 | Analog mode | n/a | n/a | IR5 |
| | PA5 | ADC1_IN5 | Analog mode | n/a | n/a | IR6 |
| | PA6 | ADC1_IN6 | Analog mode | n/a | n/a | IR7 |
| | PA7 | ADC1_IN7 | Analog mode | n/a | n/a | IR8 |
| I2C1 | PB8 | I2C1_SCL | Alternate Function Open Drain | n/a | **High *** | I2C SCL |
| | PB9 | I2C1_SDA | Alternate Function Open Drain | n/a | **High *** | I2C SDA |
| RCC | PD0-OSC_IN | RCC_OSC_IN | n/a | n/a | n/a | |
| | PD1-OSC_OUT | RCC_OSC_OUT | n/a | n/a | n/a | |
| SPI2 | PB13 | SPI2_SCK | Alternate Function Push Pull | n/a | **High *** | |
| | PB14 | SPI2_MISO | Input mode | No pull-up and no pull-down | **n/a** | |
| | PB15 | SPI2_MOSI | Alternate Function Push Pull | n/a | **High *** | |
| SYS | PA13 | SYS_JTMS-SWDIO | n/a | n/a | n/a | |
| | PA14 | SYS_JTCK-SWCLK | n/a | n/a | n/a | |
| TIM2 | PB10 | TIM2_CH3 | Alternate Function Push Pull | n/a | Low | MOTORR_F |
| | PB11 | TIM2_CH4 | Alternate Function Push Pull | n/a | Low | MOTORR_B |
| | PA15 | TIM2_CH1 | Alternate Function Push Pull | n/a | Low | MOTORL_F |
| | PB3 | TIM2_CH2 | Alternate Function Push Pull | n/a | Low | MOTORL_B |
| TIM4 | PB6 | TIM4_CH1 | Input mode | No pull-up and no pull-down | n/a | EncoderA |
| | PB7 | TIM4_CH2 | Input mode | No pull-up and no pull-down | n/a | EncoderB |
| USART1 | PA9 | USART1_TX | Alternate Function Push Pull | n/a | **High *** | |
| | PA10 | USART1_RX | Input mode | No pull-up and no pull-down | **n/a** | |
| USB | PA11 | USB_DM | n/a | n/a | n/a | |
| | PA12 | USB_DP | n/a | n/a | n/a | |
| GPIO | PC13-TAMPER-RTC | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | LED |
| | PC14- | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | nRF24 CE |

| IP | Pin | Signal | GPIO mode | GPIO pull/up pull down | Max Speed | User Label |
|---|---|---|---|---|---|---|
| | OSC32_IN | | | | | |
| | PC15-OSC32_OUT | GPIO_Input | Input mode | No pull-up and no pull-down | n/a | nRF24 IRQ |
| | PB0 | GPIO_Input | Input mode | **Pull-up *** | n/a | EncoderSW |
| | PB1 | GPIO_Input | Input mode | No pull-up and no pull-down | n/a | User BTN |
| | PB12 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | nRF24 CSN |
| | PA8 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | ESP_ENABLE |
| | PB4 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | Motor Enable |
| | PB5 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | Luces IR |

## 4.2. DMA configuration

| DMA request | Stream | Direction | Priority |
|---|---|---|---|
| ADC1 | DMA1_Channel1 | Peripheral To Memory | **High *** |
| USART1_TX | DMA1_Channel4 | Memory To Peripheral | Low |
| USART1_RX | DMA1_Channel5 | Peripheral To Memory | Low |
| I2C1_RX | DMA1_Channel7 | Peripheral To Memory | Low |
| I2C1_TX | DMA1_Channel6 | Memory To Peripheral | Low |

### *ADC1: DMA1_Channel1 DMA request Settings:*

| | |
|---|---|
| Mode: | **Circular *** |
| Peripheral Increment: | Disable |
| Memory Increment: | **Enable *** |
| Peripheral Data Width: | Half Word |
| Memory Data Width: | Half Word |

### *USART1_TX: DMA1_Channel4 DMA request Settings:*

| | |
|---|---|
| Mode: | Normal |
| Peripheral Increment: | Disable |
| Memory Increment: | **Enable *** |
| Peripheral Data Width: | Byte |
| Memory Data Width: | Byte |

### *USART1_RX: DMA1_Channel5 DMA request Settings:*

| | |
|---|---|
| Mode: | **Circular *** |
| Peripheral Increment: | Disable |
| Memory Increment: | **Enable *** |
| Peripheral Data Width: | Byte |
| Memory Data Width: | Byte |

### *I2C1_RX: DMA1_Channel7 DMA request Settings:*

| | |
|---|---|
| Mode: | Normal |
| Peripheral Increment: | Disable |
| Memory Increment: | **Enable *** |

| | |
|---|---|
| Peripheral Data Width: | Byte |
| Memory Data Width: | Byte |

### *I2C1_TX: DMA1_Channel6 DMA request Settings:*

| | |
|---|---|
| Mode: | Normal |
| Peripheral Increment: | Disable |
| Memory Increment: | **Enable *** |
| Peripheral Data Width: | Byte |
| Memory Data Width: | Byte |

## 4.3. NVIC configuration

### 4.3.1. NVIC

| Interrupt Table | Enable | Preenmption Priority | SubPriority |
|---|---|---|---|
| Non maskable interrupt | true | 0 | 0 |
| Hard fault interrupt | true | 0 | 0 |
| Memory management fault | true | 0 | 0 |
| Prefetch fault, memory access fault | true | 0 | 0 |
| Undefined instruction or illegal state | true | 0 | 0 |
| System service call via SWI instruction | true | 0 | 0 |
| Debug monitor | true | 0 | 0 |
| Pendable request for system service | true | 0 | 0 |
| System tick timer | true | 15 | 0 |
| DMA1 channel1 global interrupt | true | 0 | 0 |
| DMA1 channel4 global interrupt | true | 0 | 0 |
| DMA1 channel5 global interrupt | true | 0 | 0 |
| DMA1 channel6 global interrupt | true | 0 | 0 |
| DMA1 channel7 global interrupt | true | 0 | 0 |
| ADC1 and ADC2 global interrupts | true | 0 | 0 |
| TIM3 global interrupt | true | 0 | 0 |
| I2C1 event interrupt | true | 0 | 0 |
| I2C1 error interrupt | true | 0 | 0 |
| USART1 global interrupt | true | 0 | 0 |
| PVD interrupt through EXTI line 16 | unused | | |
| Flash global interrupt | unused | | |
| RCC global interrupt | unused | | |
| USB high priority or CAN TX interrupts | unused | | |
| USB low priority or CAN RX0 interrupts | unused | | |
| TIM2 global interrupt | unused | | |
| TIM4 global interrupt | unused | | |
| SPI2 global interrupt | unused | | |

### 4.3.2. NVIC Code generation

| Enabled interrupt Table | Select for init sequence ordering | Generate IRQ handler | Call HAL handler |
|---|---|---|---|
| Non maskable interrupt | false | true | false |
| Hard fault interrupt | false | true | false |
| Memory management fault | false | true | false |
| Prefetch fault, memory access fault | false | true | false |
| Undefined instruction or illegal state | false | true | false |
| System service call via SWI instruction | false | true | false |
| | | | |


| Enabled interrupt Table | Select for init sequence ordering | Generate IRQ handler | Call HAL handler |
|---|---|---|---|
| Debug monitor | false | true | false |
| Pendable request for system service | false | true | false |
| System tick timer | false | true | true |
| DMA1 channel1 global interrupt | false | true | true |
| DMA1 channel4 global interrupt | false | true | true |
| DMA1 channel5 global interrupt | false | true | true |
| DMA1 channel6 global interrupt | false | true | true |
| DMA1 channel7 global interrupt | false | true | true |
| ADC1 and ADC2 global interrupts | false | true | true |
| TIM3 global interrupt | false | true | true |
| I2C1 event interrupt | false | true | true |
| I2C1 error interrupt | false | true | true |
| USART1 global interrupt | false | true | true |

*** User modified value**

# 5. System Views

5.1. Category view

*5.1.1. Current*

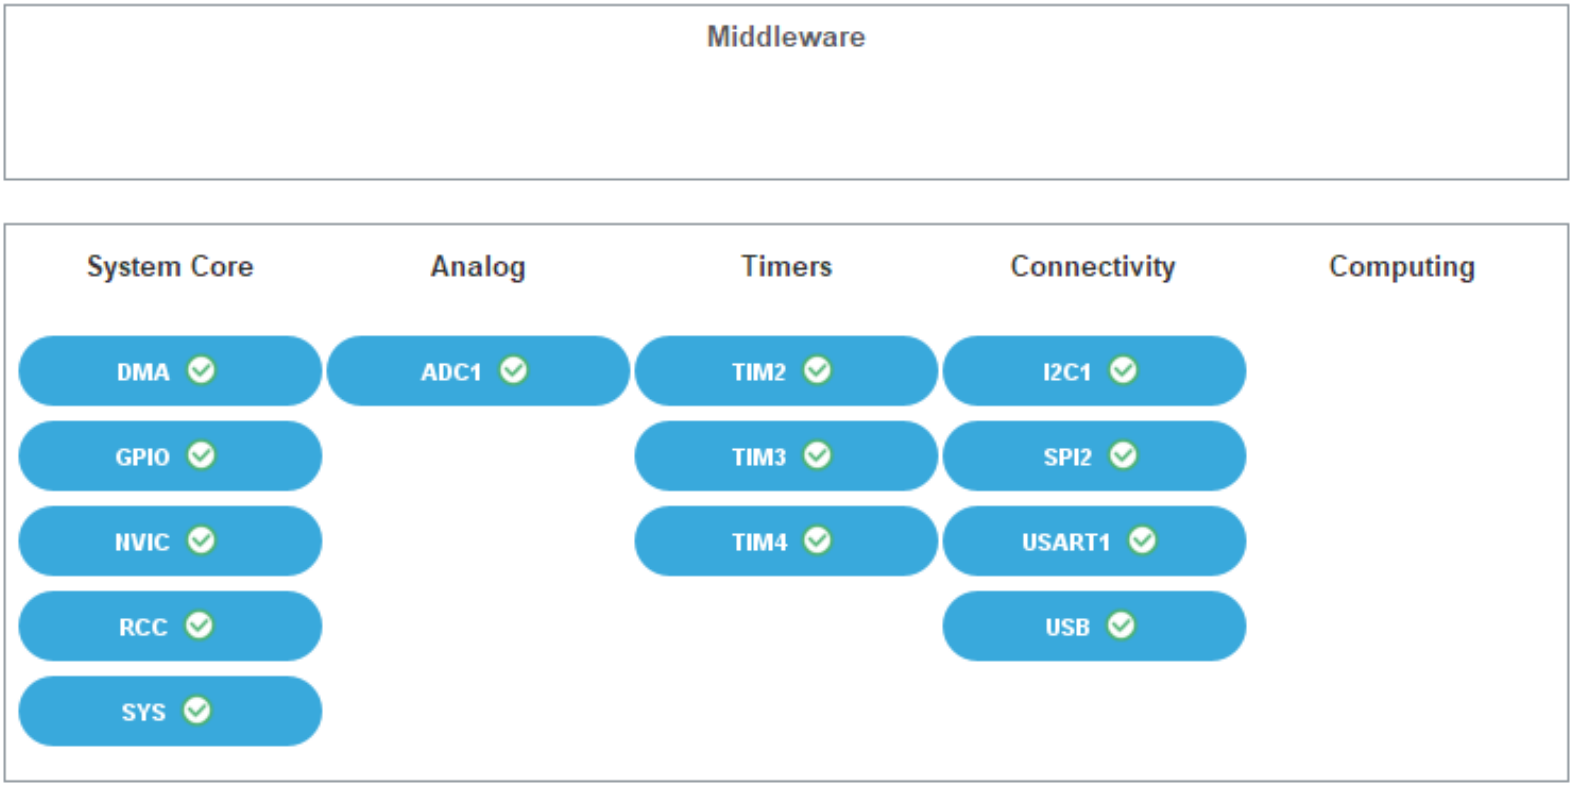

# 6. Docs & Resources

| Type | Link |
|---|---|
| BSDL files | https://www.st.com/resource/en/bsdl_model/stm32f1_bsdl.zip |
| IBIS models | https://www.st.com/resource/en/ibis_model/stm32f1-ibis.zip |
| System View Description | https://www.st.com/resource/en/svd/stm32f1_svd.zip |
| Presentations | https://www.st.com/resource/en/product_presentation/stm32-stm8_embedded_software_solutions.pdf |
| Presentations | https://www.st.com/resource/en/product_presentation/stm32_eval-tools_portfolio.pdf |
| Presentations | https://www.st.com/resource/en/product_presentation/stm32_stm8_functional-safety-packages.pdf |
| Presentations | https://www.st.com/resource/en/product_presentation/stm32-stm8_software_development_tools.pdf |
| Presentations | https://www.st.com/resource/en/product_presentation/microcontrollers-stm32-family-overview.pdf |
| Brochures | https://www.st.com/resource/en/brochure/products-and-solutions-for-plcs-and-smart-i-os.pdf |
| Brochures | https://www.st.com/resource/en/brochure/expansion-boards-for-intelligent-power-switches.pdf |
| Flyers | https://www.st.com/resource/en/flyer/flstm32nucleo.pdf |
| Flyers | https://www.st.com/resource/en/flyer/fldpstpfc11120.pdf |
| Product Certifications | https://www.st.com/resource/en/certification_document/1239988349.pdf |
| Product Certifications | https://www.st.com/resource/en/certification_document/stm32_authentication_can.pdf |
| Security Bulletin | https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an1709-emc-design-guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf |

| | |
|---|---|
| Application Notes | https://www.st.com/resource/en/application_note/an2586-getting-started-with-stm32f10xxx-hardware-development-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an2604-stm32f101xx-and-stm32f103xx-rtc-calibration-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an2945-stm8s-and-stm32-mcus-a-consistent-832bit-product-line-for-painless-migration-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an3070-managing-the-driver-enable-signal-for-rs485-and-iolink-communications-with-the-stm32s-usart-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an3095-stevalisv002v1-stevalisv002v2-3-kw-gridconnected-pv-system-based-on-the-stm32f103xx-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an3108-stlm75-firmware-library-for-the-stm32f10x-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an3126-audio-and-waveform-generation-using-the-dac-in-stm32-products-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an3128-stm32-embedded-graphic-objectstouchscreen-library-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an3155-usart-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an3156-usb-dfu-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an3364-migration-and-compatibility-guidelines-for-stm32-microcontroller-applications-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an3422-migration-of-microcontroller-applications-from-stm32f1-to-stm32l1-series-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an3427-migrating-a-microcontroller-application-from-stm32f1-to-stm32f2-series-stmicroelectronics.pdf |

| | |
|---|---|
| Application Notes | https://www.st.com/resource/en/application_note/an3429-stm32-proprietary-code-protection-overview-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an3961-stevalime003v1-demonstration-board-based-on-the-sthv748-ultrasound-pulser-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4070-250-w-grid-connected-microinverter-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4076-two-or-three-shunt-resistor-based-current-sensing-circuit-design-in-3phase-inverters-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4088-migrating-between-stm32f1-and-stm32f0-series-microcontrollers-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4228-migrating-from-stm32f1-series-to-stm32f3-series-microcontrollers-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4649-migrating-from-stm32f1-series-to-stm32l4-series--stm32l4-series-microntrollers-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4724-stm32cube-firmware-examples-for-stm32f1-series-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4776-generalpurpose-timer-cookbook-for-stm32-microcontrollers-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4904-migration-of-microcontroller-applications-from-stm32f1-series-to-stm32f4-access-lines-stmicroelectronics.pdf |

| | |
|---|---|
| Application Notes | https://www.st.com/resource/en/application_note/an4989-stm32-microcontroller-debug-toolbox-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4879-introduction-to-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an5225-introduction-to-usb-typec-power-delivery-for-stm32-mcus-and-mpus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an5537-how-to-use-adc-oversampling-techniques-to-improve-signaltonoise-ratio-on-stm32-mcus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-applications-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an2548-introduction-to-dma-controller-for-stm32-mcus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4908-getting-started-with-usart-automatic-baud-rater-detection-for-stm32-mcus-stmicroelectronics.pdf |

| | |
|---|---|
| Application Notes | https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/cd00211314-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack2-mcus-and-mpus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an3154-how-to-use-can-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an4566-how-to-extend-the-dac-performance-on-stm32-mcus-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an5647-the-goertzel-algorithm-to-compute-individual-terms-of-the-discrete-fourier-transform-dft-in-stm32-products-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an2606-introduction-to-system-memory-boot-mode-on-stm32-mcus-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2557-stm32f10x-inapplication-programming-using-the-usart-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2592-achieving-32bit-timer-resolution-with-software-expansion-for-stm32cube-and-standard-peripheral-library-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2594-eeprom-emulation-in-stm32f10x-microcontrollers-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2598-smartcard-interface-with-stm32f10x-and-stm32l1xx-microcontrollers-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2629-stm32f101xx-stm32f102xx-and-stm32f103xx-lowpower-modes-stmicroelectronics.pdf |

| | |
|---|---|
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2656-stm32f10xxx-lcd-glass-driver-firmware-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2668-improving-stm32f1-series-stm32f3-series-and-stm32lx-series-adc-resolution-by-oversampling-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2739-how-to-use-the-highdensity-stm32f103xx-microcontroller-to-play-audio-files-with-an-external-is-audio-codec-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2790-tft-lcd-interfacing-with-the-highdensity-stm32f10xxx-fsmc-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2820-driving-bipolar-stepper-motors-using-a-mediumdensity-stm32f103xx-microcontroller-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2821-clockcalendar-implementation-on-the-stm32f10xxx-microcontroller-rtc-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2824-stm32f10xxx-ic-optimized-examples-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2841-led-dimming-implemented-on-stm32-microcontroller-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2868-stm32f10xxx-internal-rc-oscillator-hsi-calibration-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2931-implementing-the-adpcm-algorithm-in-highdensity-stm32f103xx-microcontrollers-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an2953-how-to-migrate-from-the-stm32f10xxx-firmware-library-v203-to-the-stm32f10xxx-standard-peripheral-library-v300-stmicroelectronics.pdf |
| Application Notes | https://www.st.com/resource/en/application_note/an3012-getting-started- |

| | |
|---|---|
| for related Tools & Software | with-uclinux-for-stm32f10x-highdensity-devices-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an3078-stm32-inapplication-programming-over-the-ic-bus-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an3109-communication-peripheral-fifo-emulation-with-dma-and-dma-timeout-in-stm32f10x-microcontrollers-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an3116-stm32s-adc-modes-and-their-applications-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an3174-implementing-receivers-for-infrared-remote-control-protocols-using-stm32f10xxx-microcontrollers-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an3241-qvga-tftlcd-direct-drive-using-the-stm32f10xx-fsmc-peripheral-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an3307-guidelines-for-obtaining-iec-60335-class-b-certification-for-any-stm32-application-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an3970-plm-smartplug-v2-getting-started-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an3991-how-to-drive-multiple-stepper-motors-with-the-l6470-motor-driver-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an4075-stevalifp016v2-iolink-communication-master-transceiver-demonstration-board-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an4323-getting-started-with-stemwin-library-stmicroelectronics.pdf |
| Application Notes for related Tools | https://www.st.com/resource/en/application_note/an4435-guidelines-for-obtaining-ulcsaiec-607301603351-class-b-certification-in-any-stm32- |

| | |
|---|---|
| & Software | application-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an4453-implementing-the-adpcm-algorithm-in-stm32l1xx-microcontrollers-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an4499-stm32--nrf51822-bluetooth-low-energy-system-solution-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an4578-16channels-led-driver-with-independent-pwm-dimming-control-based-on-led7708-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an4657-stm32-inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an4724-stm32cube-firmware-examples-for-stm32f1-series-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an4841-digital-signal-processing-for-stm32-microcontrollers-using-cmsis-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an4903-generating-jerk-limited-move-profiles-with-the-stevalihm042v1-evaluation-board-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an5360-getting-started-with-projects-based-on-the-stm32mp1-series-in-stm32cubeide-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an5361-getting-started-with-projects-based-on-dualcore-stm32h7-microcontrollers-in-stm32cubeide-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an5394-getting-started-with-projects-based-on-the-stm32l5-series-in-stm32cubeide-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an5418-how-to-build-a-simple-usbpd-sink-application-with-stm32cubemx-stmicroelectronics.pdf |

| | |
|---|---|
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an5426-migrating-graphics-middleware-projects-from-stm32cubemx-540-to-stm32cubemx-550-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an5564-getting-started-with-projects-based-on-dualcore-stm32wl-microcontrollers-in-stm32cubeide-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an5698-adapting-the-xcubestl-functional-safety-package-for-stm32-iec-61508-compliant-to-other-safety-standards-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an5731-stm32cubemx-and-stm32cubeide-threadsafe-solution-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an4502-stm32-smbuspmbus-expansion-package-for-stm32cube-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an5952-how-to-use-cmake-in-stm32cubeide-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an5054-how-to-perform-secure-programming-using-stm32cubeprogrammer-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an6179-how-to-integrate-the-stl-firmware-into-a-time-critical-user-application-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an6127-getting-started-with-stm32h7rx7sx-mcus-in-stm32cubeide-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an6265-getting-started-with-stm32n6-mcus-in-stm32cubeide-stmicroelectronics.pdf |
| Application Notes for related Tools & Software | https://www.st.com/resource/en/application_note/an6382-introduction-to-swd-multidrop-for-stm32-with-stlink-stmicroelectronics.pdf |
| Device Option | https://www.st.com/resource/en/device_option_list/opl_stm32f103_64k.zip |

Lists

| | |
|---|---|
| Errata Sheets | https://www.st.com/resource/en/errata_sheet/es096-stm32f101x8b-stm32f102x8b-and-stm32f103x8b-mediumdensity-device-limitations-stmicroelectronics.pdf |
| Datasheet | https://www.st.com/resource/en/datasheet/cd00161566.pdf |
| Programming Manuals | https://www.st.com/resource/en/programming_manual/pm0056-stm32f10xxx20xxx21xxxl1xxxx-cortexm3-programming-manual-stmicroelectronics.pdf |
| Programming Manuals | https://www.st.com/resource/en/programming_manual/pm0075-stm32f10xxx-flash-memory-microcontrollers-stmicroelectronics.pdf |
| Reference Manuals | https://www.st.com/resource/en/reference_manual/rm0008-stm32f101xx-stm32f102xx-stm32f103xx-stm32f105xx-and-stm32f107xx-advanced-armbased-32bit-mcus-stmicroelectronics.pdf |
| Technical Notes & Articles | https://www.st.com/resource/en/technical_note/tn0516-overview-of-the-stm32f0xf100xxf103xx-and-stm32f2xxf30xf4xx-mcus-pmsm-singledual-foc-sdk-v40-stmicroelectronics.pdf |
| Technical Notes & Articles | https://www.st.com/resource/en/technical_note/tn1163-description-of-wlcsp-for-microcontrollers-and-recommendations-for-its-use-stmicroelectronics.pdf |
| Technical Notes & Articles | https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-shipping-media-for-stm32-microcontrollers-in-bga-packages-stmicroelectronics.pdf |
| Technical Notes & Articles | https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-stmicroelectronics.pdf |
| Technical Notes & Articles | https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-stmicroelectronics.pdf |
| Technical Notes & Articles | https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-stmicroelectronics.pdf |
| Technical Notes & Articles | https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-packages-stmicroelectronics.pdf |

| | |
|---|---|
| Technical Notes & Articles | https://www.st.com/resource/en/technical_note/tn1433-reference-device-marking-schematics-for-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf |
| User Manuals | https://www.st.com/resource/en/user_manual/um1561-stevalisv003v1-firmware-user-manual-stmicroelectronics.pdf |
| User Manuals | https://www.st.com/resource/en/user_manual/um1573-st7540-power-line-modem-firmware-stack-stmicroelectronics.pdf |