


Figure 3: Time per round vs batch size N on STM32F407 Cortex-M4
E per-round time is dominated by ServerWait (UART + Pi pairing); compute-only ratio is 1.5× direct (BN254) or 3.6× (BLS, since 1919 ms vs 523.4 ms)

BN254



BLS12-381

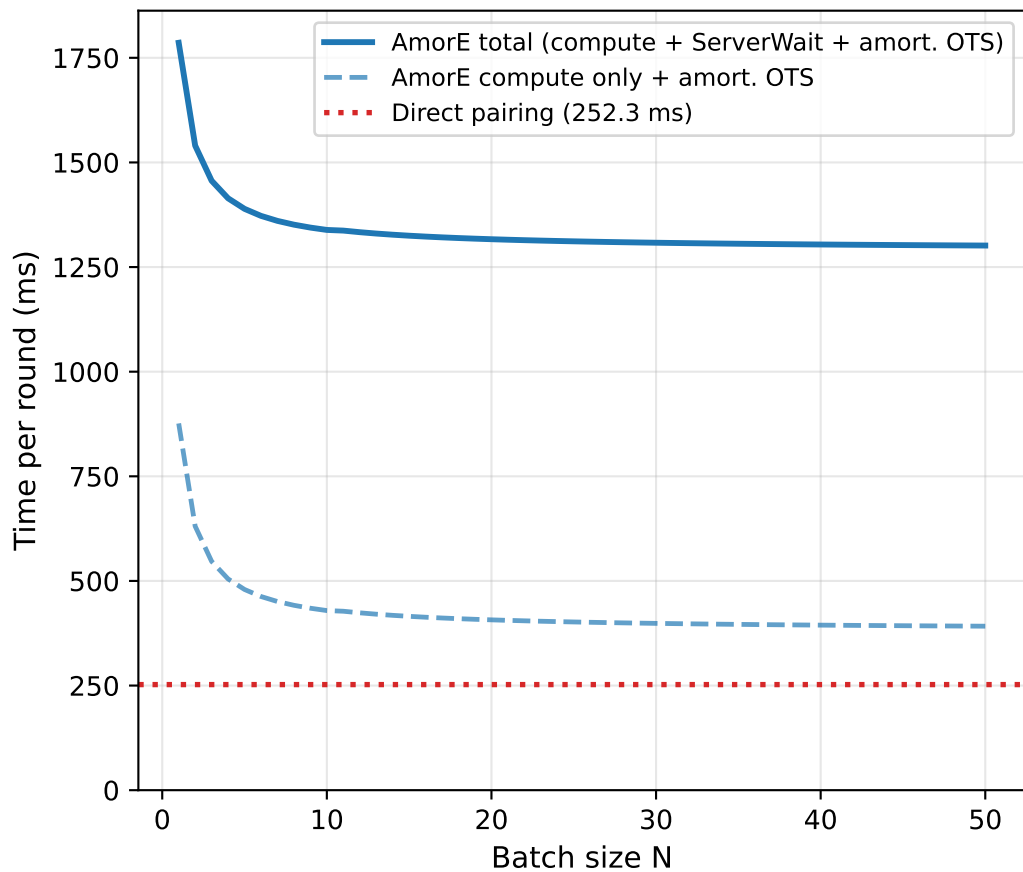