


Figure 5: Per-phase energy breakdown of AmorE Mode A (baseline ServerWait)
Setup/Verify shown as 50/50 split of compute time — only 3 GPIO trigger lines
available, so Blind and Verify cannot yet be split-measured (see C4 of the code review).

BN254



BLS12-381

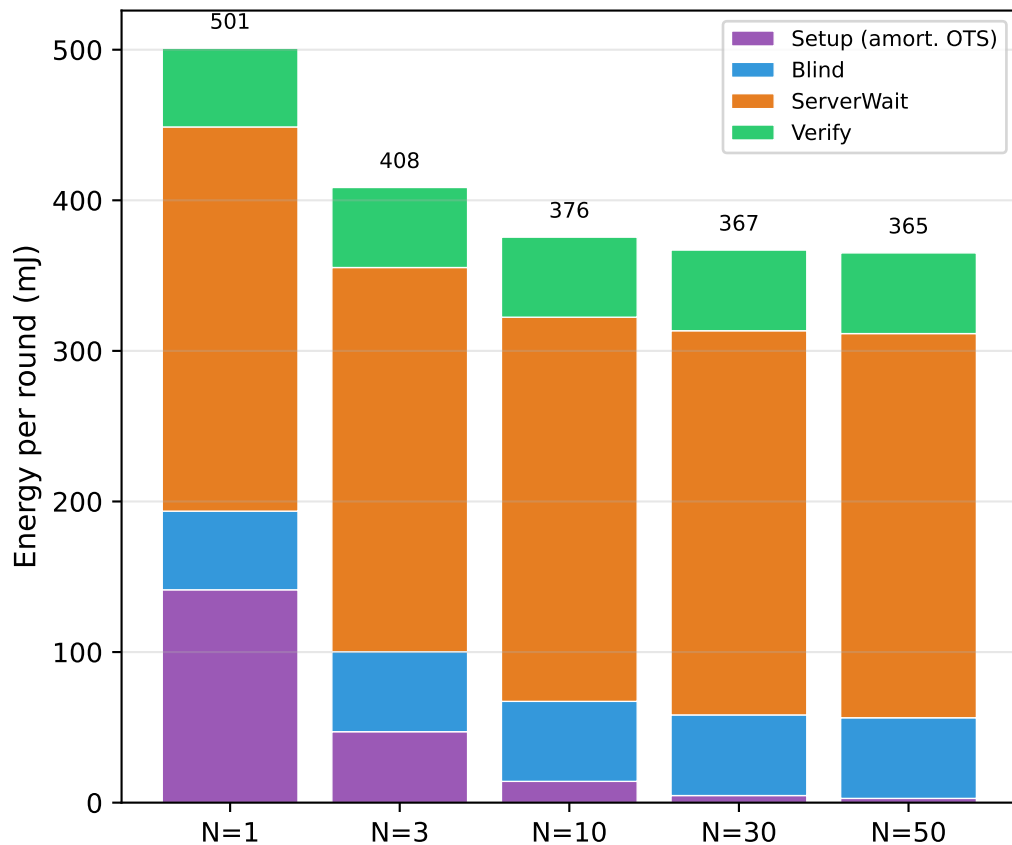