



US 20230231606A1

(19) **United States**(12) **Patent Application Publication**
Matsumura et al.(10) **Pub. No.: US 2023/0231606 A1**(43) **Pub. Date: Jul. 20, 2023**(54) **TERMINAL, RADIO COMMUNICATION
METHOD AND BASE STATION****Publication Classification**(51) **Int. Cl.**
H04B 7/06 (2006.01)(52) **U.S. Cl.**
CPC H04B 7/0626 (2013.01)(71) Applicant: **NTT DOCOMO, INC.**, Tokyo (JP)(72) Inventors: **Yuki Matsumura**, Tokyo (JP);
Nadisanka Rupasinghe, Palo Alto, CA
(US)(73) Assignee: **NTT DOCOMO, INC.**, Tokyo (JP)(21) Appl. No.: **17/996,566**(22) PCT Filed: **Apr. 19, 2021**(86) PCT No.: **PCT/JP2021/015801**

§ 371 (c)(1),

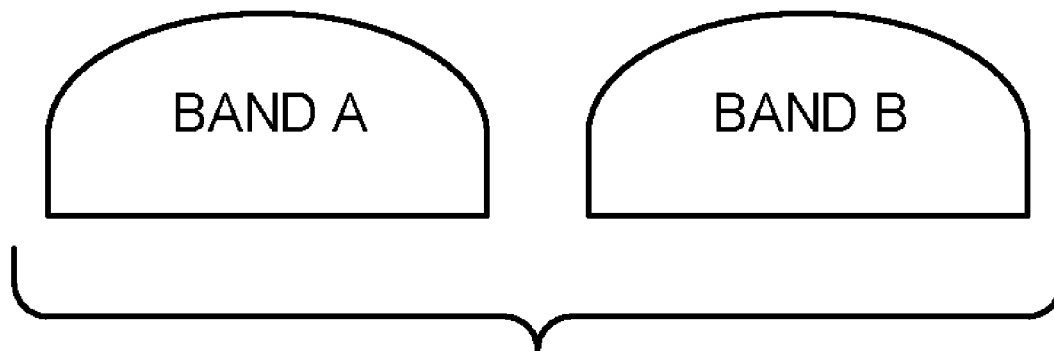
(2) Date: **Oct. 19, 2022**(30) **Foreign Application Priority Data**

Apr. 20, 2020 (JP) 2020-074780

(57) **ABSTRACT**

In order to appropriately perform communication using information related to a channel state information reference signal reported from a terminal, a terminal according to one aspect of the present disclosure includes a control section that controls reporting of a plurality of pieces of first information related to a combination of a channel state information resource for a band combination and the number of ports for the band combination and second information related to the number of ports per channel state information resource for the band combination, and a transmitting section that transmits the first information and the second information.

FIRST PARAMETER PER BAND (FG2-36/2-40/2-41/2-43)

 $\{16, 1, 16\},$
 $\{8, 2, 12\}$
 $\{16, 1, 16\},$
 $\{8, 2, 12\}$

 $\text{BAND A+B} = \{1, 16\}, \{2, 12\}, \{3, 4\}, \{4, 4\}$

SECOND PARAMETER PER BC (UPDATED FG2-33)