US 20240180017A1

(19) United States
(12) Patent Application Publication
ZHANG
(10) Pub. No.: US 2024/0180017 A1
(43) Pub. Date: May 30, 2024

(54) **DISPLAY DEVICE AND METHOD FOR PRODUCING DISPLAY DEVICE**

(71) Applicant: **SHARP KABUSHIKI KAISHA**, Sakai City, Osaka (JP)

(72) Inventor: **BAI ZHANG**, Sakai City, Osaka (JP)

(21) Appl. No.: **18/280,566**

(22) PCT Filed: **Mar. 29, 2021**

(86) PCT No.: **PCT/JP2021/013243**

§ 371 (c)(1),
(2) Date: **Sep. 6, 2023**

Publication Classification

(51) **Int. Cl.**

H10K 77/10	(2023.01)
H10K 59/12	(2023.01)
H10K 59/122	(2023.01)
H10K 59/80	(2023.01)
H10K 102/00	(2023.01)

(52) **U.S. Cl.**

CPC ***H10K 77/111*** (2023.02); ***H10K 59/1201*** (2023.02); ***H10K 59/122*** (2023.02); ***H10K 59/873*** (2023.02); ***H10K 59/877*** (2023.02); ***H10K 59/878*** (2023.02); *H10K 2102/311* (2023.02)

(57) **ABSTRACT**
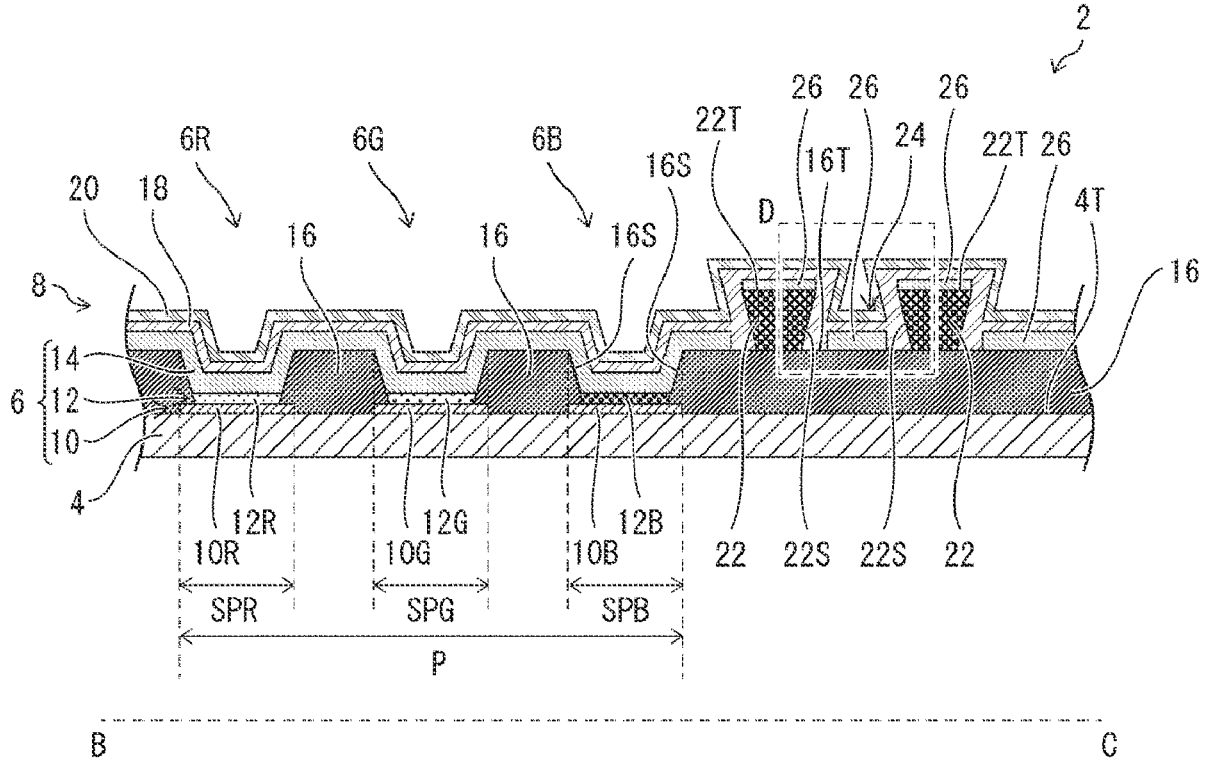
A display device includes: a substrate that is flexible; a protruding portion having a side surface at least partially including a reverse-tapered surface on the substrate; and a sealing layer containing a self-repairing material. Furthermore, the display device includes a recessed space formed with the side surface of the protruding portion and a surface on which the protruding portion is formed. Moreover, the sealing layer convers: the side surface and an upper surface of the protruding portion; and a lower surface of the recessed space, and the recessed space has a side surface at least partially including the reverse-tapered surface.