US 20240237402A9

(19) **United States**

(12) **Patent Application Publication**

LEE

(10) **Pub. No.: US 2024/0237402 A9**

(48) **Pub. Date: Jul. 11, 2024**

CORRECTED PUBLICATION

(54) **DISPLAY DEVICE**

(71) Applicant: **Samsung Display Co., LTD.**, Yongin-si (KR)

(72) Inventor: **DAE-WON LEE**, Yongin-si (KR)

(21) Appl. No.: **18/205,205**

(22) Filed: **Jun. 2, 2023**

Prior Publication Data

(15) Correction of US 2024/0138187 A1 Apr. 25, 2024
See (22) Filed.
See (30) Foreign Application Priority Data.

(65) US 2024/0138187 A1 Apr. 25, 2024

(30) **Foreign Application Priority Data**

Oct. 19, 2022 (KR) 10-2022-0135274

Publication Classification

(51) **Int. Cl.**

H10K 59/121	(2006.01)
G09G 3/00	(2006.01)
G09G 3/3225	(2006.01)
H10K 59/131	(2006.01)

(52) **U.S. Cl.**

CPC ***H10K 59/1213*** (2023.02); ***G09G 3/006*** (2013.01); ***G09G 3/3225*** (2013.01); ***H10K 59/131*** (2023.02); *G09G 2310/0286* (2013.01); *G09G 2330/12* (2013.01)

(57) **ABSTRACT**
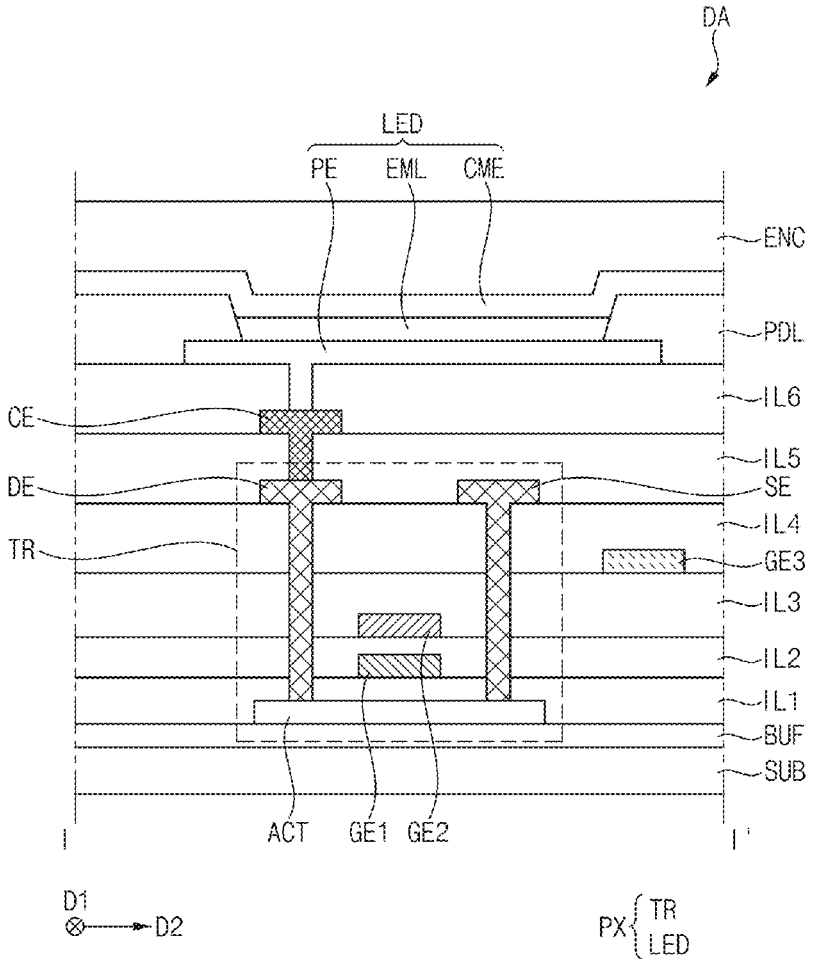
A display device includes: a substrate including a display area and a peripheral area adjacent to the display area, pixels disposed in the display area on the substrate, each of the pixels including a pixel transistor and an emission element connected to the pixel transistor, and a driver disposed in the peripheral area on the substrate and including a driver transistor. The driver transistor includes an active pattern, a first gate pattern disposed on the active pattern and overlapping a first channel region of the active pattern, a second gate pattern disposed in a same layer as the first gate pattern and overlapping a second channel region of the active pattern, a first electrode pattern disposed on the active pattern and connected to a source region of the active pattern, and a second electrode pattern disposed on the active pattern and connected to a drain region of the active pattern.