



US 20240237465A9

(19) **United States**
(12) **Patent Application Publication**
Yang et al.

(10) **Pub. No.: US 2024/0237465 A9**
(48) **Pub. Date: Jul. 11, 2024**
CORRECTED PUBLICATION

(54) **DISPLAY DEVICE INCLUDING A COLOR FILTER DISPOSED ON A BANK STRUCTURE**

(71) Applicant: **SAMSUNG DISPLAY CO., LTD.**,
Yongin-si (KR)

(72) Inventors: **Dong Hyun Yang**, Yongin-si (KR); **Eui Suk Jung**, Yongin-si (KR)

(21) Appl. No.: **18/344,574**

(22) Filed: **Jun. 29, 2023**

Prior Publication Data

(15) Correction of US 2024/0138224 A1 Apr. 25, 2024
See (22) Filed.
See (30) Foreign Application Priority Data.

(65) US 2024/0138224 A1 Apr. 25, 2024

(30) **Foreign Application Priority Data**


Oct. 19, 2022 (KR) 10-2022-0134957

Publication Classification

(51) **Int. Cl.**
H10K 59/38 (2006.01)
H10K 59/12 (2006.01)
H10K 59/122 (2006.01)
H10K 59/80 (2006.01)
(52) **U.S. Cl.**
CPC **H10K 59/38** (2023.02); **H10K 59/1201**
(2023.02); **H10K 59/122** (2023.02); **H10K**
59/8792 (2023.02)

(57) **ABSTRACT**

A display device includes a first and second pixel electrode. An inorganic insulating layer is partially disposed on the first and second pixel electrode. A bank structure is disposed on the inorganic insulating layer and includes a first opening overlapping the first pixel electrode and a second opening overlapping the second pixel electrode. First and second light emitting layers are disposed on the first and second pixel electrodes. First and second common electrodes are disposed on the first and second light emitting layers. A light blocking layer is disposed on the bank structure and includes a first opening hole overlapping the first opening and a second opening hole overlapping the second opening. First and second color filters are disposed in the first and second openings.

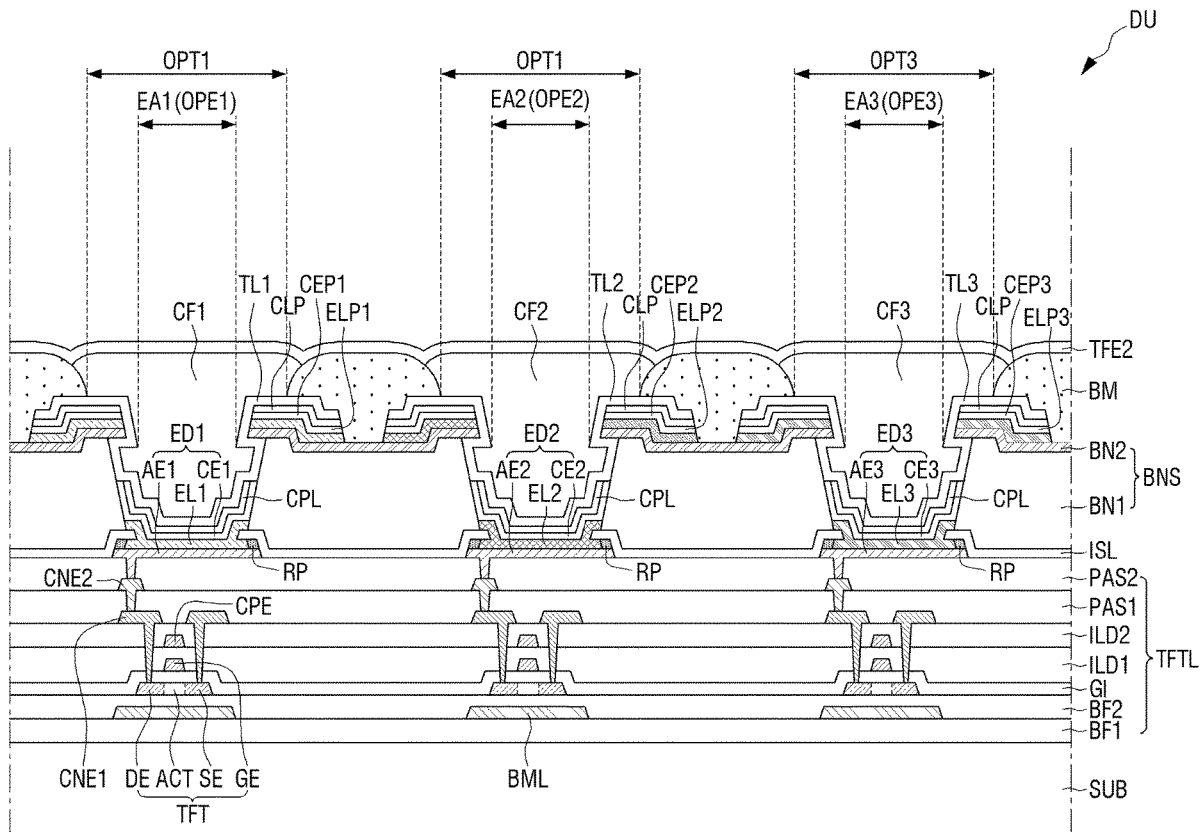

CF: CF1, CF2, CF3
TFEL: TFE1, TFE2, TFE3
TFE1: TL1, TL2, TL3