WI-FI

DEAUTHER

A presentation by:
Tom Yordanov
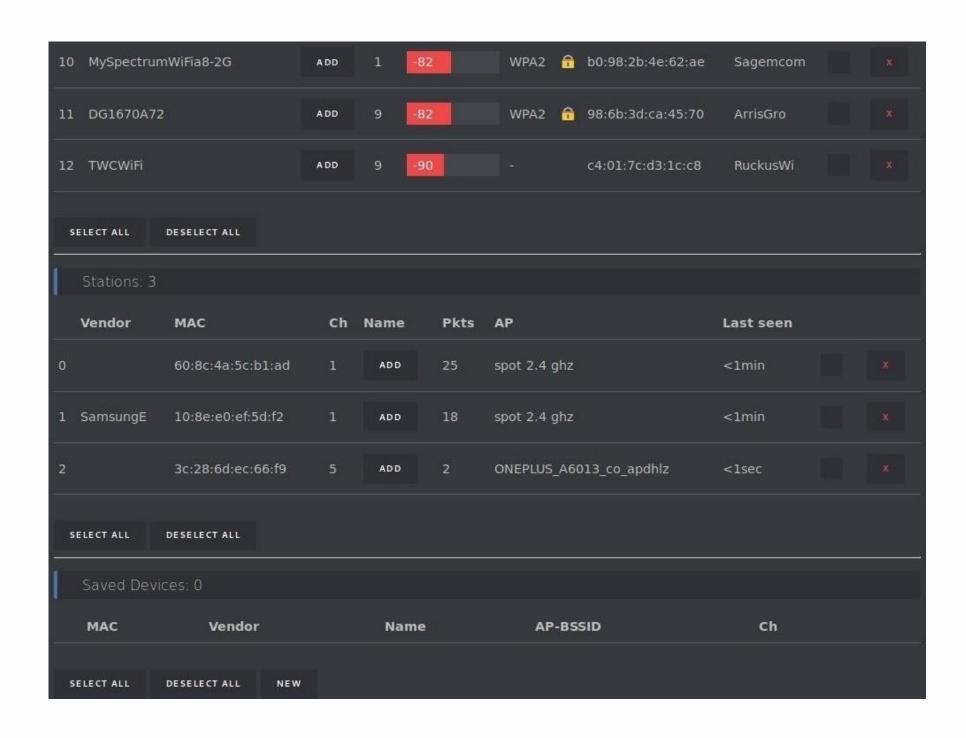
REQUIRMENTS

- Computer
- USB
- ESP8266
- 20 minutes et. free time

FOLLOW THE INSTRUCTIONS FOR INSTALLATION

CLICK ME

10	MySpectrumWiFia8-2G	ADD	1	-82		WPA2 🔒	b0:98:2b:4e:62:ae	Sagemcom	☐	x
11	DG1670A72	ADD	9	-82		WPA2 🔒	98:6b:3d:ca:45:70	ArrisGro	☐	x
12	TWCWiFi	ADD	9	-90		-	c4:01:7c:d3:1c:c8	RuckusWi	☐	x

SELECT ALL   DESELECT ALL

Stations: 3

Vendor	MAC	Ch	Name	Pkts	AP	Last seen		
0		60:8c:4a:5c:b1:ad	1	ADD	25	spot 2.4 ghz	<1min	☐	x
1	SamsungE	10:8e:e0:ef:5d:f2	1	ADD	18	spot 2.4 ghz	<1min	☐	x
2		3c:28:6d:ec:66:f9	5	ADD	2	ONEPLUS_A6013_co_apdhlz	<1sec	☐	x

SELECT ALL   DESELECT ALL

Saved Devices: 0

MAC	Vendor	Name	AP-BSSID	Ch

SELECT ALL   DESELECT ALL   NEW

HOW IT WORKS?

Deauthing a network means to forcibly disconnect all the devices connected to a network. This is possible as the Management frames used to administrate a WiFi connection are unencrypted. So a 3rd party can inject false Management Frames into a network, disconnecting clients.

DISCLAIMER

I'm not responsible for the application of the software and hardware presented. Deauthentication is illegal, so mind how and what you do!