
Dual SX1280 (2x NiceRF LoRa1280) + STM32F103CBU6 — ultra-compact 20 x 32 mm, 4-layer, double-sided

Radio A (top side) on SPI1, radio B (bottom side) on SPI2. Each radio: own NSS/BUSY/DIO1/NRESET, own U.FL.

JP1/JP2: default 1-2 bridged = pin14 to GND (LoRa1280). Cut 1-2 and bridge 2-3 ONLY for LoRa1280-T (TCXO) modules.


Host: J3 JST-SH 1.0mm 1=+5V 2=TX(PA9) 3=RX(PA10) 4=GND. USART1 is also the STM32 ROM bootloader (BOOT0 pad TP6).

RADIO A (SPI1, top)















RADIO B (SPI2, bottom)













MCU STM32F103CBU6 (UFQFPN48, pin-compatible with the 48-pin STM32F103C8T6 family)

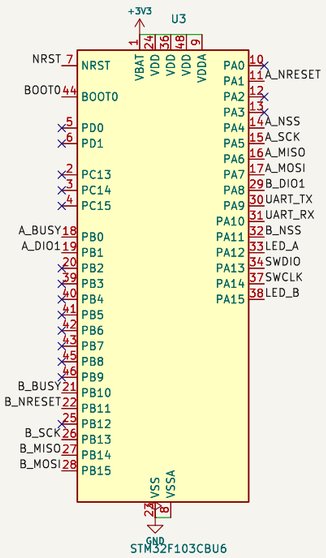


POWER: 5V in -> AP2112K-3.3 (600 mA)








STATUS LEDs



SWD / BOOT pads (bottom)



Reference: NiceRF LoRa1280 series demo board (SX1280 ranging demo)
Generated by hardware/dual-sx1280/scripts/gen_sch.py — edit design.py, not this file

Sheet: /
File: dual_sx1280.kicad_sch

Title: Dual SX1280 ultra-compact radio (2x NiceRF LoRa1280)

Size: A3	Date: 2026-11-12	**Rev: 0.1**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1