



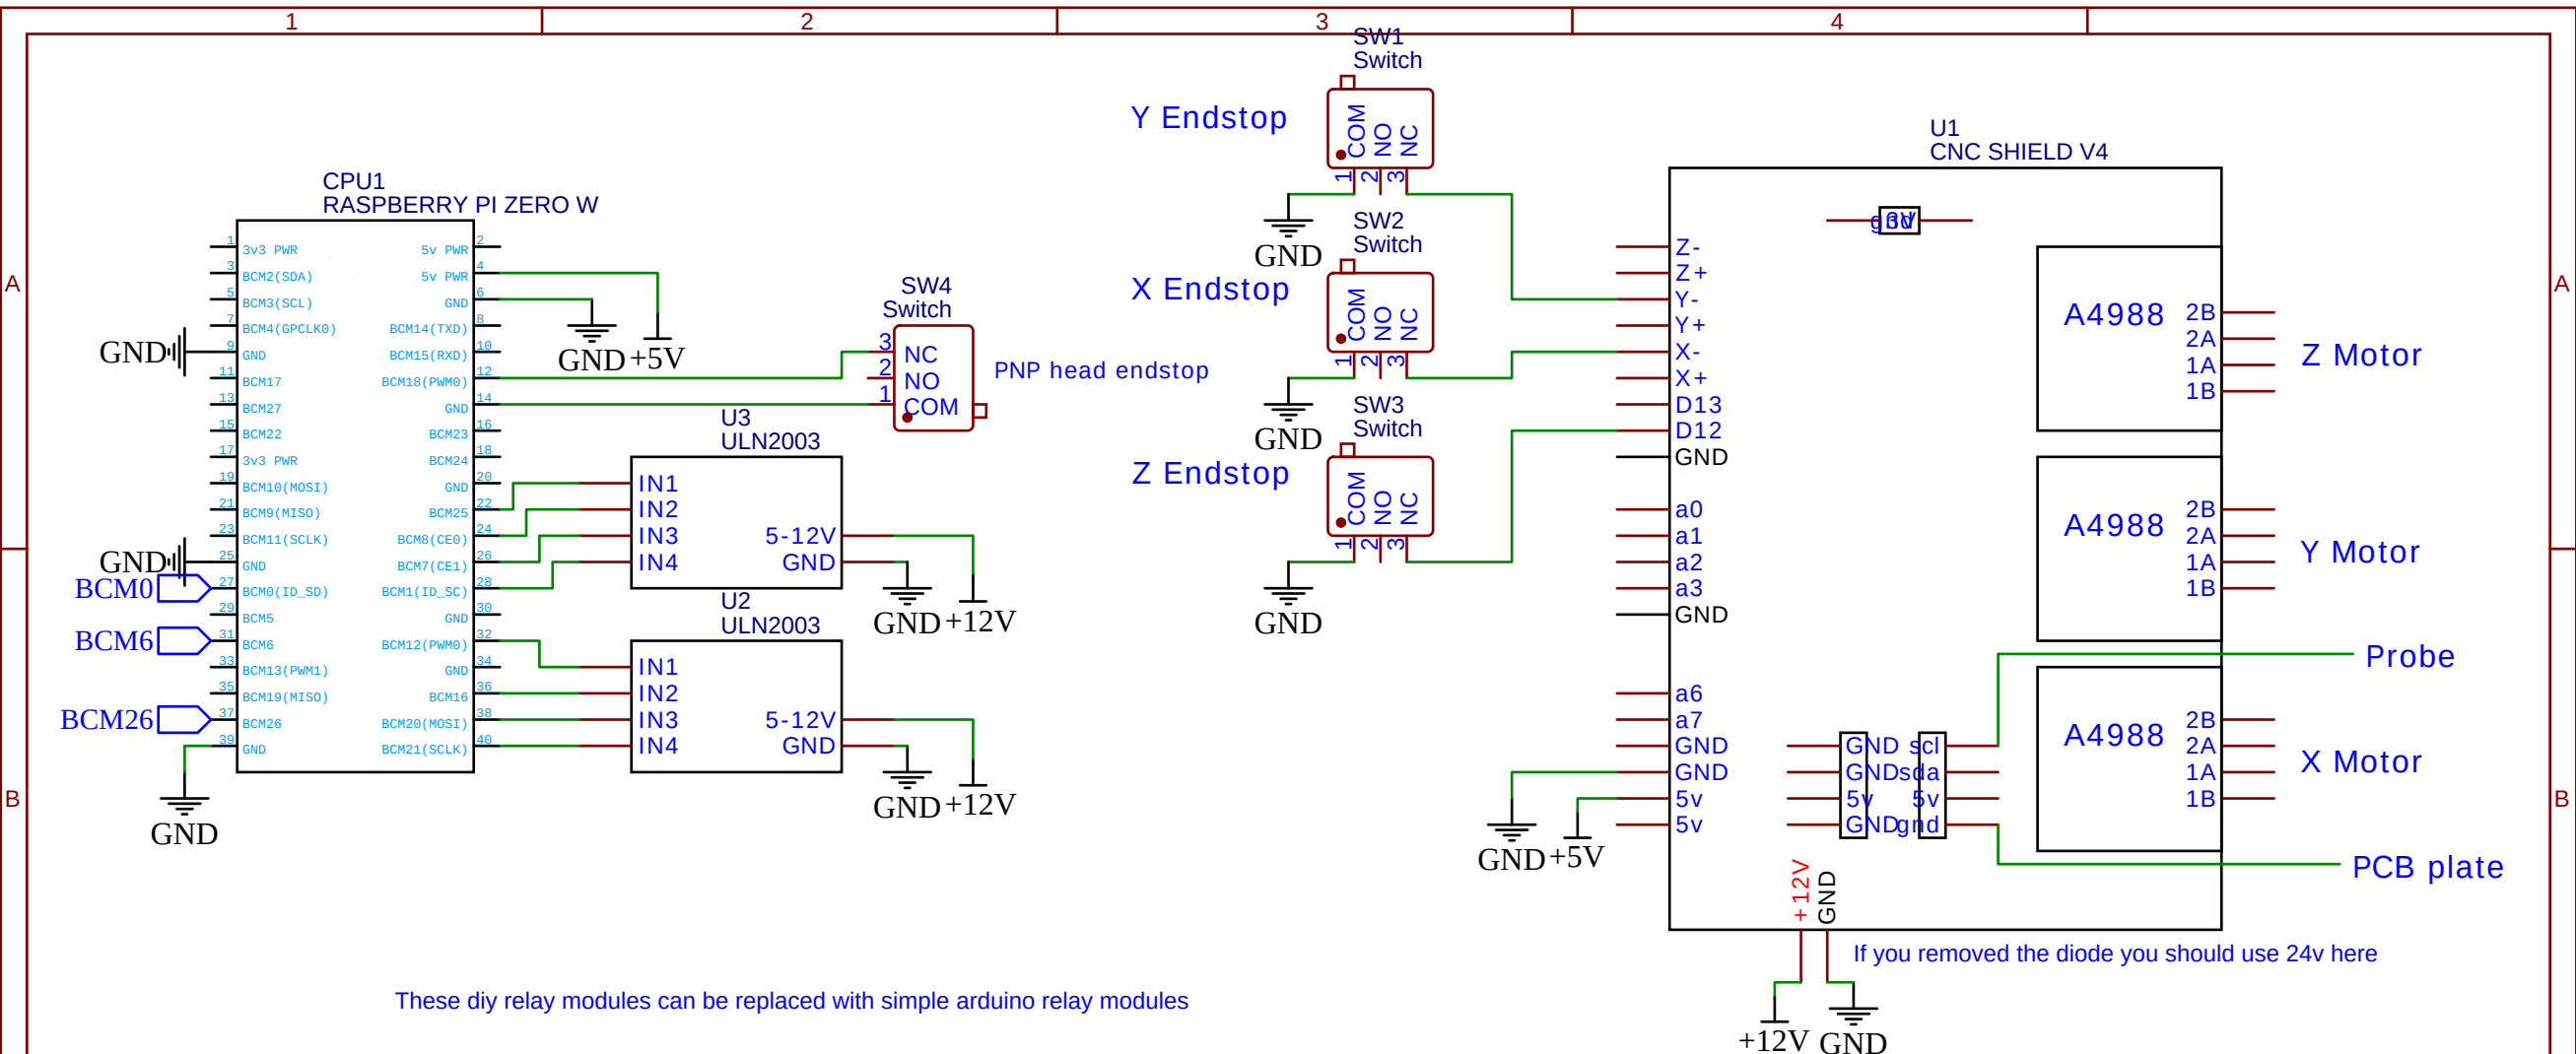

These diy relay modules can be replaced with simple arduino relay modules

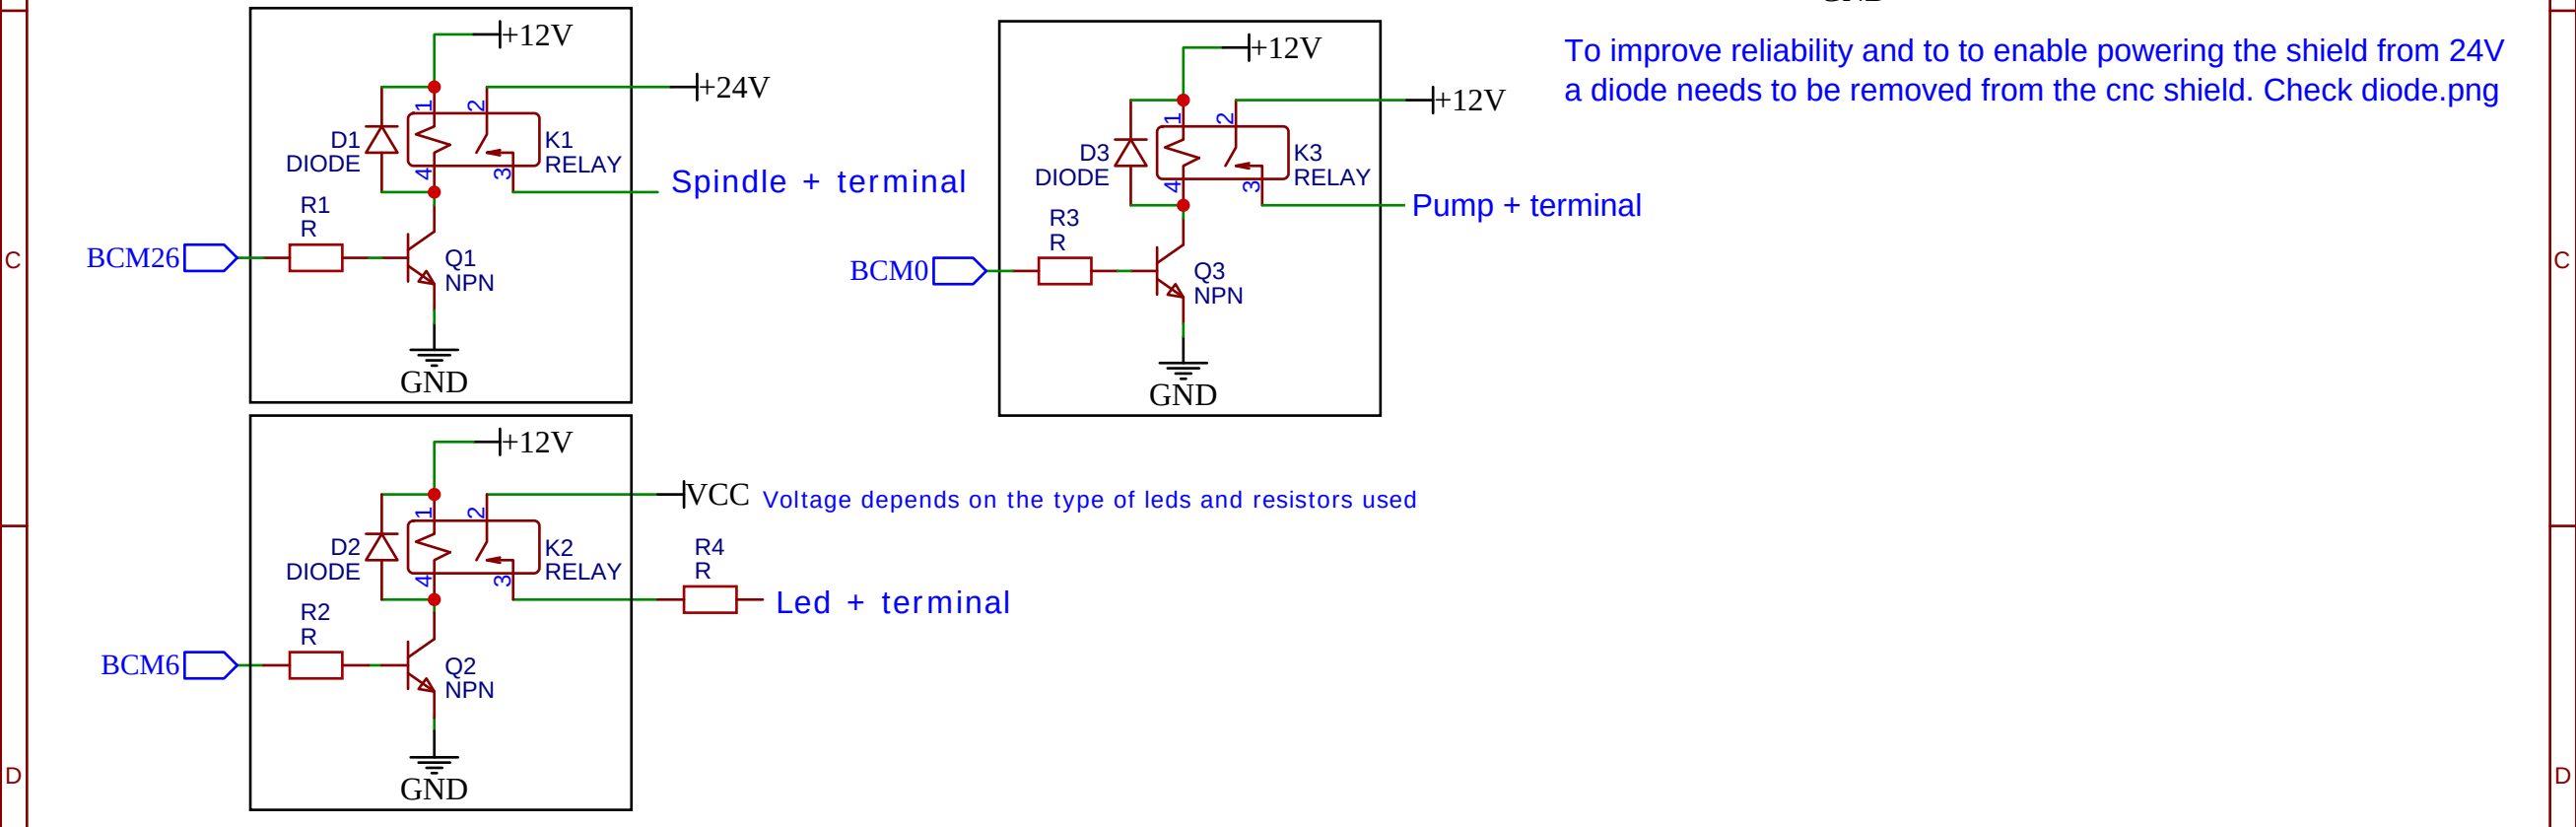

To improve reliability and to enable powering the shield from 24V a diode needs to be removed from the cnc shield. Check diode.png

24v should come from a dedicated 24v psu  
12v and 5v can be obtained using either a step-down converter from 24v  
or using separate AC/DC modules The 5v regulator on the cnc shield can't provide enough current!  
The types and values of the compontents that can be used in here is vast.  
Adjust according to your personal needs or based on the components you  
already have. Example values can be found in the BOM.

|                |                  |                    |
|----------------|------------------|--------------------|
| TITLE: Sheet_1 |                  | REV: 0.1           |
| EasyEDA        | Company: LPODRO  | Sheet: 1/1         |
|                | Date: 2026-08-13 | Drawn By: Koks3606 |