
TENDANCE & 2FA ACCESS CONTROLLER SCHEMATIC


AGEMENT & HIGH CURRENT 3.3V REGULATOR (1.5A PEAK)




3. ESP32-S3 MICROCONTROLLER CORE & PROGRAMMING

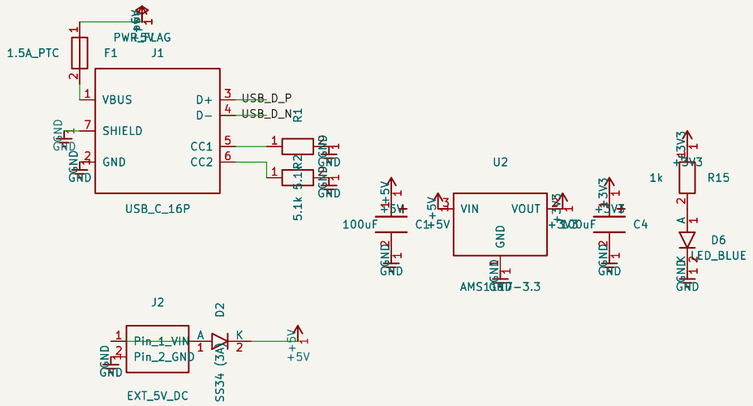


4. W5500 SPI ETHERNET (LAN) INTERFACE

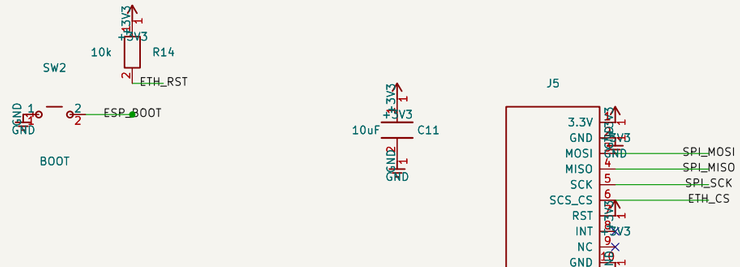


64KB I2C EEPROM LOGS & AUDIO/VISUAL FEEDBACK

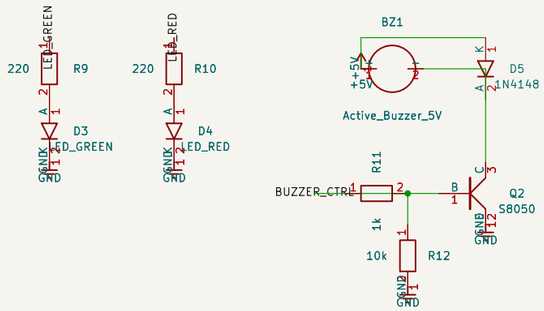

6. BIOMETRICS (R503 FINGERPRINT) & RFID (MFRC522)

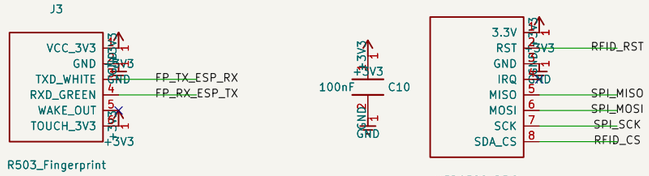

5. 3.5-INCH TFT LCD (ILI9488) & TOUCH (XPT2046) INTERFACE

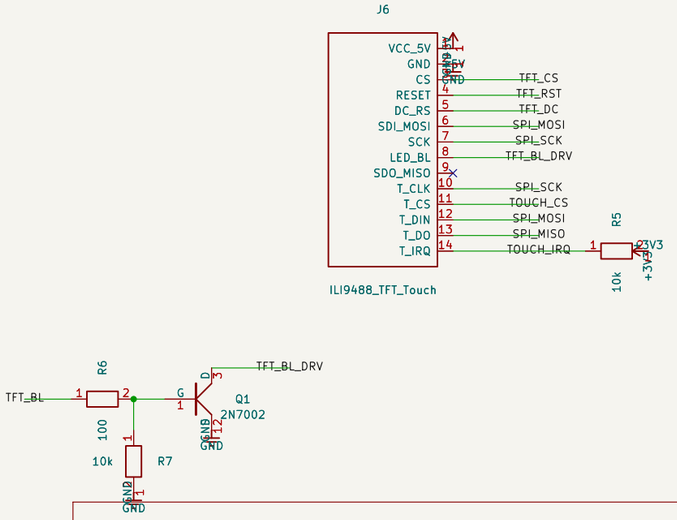

Hardware Pinout strictly according to Specification Document
Dual 2FA: Capacitive Fingerprint (R503) + RFID (MFRC522) + 3.5in TFT Touch + W5500 LAN
Antigravity Smart Embedded Solutions

Sheet: /		
File: ESP32_S3_Attendance_System.kicad_sch		
Title: ESP32-S3 Biometric Attendance & Access Controller		
Size: A3	Date: 2026-08-20	**Rev: v1.0**
KiCad E.D.A. 10.0.4		Id: 1/1