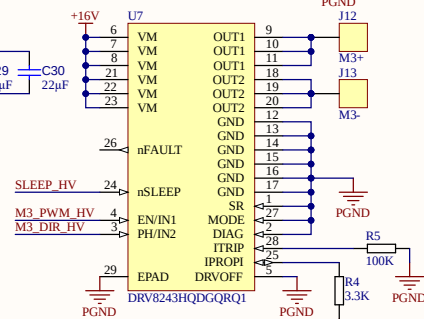
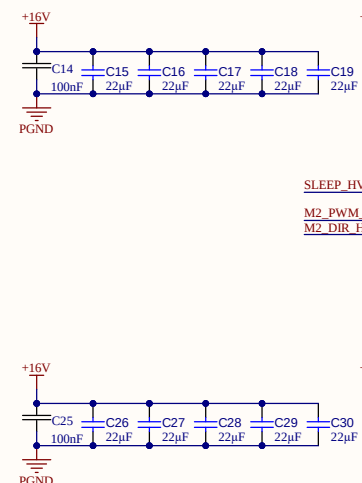
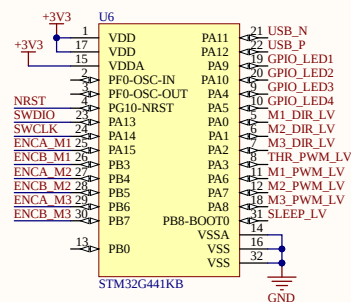
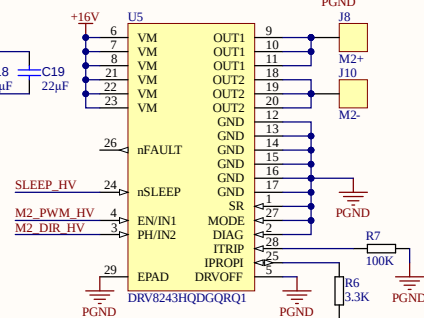
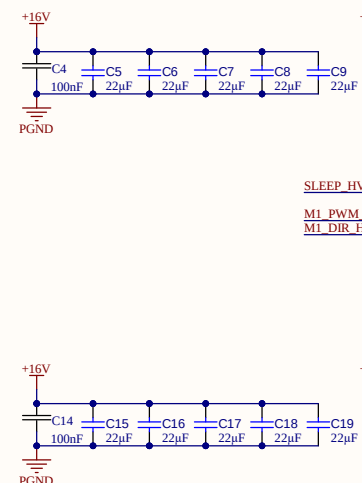
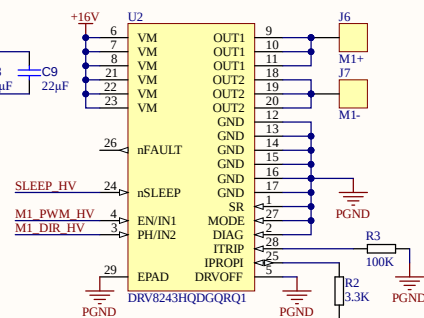


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

Line #	Name	Description	Designator	Revision ID	Revision State	Revision Status	Quantity	Manufacturer 1	Manufacturer Part Number 1	Manufacturer Lifecycle 1	Supplier 1	Supplier Part Number 1	Supplier Unit Price 1	Supplier Subtotal 1
	0603C	Capacitor	C1, C2, C10, C11, C20, C21				6							
	0603C	Capacitor	C3, C4, C12, C13, C14, C23, C24, C25, C31				9							
	CL21A226MAYNNINE	Ceramic Capacitor, Multilayer, Ceramic, 25V, 20%+Tol, 20%-Tol, X5R, 15% TC, 22uF, Surface Mount, 0805	C5, C6, C7, C8, C9, C15, C16, C17, C18, C19, C26, C27, C28, C29, C30, C32, C33				17							
	0603C	Capacitor	C22				1							
	CM1223-02SD	TVSdiode	D1				1							
	PAD	PAD	J1, J4, J6, J7, J8, J10, J12, J13				8							
	CONNECTOR	Micro-MaTch 4 Position 1.27 mm Pitch Vertical Female-on-Board Connector	J2, J3, J11, J14				4							
	10118193-0001LF	USB - micro B USB 2.0 Receptacle Connector 5 Position Surface Mount, Right Angle; Through Hole	J5				1							
	Amphenol 20021121		J9				1							
	LED	led	LED1, LED2, LED3, LED4, LED5				5							
	BUK6Y10-30P	Reverse voltage protection	Q1				1							
	0603R	resistor	R1, R2, R3, R4, R5, R6, R7, R8, R9, R10, R11				11							
	MAX14930DASE+	isolator	U1, U3				2							
	DRV8243HQDQQRQ1	Automotive 40-V, 12-A H-bridge driver with integrated current sensing and feedback 28-HVSSOP -40 to 125	U2, U5, U7				3							
	NCP164CSN330T1G	Voltage regulator for microcontroller	U4				1							
	STM32G441KB	microcontroller	U6				1							
	NCV8730ASN500T1G	Voltage regulator at the motor driver's side	U8				1							