



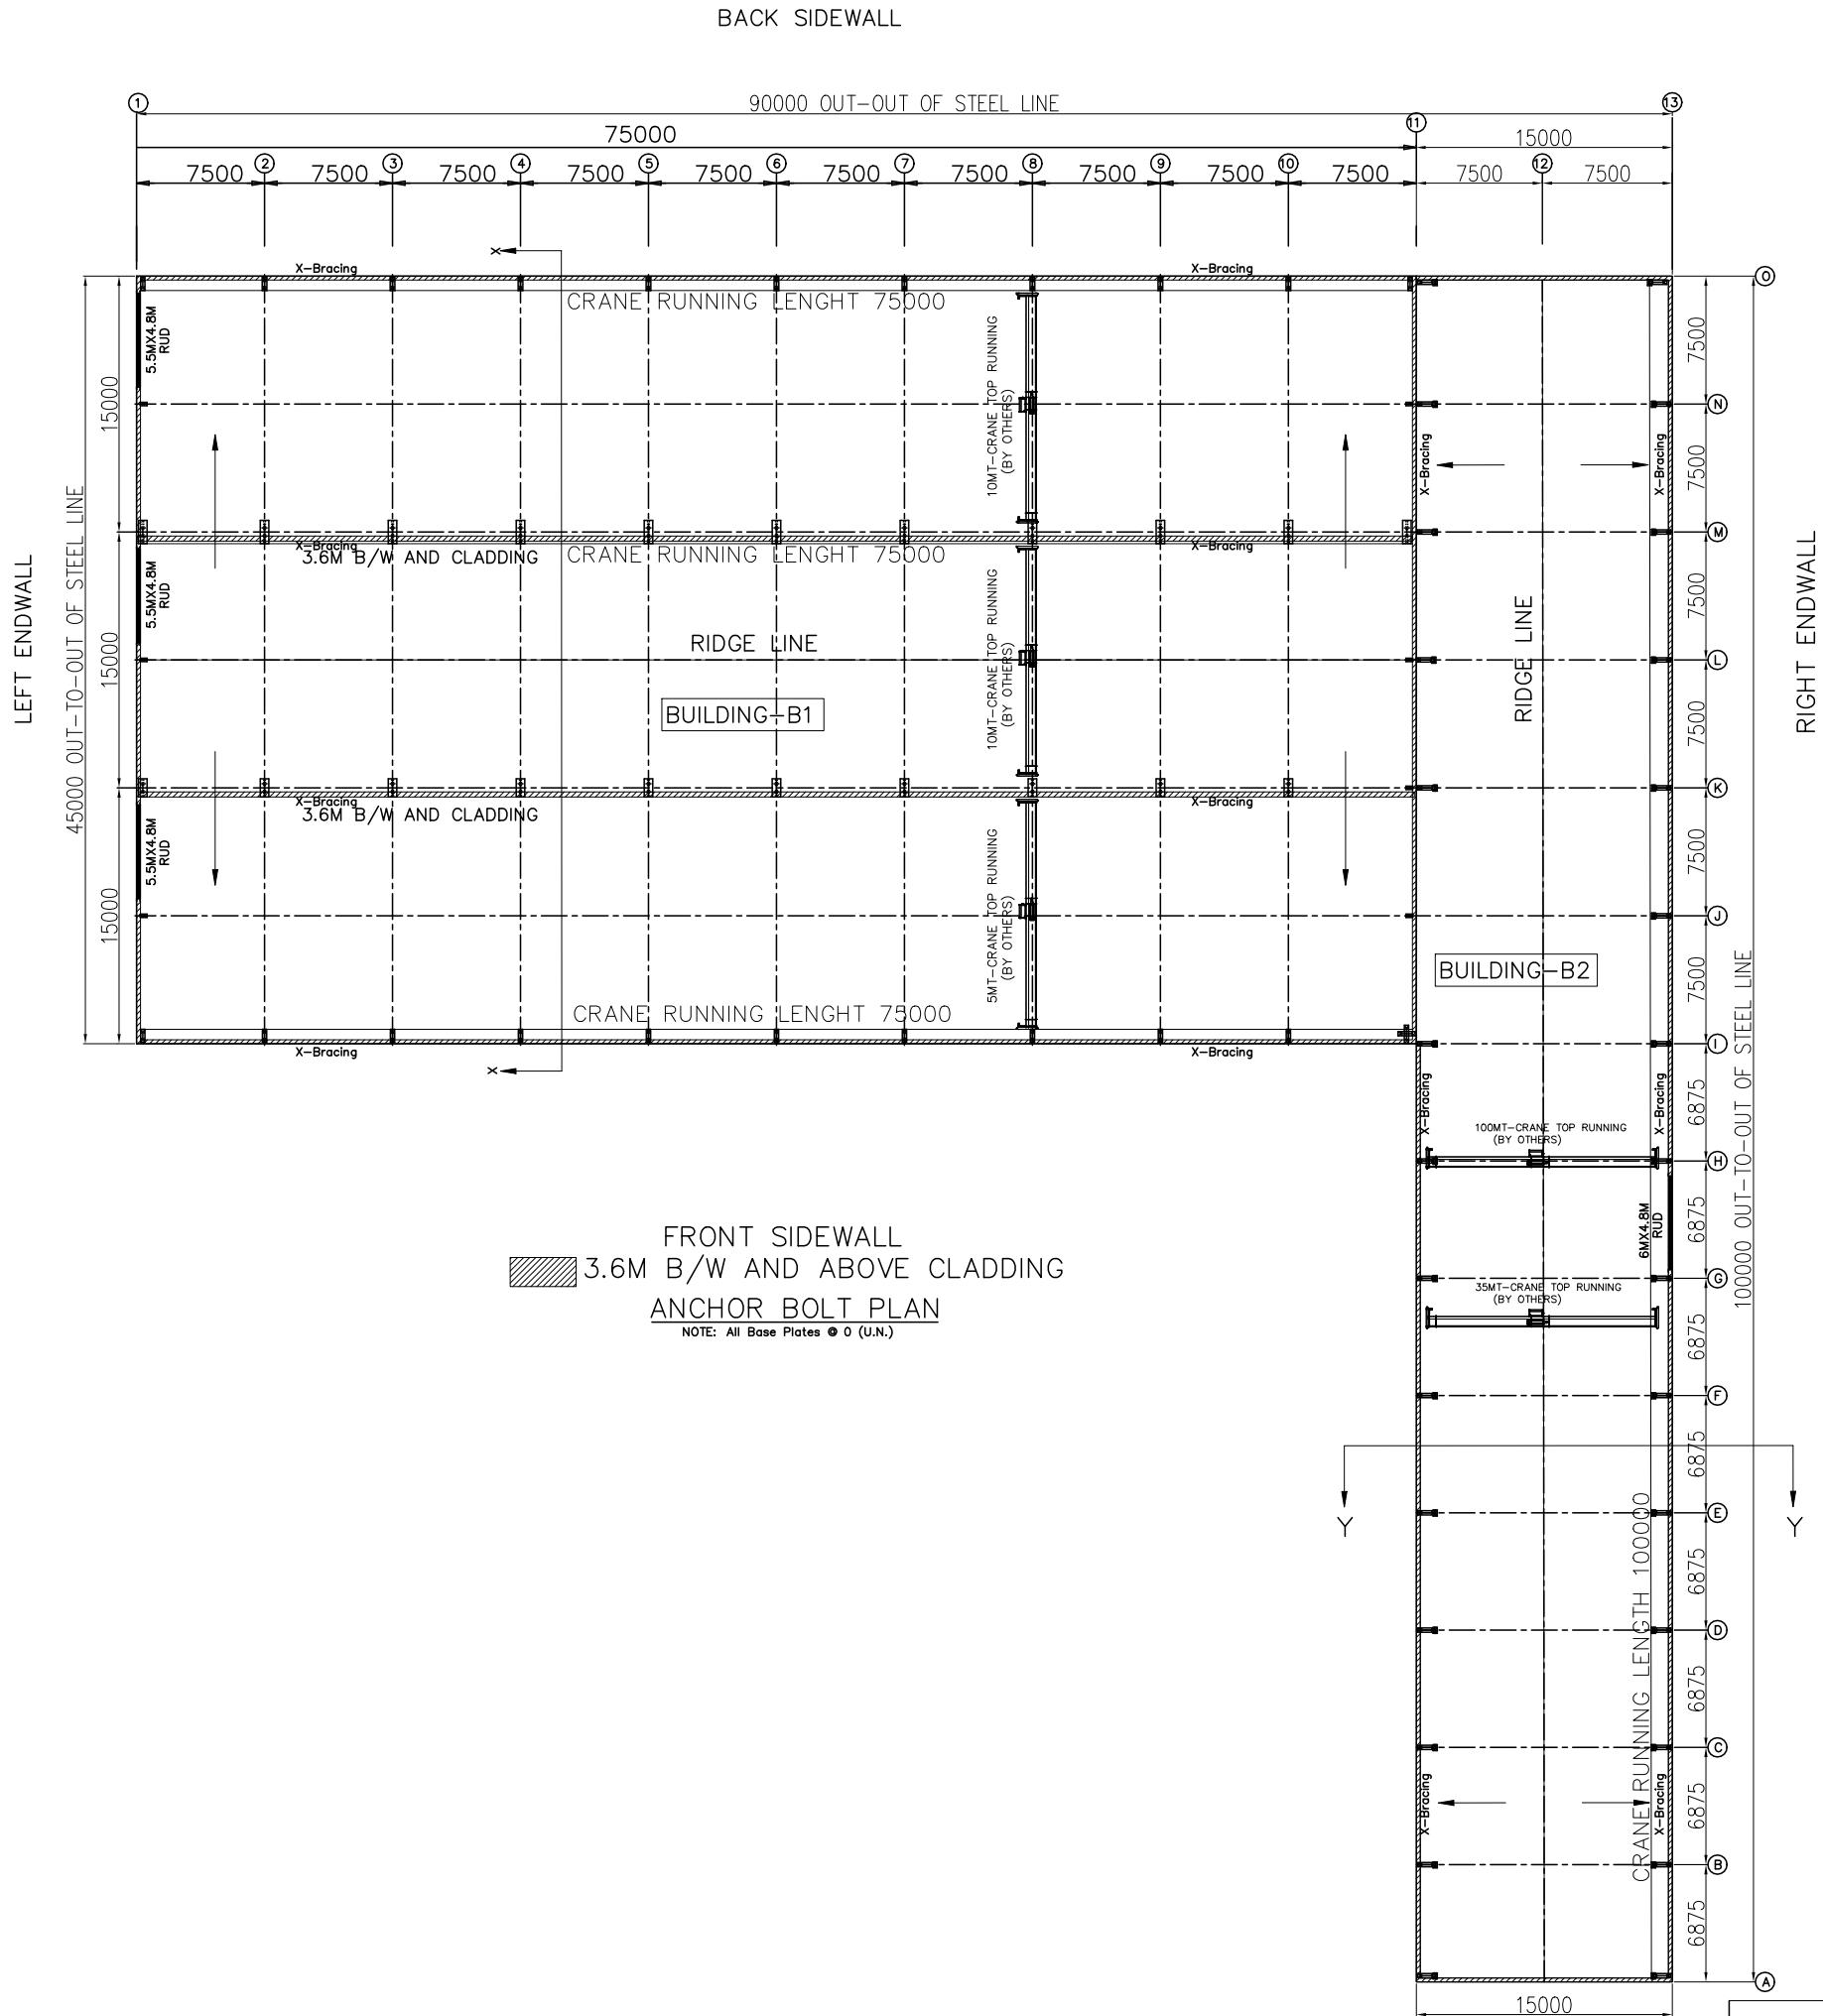


INFINITI SOLUTION				
PROJECT	INDUSTRIAL	ANCHOR BOLT PLAN		
ID	C493-012-Raipur	DESIGN: ASB	DRAFT: ASB	CHECK:
PROJECT ADDRESS	Raipur	DATE: 13/FEB/2026		

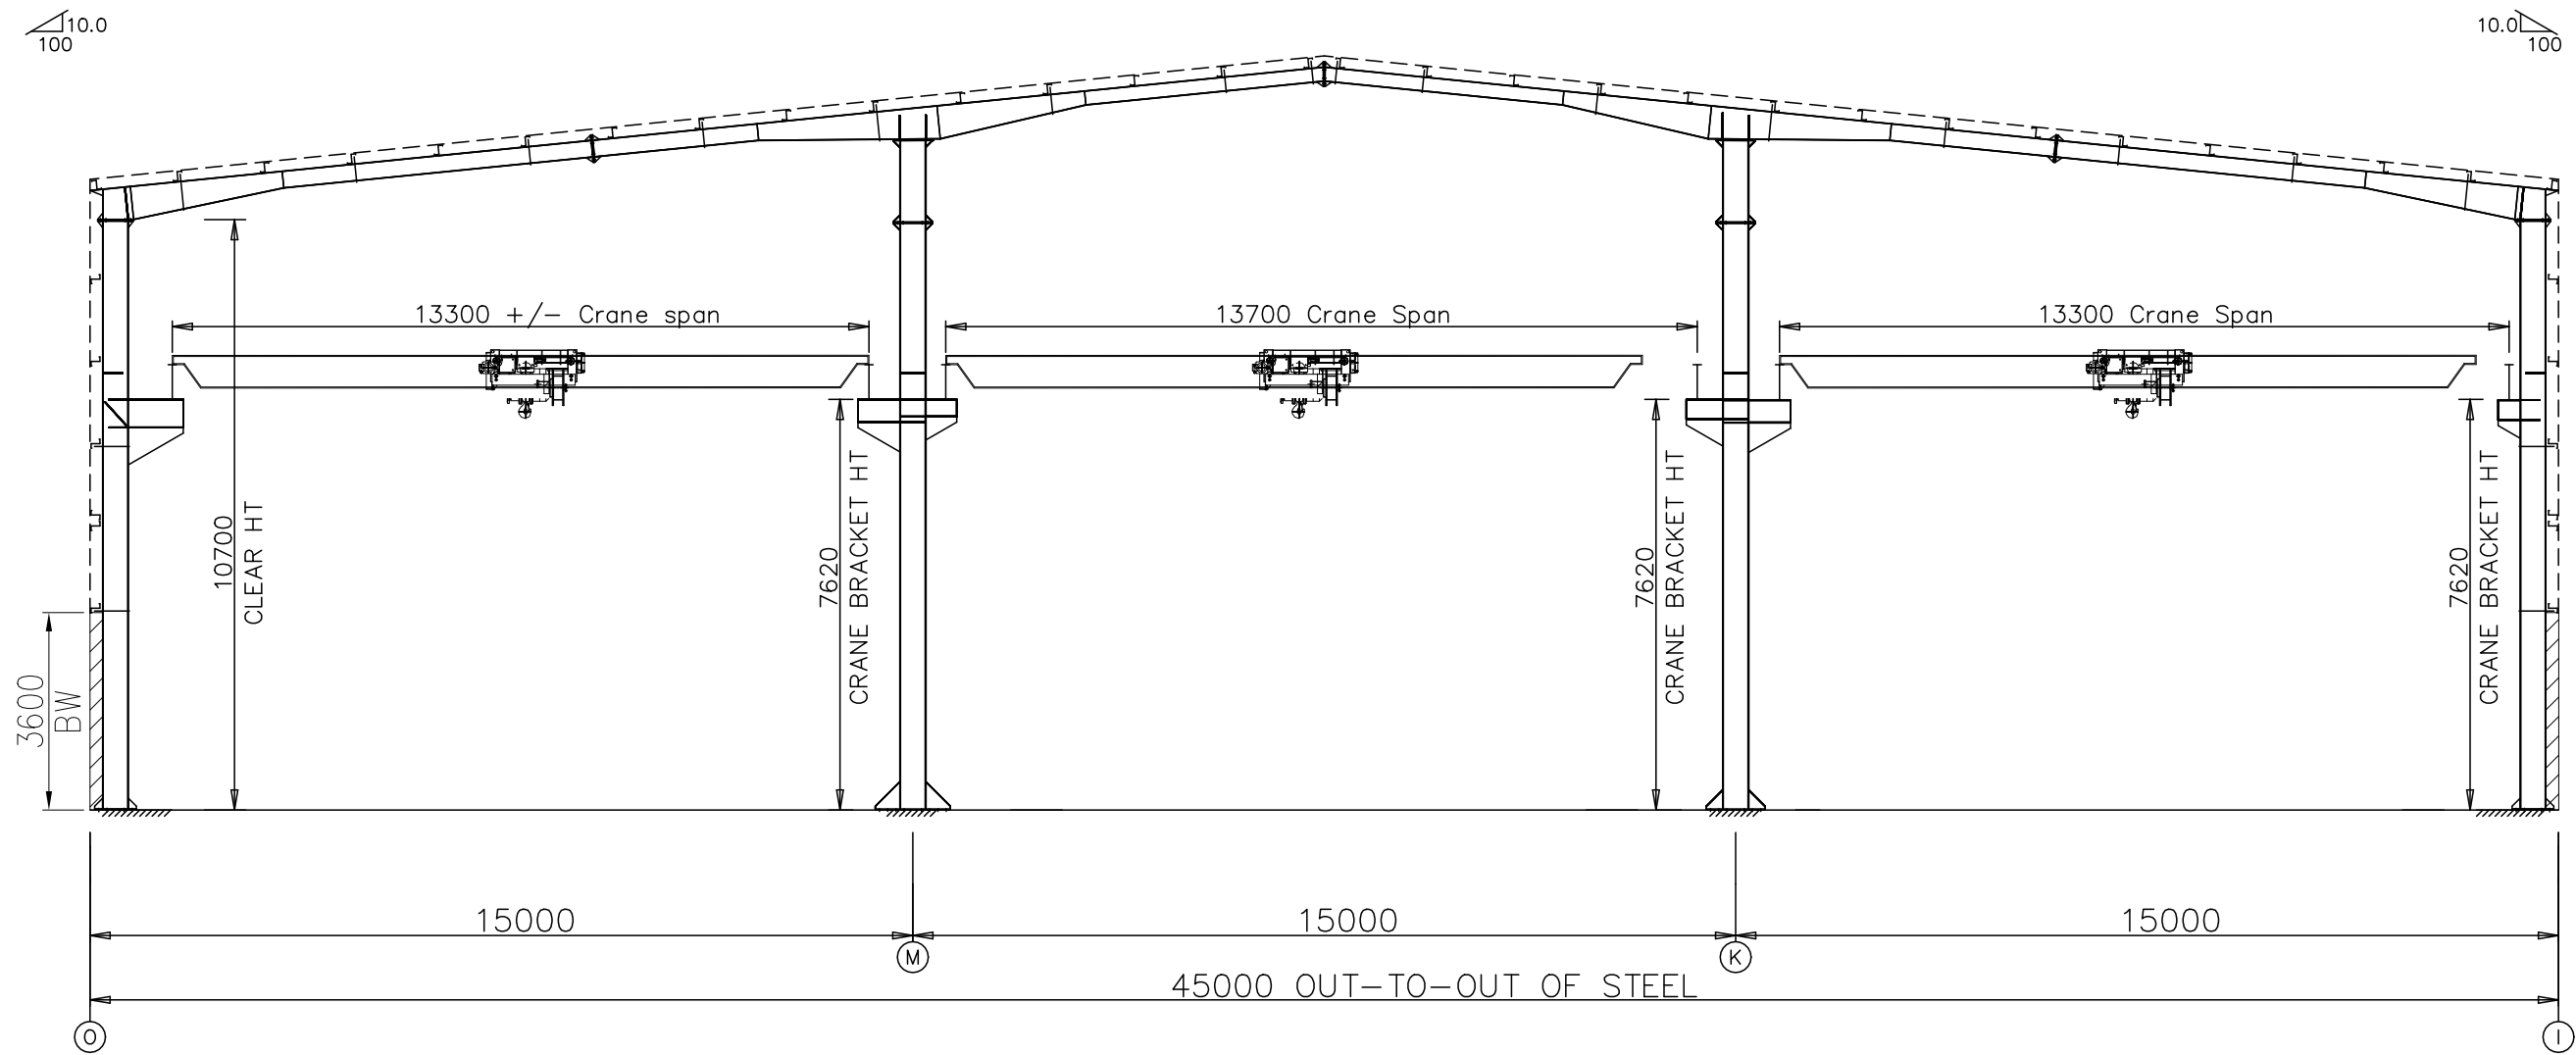

RIGID FRAME ELEVATION: FRAME LINE X-X

INFINITI SOLUTION				
PROJECT	INDUSTRIAL	RIGID FRAME ELEVATION		
ID	C493-012	DESIGN: ASB	DRAFT: ASB	CHECK:
PROJECT ADDRESS	Raipur	DATE: 12/FEB/2026		

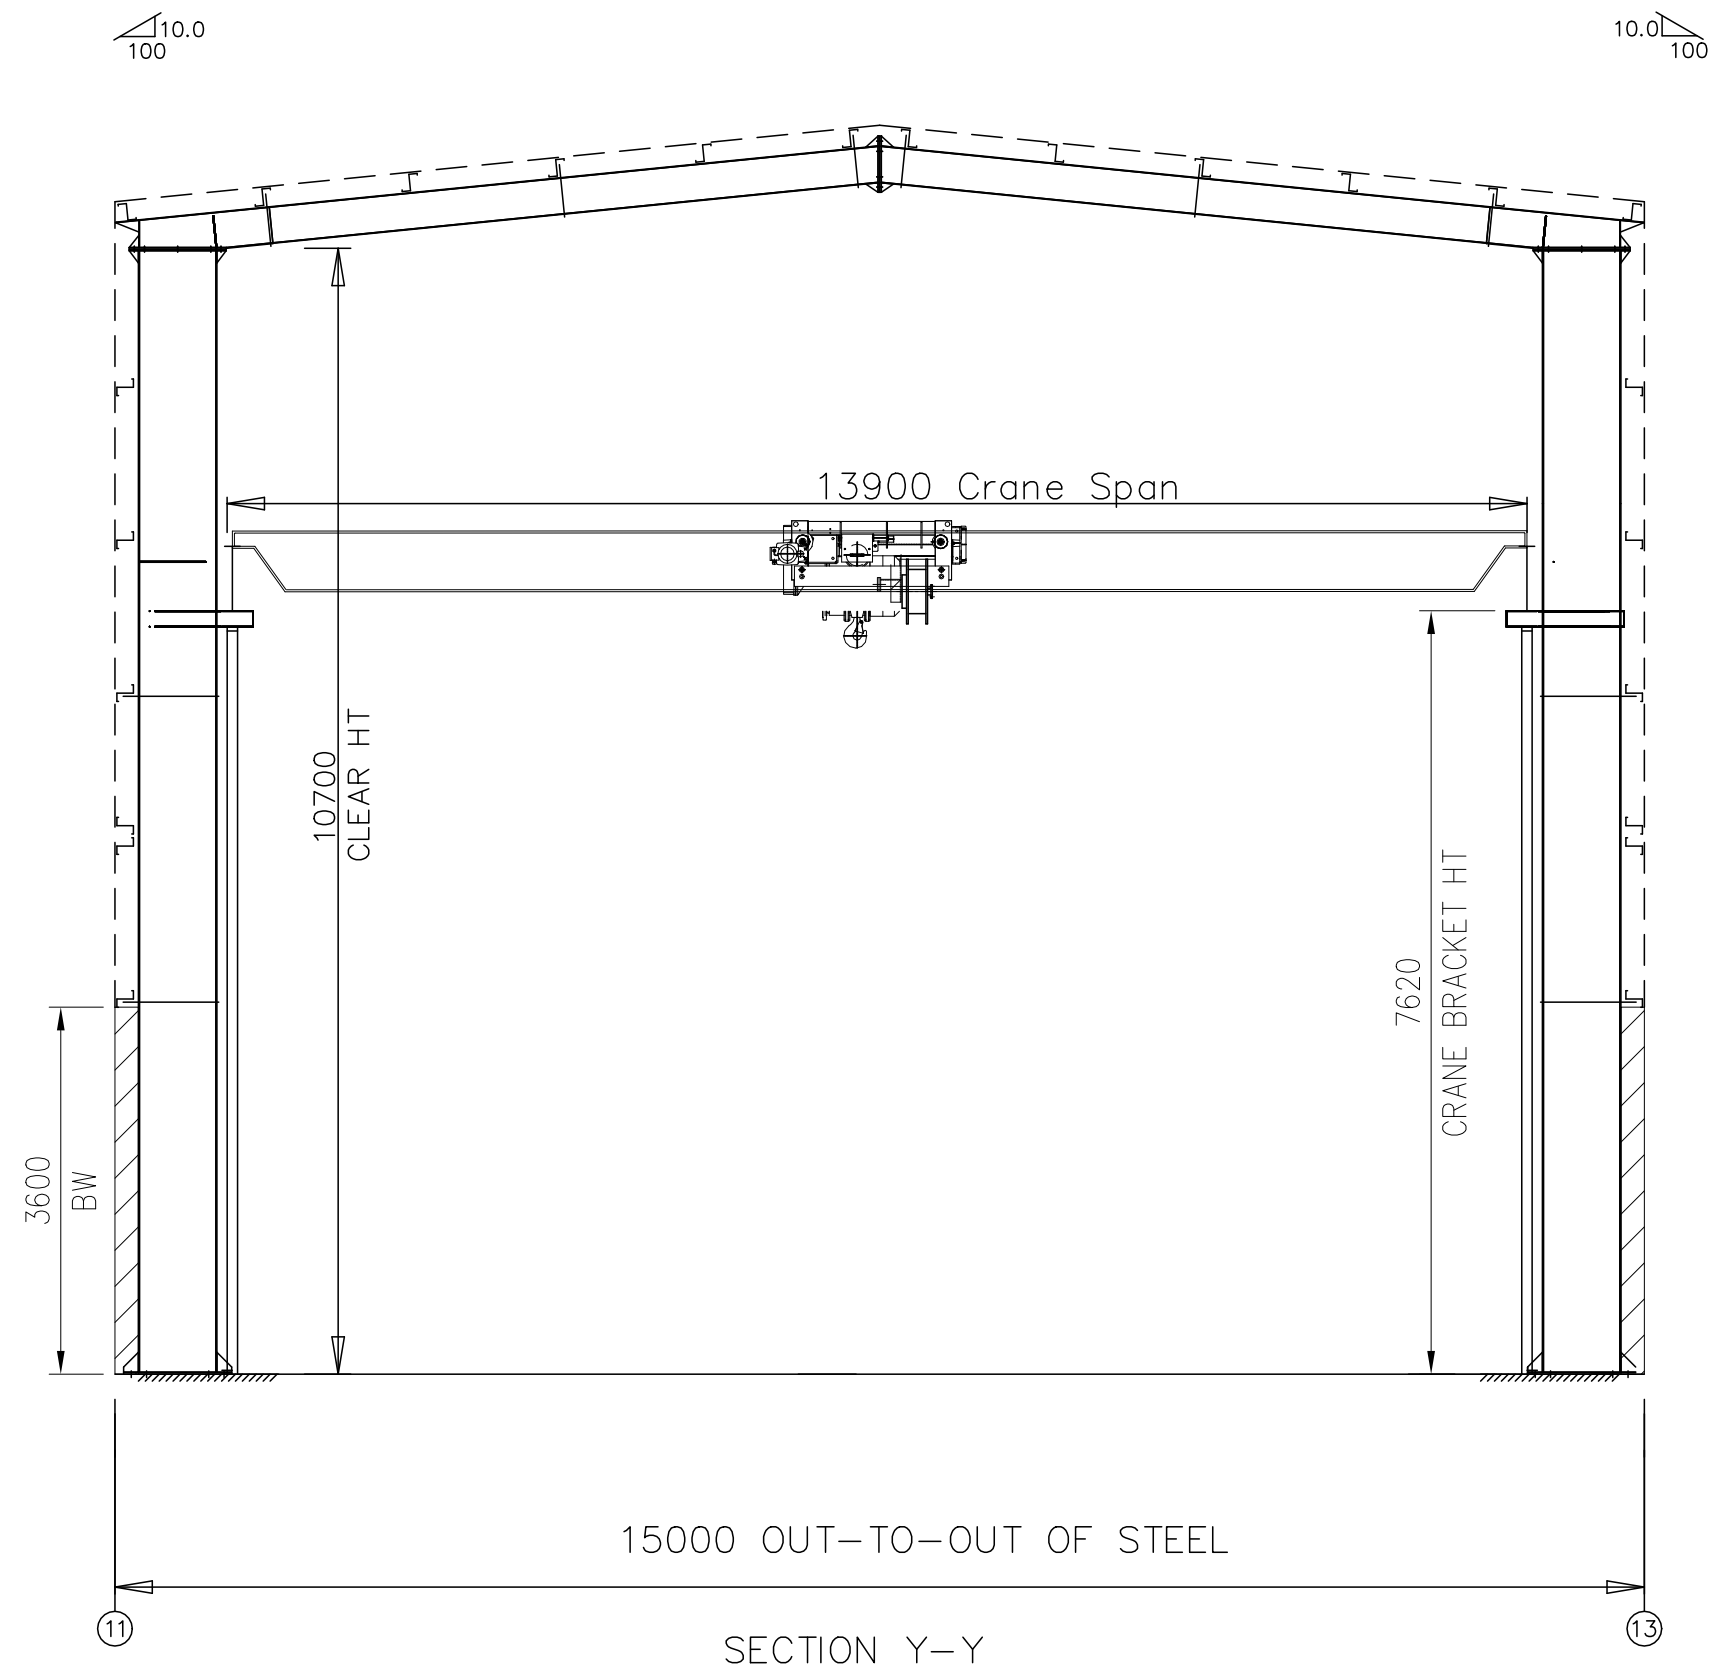

INFINITI SOLUTIONS				
PROJECT	INDUSTRIAL	RIGID FRAME ELEVATION		
ID	111	DESIGN:	DRAFT:	CHECK:
PROJECT ADDRESS	Proposed Warehouse	DATE: 12/FEB/2026		

Sr.No.		
1	Date	16-Feb-25
2	Structure application	Shed
3	Proposal Id	C493-012-Raipur
4	Building No.	1
5	Option	1
6	Revision	0
7	Area (sqm)	4875
8	Design Software	MBS

Sr.No.	Parameter	Details
1	Building type	Clear Span
2	Length in m (o/o of steel)	Ref fig
3	Width in m (o/o of steel)	Ref fig
4	Left clear height in m	10.7
5	Right clear height in m	10.7
6	Ridge line distance	Ref fig
7	Roof slope (?:100)	10/100
8	Left end wall bay spacing in m	Ref fig
9	Right end wall bay spacing in m	Ref fig
10	Side wall bay spacing	Ref fig
11	Wall bracing type	Rod
12	Roof bracing type	Rod
13	Roof sheeting	0.45mm aluzinc
14	Wall sheeting	0.45mm aluzinc
15	Doors	Ref fig
16	Windows	NA
17	Block wall in m	3.6
18	Rigid frames interior column locations	2@15

Sr no.	Item	Details
1	Canopy Extension in m	NA
2	Slope	10/100
3	Clear top height in m	NA
Sr no.	Accessories	
1	Braced bays (Bay id)	Ref fig
2	Skylights (FRP 3.25m x 1m)	NA
3	Turbo Ventilators (600 mm throat diameter)	NA
4	Base Elevation	NA
5	Bay Id @ Left end wall	NA
6	Bay Id @ Front side wall	NA
7	Bay Id @ Right end wall	NA
8	Bay Id @ Back side wall	NA

Sr no.	Parameter	Details
1	Desing code	AISC code
1	Dead Load in kN/m ²	0.1
2	Live Load in kN/m ²	0.57
3	Collateral load kN/m ²	0
4	Max wind speed in m/s	47
5	Max rainfall intensity in mm/hr	150
6	Exposure category	B
7	Seismic zone co-efficient (III)	0.16
8	Maximum temperate variation	20
Sr no.	Parameter	Details
1	Frames Vertical deflection	Span/150
2	Frames Horizontal deflection	Height/100
3	Purlins	Span/150
4	Girts	Span/120
5	Crane beams	Span/600
6	Mezzanine beams	Span/240
7	Misc	
Sr no.	Assumption/Remark	Details
1	Hot rolled sections grade (Mpa)	250
2	Cold form sections grade (Mpa)	350
3	Primary sections grade (Mpa)	350
4	Building design condition	Enclosed
4	Minimum web thickness in mm	4
5	Minimum flange thickness in mm	5
6	Minimum flange width in mm	150
7	Minimum web depth in mm	250
8	Minimum cold form thickness in mm	1.5
9	Sheeting profile width & length in m	1.22 & 7.65
10	Connection bolts grade	High strength bolts (ASTM A325 or equivalent)

Sr no.	Parameter	Details
1	Crane Capacity in kN	1000
2	Crane bracket height in m	7.62
3	Crane span in m	13.3 +/-
4	Crane running length in m	75
5	Crane class	II (Normal duty)
6	Crane Type	Top running
7	Type of Girder	Double
8	Bridge Weight in MT	56
9	Hoist/Trolley Weight in MT	21.5
10	Number of Wheels	8
11	Wheel Load in MT	30.5
12	Wheel Base in mm	4500

Sr no.	Parameter	Details
1	Crane Capacity in kN	350
2	Crane bracket height in m	7.65
3	Crane span in m	13.3 +/-
4	Crane running length in m	75
5	Crane class	II (Normal duty)
6	Crane Type	Top running
7	Type of Girder	Double
8	Bridge Weight in MT	23
9	Hoist/Trolley Weight in MT	6.5
10	Number of Wheels	4
11	Wheel Load in MT	22.5
12	Wheel Base in mm	3800

Sr no.	Parameter	Details
1	Crane Capacity in kN	100
2	Crane bracket height in m	7.62
3	Crane span in m	13.3 +/-
4	Crane running length in m	75
5	Crane class	II (Normal duty)
6	Crane Type	Top running
7	Type of Girder	Double
8	Bridge Weight in MT	23
9	Hoist/Trolley Weight in MT	4.5
10	Number of Wheels	4
11	Wheel Load in MT	11.5
12	Wheel Base in mm	3500

Sr no.	Parameter	Details
1	Crane Capacity in kN	50
2	Crane bracket height in m	7.62
3	Crane span in m	13.3 +/-
4	Crane running length in m	75
5	Crane class	II (Normal duty)
6	Crane Type	Top running
7	Type of Girder	Double
8	Bridge Weight in MT	17.5
9	Hoist/Trolley Weight in MT	3
10	Number of Wheels	4
11	Wheel Load in MT	7.2
12	Wheel Base in mm	3200