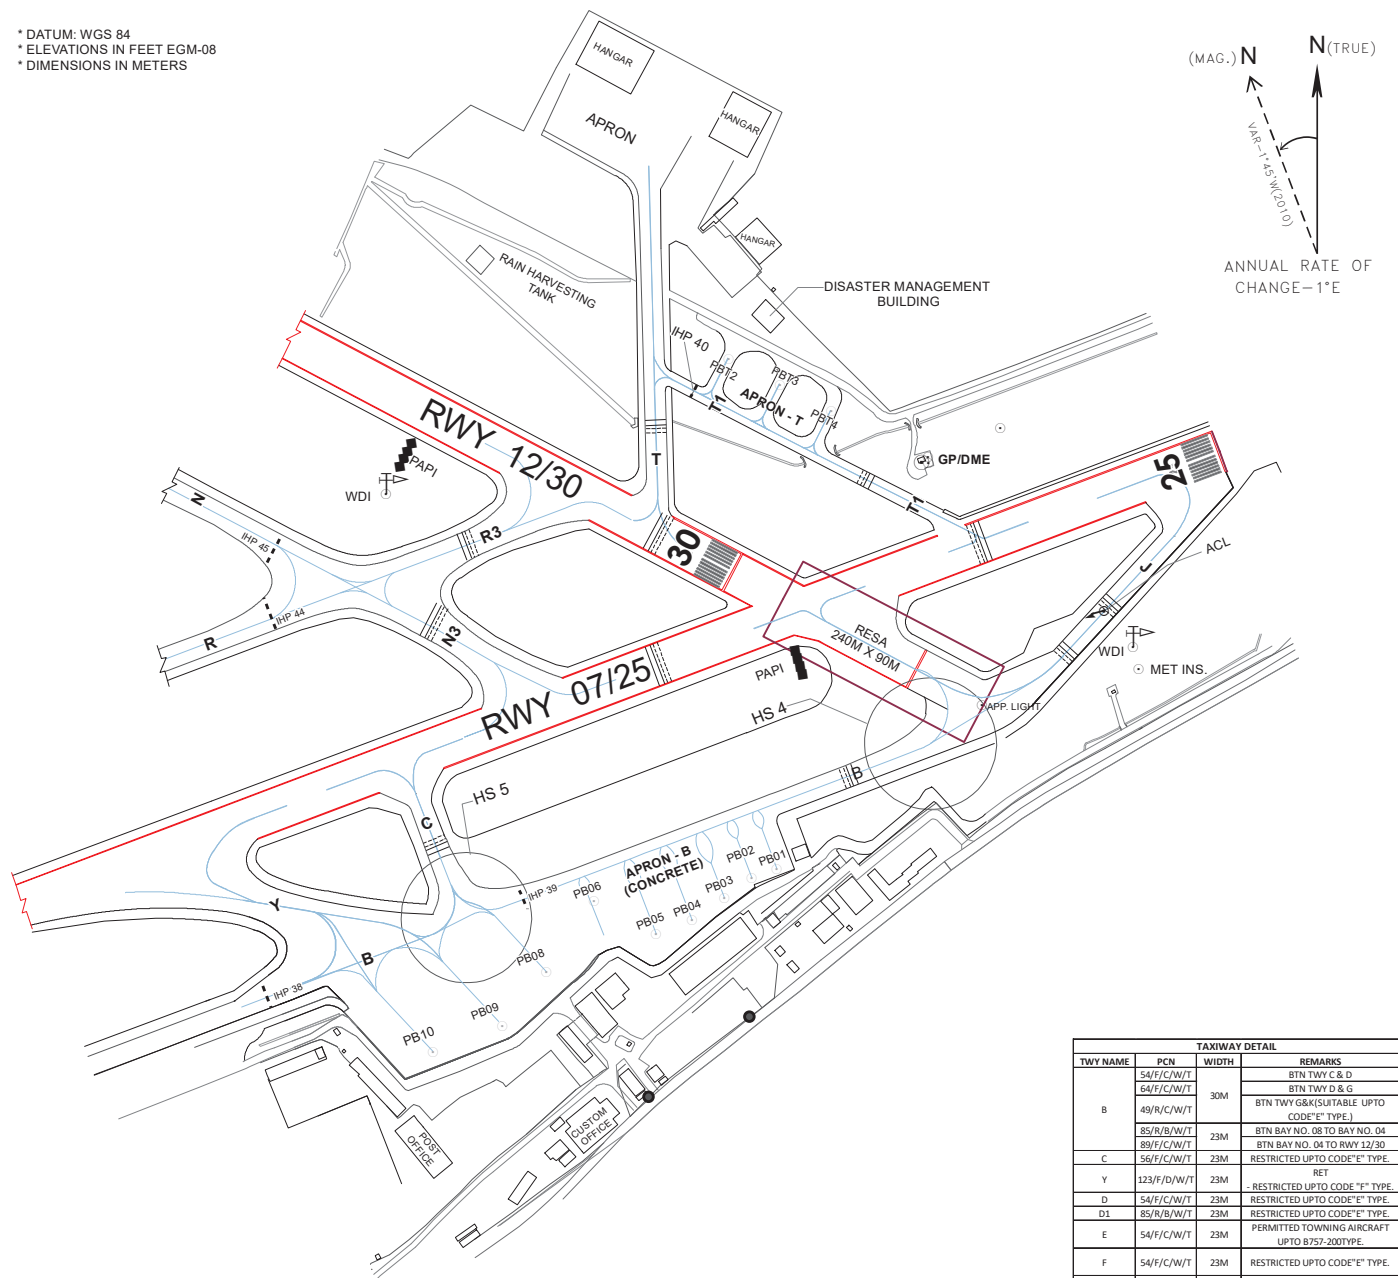


CHENNAI, INDIA

AIRCRAFT PARKING/
DOCKING CHARTAPRON ELEV 48ft.
APRON- B & TTWR 118.1
GND 121.9

CHENNAI INTL AIRPORT

* DATUM: WGS 84
* ELEVATIONS IN FEET EGM-08
* DIMENSIONS IN METERS

LEGENDS

AIRCRAFT STAND Nos.	PB 10
DVOR CHECK POINT	
RWY-HOLDING POSITION	
INTERMEDIATE HOLDING POINT	-----

APRON-B, BAY DETAIL

STAND NO.	CO-ORDINATE	SUITABILITY	PCN	ELEV.(ft.)	STATUS
PB-01	12°59'31.10703"N 080°10'48.52791"E	CODE "B" (LENGTH UPTO 24M)	40/R/B/W/T	47	POWER-IN/PUSH BACK
PB-02	12°59'30.77469"N 080°10'47.64485"E	CODE "B" (LENGTH UPTO 24M)	40/R/B/W/T	47	POWER-IN/PUSH BACK
PB-03	12°59'30.08852"N 080°10'46.68574"E	CODE "C" (LENGTH UPTO 30M)	68/R/B/W/T	46	POWER-IN/PUSH BACK
PB-04	12°59'29.30020"N 080°10'45.55517"E	CODE "C"	68/R/B/W/T	46	POWER-IN/PUSH BACK
PB-05	12°59'28.82907"N 080°10'44.30011"E	CODE "C"	68/R/B/W/T	46	POWER-IN/PUSH BACK
PB-06	12°59'29.95733"N 080°10'42.11443"E	CODE "B"	38/R/C/W/T	45	POWER-IN/PUSH BACK
PB-08	12°59'27.51458"N 080°10'40.46377"E	CODE "C"	75/R/C/W/T	46	POWER-IN/PUSH BACK
PB-09	12°59'25.66788"N 080°10'38.91786"E	CODE "E"	75/R/C/W/T	48	POWER-IN/PUSH BACK
PB10	12°59'24.74375"N 080°10'36.49125"E	CODE "E"	75/R/C/W/T	46	POWER-IN/PUSH BACK

APRON-T, BAY DETAIL

STAND NO.	CO-ORDINATE	SUITABILITY	PCN	ELEV.(ft.)	STATUS
PBT2	12°59'48.66100"N 080°10'46.77662"E	MAX W/S 16M	43/F/C/W/T	43	POWER-IN/PUSH BACK
PBT3	12°59'47.78118"N 080°10'48.58206"E	MAX W/S 16M	43/F/C/W/T	45	POWER-IN/PUSH BACK
PBT4	12°59'46.87206"N 080°10'50.39210"E	MAX W/S 16M	43/F/C/W/T	46	POWER-IN/PUSH BACK

TAXIWAY DETAIL			
TWY NAME	PCN	WIDTH	REMARKS
B	54/F/C/W/T	30M	BTN TWY C & D
	64/F/C/W/T		BTN TWY D & G
	49/R/C/W/T		BTN TWY G&H(SUITABLE UPTO CODE"E" TYPE.)
	85/R/B/W/T		BTN BAY NO. 08 TO BAY NO. 04
	89/F/C/W/T		BTN BAY NO. 04 TO RWY 12/30
C	56/F/C/W/T	23M	RESTRICTED UPTO CODE"E" TYPE.
Y	123/F/D/W/T	23M	RET
D	54/F/C/W/T	23M	RESTRICTED UPTO CODE"E" TYPE.
D1	85/W/B/W/T	23M	RESTRICTED UPTO CODE"E" TYPE.
E	54/F/C/W/T	23M	PERMITTED TOWNING AIRCRAFT UPTO 8757-200TYPE.
F	54/F/C/W/T	23M	RESTRICTED UPTO CODE"E" TYPE.
G	54/R/C/W/T	23M	RESTRICTED UPTO CODE"E" TYPE.
H	54/R/C/W/T	23M	BTN TWY E & D1 (RESTRICTED UPTO CODE"C" TYPE.)
APRON TAXI LANE	85/R/B/W/T		BTN TWY D1&K (RESTRICTED UPTO CODE"E" TYPE.)
J	77/R/C/W/T	23M	RESTRICTED UPTO CODE"E" TYPE.
K	80/R/C/W/T	23M	SUITABLE FOR CODE"F" TYPE.
L1	54/R/C/W/T	23M	RESTRICTED UPTO WINGSPAN OF 38M
L2	54/R/C/W/T	23M	RESTRICTED UPTO WINGSPAN OF 38M
L3	54/R/C/W/T	23M	RESTRICTED UPTO WINGSPAN OF 38M
M	89/F/C/W/T	23M	ANGULAR
	94/R/C/W/T		RESTRICTED UPTO CODE"E" TYPE.
N	85/R/B/W/T	25M	DISTANCE OF 232mts. FM THR OF RWY 25L
	92/R/B/W/T		EXIT SPEED MAX 40kt
N	85/R/B/W/T	25M	BETWEEN TWY P & Q, SUITABLE FOR UPTO CODE"F" TYPE.
N	92/R/B/W/T	25M	BETWEEN TWY Q & R, SUITABLE FOR UPTO CODE"F" TYPE.
N1	85/R/B/W/T	25M	RET- SUITABLE FOR UPTO CODE"F" TYPE.
N3	136/F/D/W/T 92/R/B/W/T	25M	110M FLEXIBLE 103M RIGID.
P	85/R/B/W/T	25M	SUITABLE FOR UPTO CODE"F" TYPE.
P1	85/R/B/W/T	25M	SUITABLE FOR UPTO CODE"F" TYPE.
Q1	85/R/B/W/T	25M	SUITABLE FOR UPTO CODE"F" TYPE.
Q1	85/R/B/W/T	25M	SUITABLE FOR UPTO CODE"F" TYPE.
Q2	85/R/B/W/T	25M	RESTRICTED UPTO CODE"C" TYPE.
R	85/R/B/W/T 92/R/B/W/T 77/R/C/W/T	25M	38M
R1	85/R/B/W/T	25M	BETWEEN TWY P & Q, SUITABLE FOR UPTO CODE"F" TYPE.
R3	136/F/D/W/T 92/R/B/W/T	25M	91M FLEXIBLE 135M RIGID
S	77/F/C/W/T 77/R/C/W/T	25M	66M FLEXIBLE 135M RIGID
T	95/R/C/W/T	22.5M	WING SPAN UPTO 29M.
T1	43/F/B/W/T	15M	OMGWS UPTO 0M WINGSPAN UPTO 18M.
Z	138/F/D/W/T	23M	SUITABLE UPTO CODE"E" OPERATIONS.