



SS-1010/SS-1010R/SS-2010 ●

Speaker Selector




## Speaker Selectors

TOA Speaker Selectors are designed to effectively select required speaker zones in a public address system and is ideal for small to medium-sized installation. Up to 10 speaker zones for paging and background music can be selected. For all models, in the situation where announcements have to be made to all zones, an All Call button can be selected to broadcast the message to all areas. For SS-1010 & SS-1010R previously selected BGM zones will be mute when paging is done to other zones. With the SS-2010, uninterrupted background music setup can be configured so that paging in one zone does not affect the background music in other zones.

### Features:

- DC 24 V operation
- LED indicator for each selector
- 1U 19" rack size
- 10 selectors for paging & background music for SS-1010R & SS-2010
- 1 selector for all call (paging)
- Protection against DC input overload and reversed DC polarity installation

### Connection Example

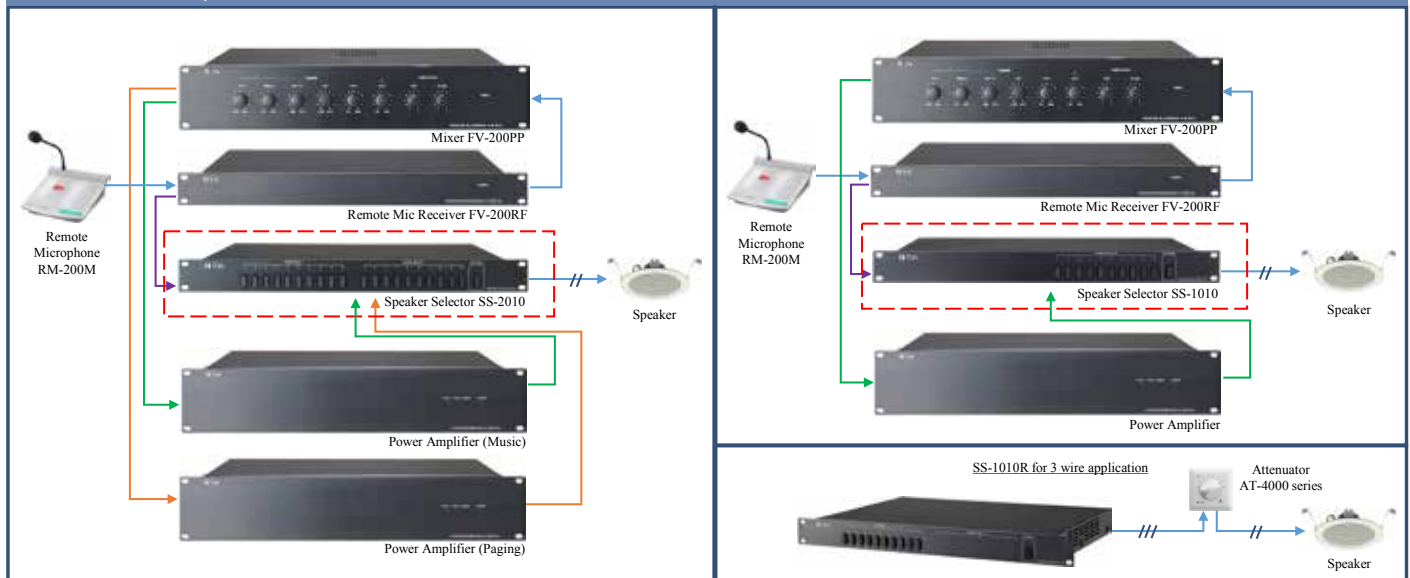

### Specifications

| Model                 | SS-1010 AS   | SS-1010R AS   | SS-2010 AS  |
|-----------------------|--|---|---|
| Voltage Source        | 24V DC   |   |   |
| Current Consumption   | 0.4 A DC   |   | 0.6 A DC  |
| Inputs                | 10 Inputs Zone<br>1 Emergency Override                                     | 10 Inputs BGM/Paging,<br>1 Link as Input/Output                   | 10 Inputs BGM<br>10 Inputs Paging   |
| Output                | 10 Outputs Zone<br>each zone max. output 480W                              | 10 Outputs with 3 wire R-H-C<br>each zone max. output 480W        | 10 Outputs<br>each zone max. output 480W at 100V line                       |
| Controls              | Front  | 10 Zone Selectors, 1 All Zone Selector                            | 10 BGM Selectors, 10 Paging Selectors<br>1 All Call Selector for All Paging |
|                       | Rear   | 1-10 Zone Controls In, All Zone Control In                        | 1-10 Paging Controls In, All Paging Control In                              |
| Indicator LED         | 10 Zone Selector LEDs<br>1 All Zone LED                                    | 10 BGM Selector LEDs<br>10 Paging Selector LEDs<br>1 All Call LED | 10 BGM Selector LEDs<br>10 Paging Selector LEDs<br>1 All Call LED           |
| Operating Temperature | 0°C to +40°C   |   |   |
| Finish                | Front Panel: Aluminum Hair Line, Etching Black<br>Case: Steel Plate, Black |   |   |
| Dimensions            | 482 (W) x 44 (H) x 320 (D) mm  |   |   |
| Weight                | 3.2kg  |   |   |
| Accessories           | 6P connectors (12pcs), 2P connector (1pc)                                  |   |   |

