

## WC Manual Flush Valve

## PRODUCT FEATURES



- Single flush operation
- Anti-corrosion & anti-rust S/S grade 304 cover panel
- Anti-theft design
- Easy installation and maintenance

## PRODUCT SPECIFICATION

- Installation type : Concealed box  
front accessible maintenance service
- Dimension (front panel) : 205 x 205mm
- Panel wall opening : 189 x 189mm
- Material (front panel) : Stainless steel 304, plastic frame
- Material (button) : Stainless steel 304, circular hairline
- Material (flush valve) : Brass
- Operating water pressure : 1.5-3 bars (dynamic)
- Discharge volume : Nominal 3.5 litres/ flush (full)



## TECHNICAL DRAWING

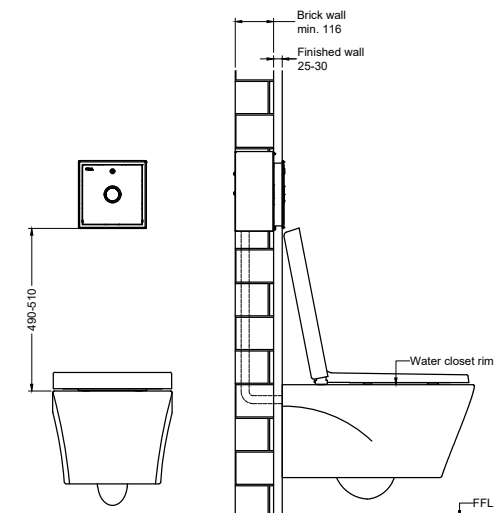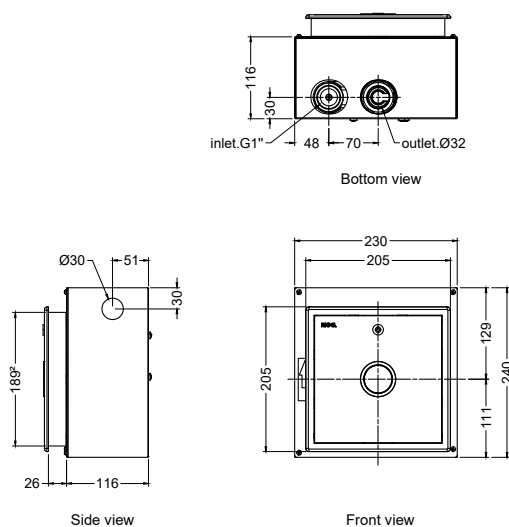

\*Note:

- 490-510 From bottom edge panel to water closet rim
- 700±30 From bottom edge panel to squat pan rim
- **Dimension may vary when WC bowl matches with manual / electronic bidet seat & cover**

( ) Denotes recommended value  
All dimension are in mm



C = 51, M = 0, Y = 9, K = 0



Pantone 2746

C = 100, M = 90, Y = 0, K = 0

Approx size: 8.3 cm x 10.5 cm

## Water Efficiency



Water Consumption: 3.50 L/flush (full)

Type of Product: Flush valves with water closet pans

Brand: Rigel

Model: RL-WP2913BF + W3-R-FC101M (1-8)

Registration No.: WCFV-2023/040096/SLS



Actual water consumption may vary from test results  
Compare all models at [www.pub.gov.sg](http://www.pub.gov.sg)