MODEL NUMBER		EB-L730U	EB-L630SU
SKU Number		V11HA25040	V11HA29040
Projection Technology		RGB liquid crystal shutter projection system (3LCD)	
Specifications of Main Parts			
LCD	Size	0.67" (C2 Fine)	
	Resolution	WUXGA	
	Aspect Ratio	16:10	
Projection Lens	Type	Optical Zoom (Manual) / Focus (Manual)	No optical zoom / Focus (Manual)
	F-Number	1.50 – 1.70	1.70
	Focal Length	20 – 31.8 mm	11.76 mm
	Zoom Ratio	1.0 - 1.60	1.0 - 1.35 (Digital Zoom)
	Throw Ratio	1.35 – 2.20 (Wide - Tele)	0.80 - 1.07 (Wide - Tele)
Lightsource	Type	Laser Diode	
	Life	20,000 hours (Normal) / 30,000 hours (Extended)	
Screen Size (Projected Distance)			
Zoom: Wide		50" - 500" [1.44 - 14.76 m]	50" - 200" [0.85 - 3.49 m]
Zoom: Tele		50" - 500" [2.35 - 23.84 m]	N/A
Brightness[*1]			
White Light Output (Normal / Extended)		7,000lm / 4,900lm	6,000lm / 4,200lm
Colour Light Output (Normal)		7,000lm	6,000lm
Contrast Ratio		Over 2,500,000:1	
Internal Speaker(s)			
Sound Output		10W Monaural	
Keystone Correction			
Projection Orientation		360° Free	
Vertical / Horizontal		±30° / ±30°	
Connectivity			
Analog RGB Input	D-Sub 15Pin	2	
Digital Input	HDMI	2 (HDCP 2.3)	
	HDBaseT	1 (HDCP 2.3)	
Audio Input	Stereo Mini Jack	2	
USB Input	USB Type A	2 (Port1 for PC Free, Firmware Update, Copy OSD Settings; Port2 for 5V/2A power supply only, no USB function)	
	USB Type B	1 (For Mouse, Keyboard, Control, Firmware Update)	
Control I/O	RS-232C	D-Sub 9pin x 1	
Analog Video Output	D-Sub 15Pin	1	
Digital Video Output	HDMI	1 (HDCP 2.3)	
Audio Output	Stereo Mini Jack	1	
Network	Wired LAN	RJ45 x 1 (100Mbps)	
	Wireless	Built-in	
	Optional Wireless	ELPAP11	
Wireless LAN (In-Built) and Screen Mirroring			
Supported Speed for Each mode		Infrastructure:	
		IEEE 802.11b (2.4GHz): 11 Mbps[*2], IEEE 802.11g (2.4GHz): 54 Mbps[*2], IEEE 802.11n (2.4GHz): 72.2 Mbps[*2], IEEE 802.11a (5GHz): 54 Mbps[*2], IEEE 802.11n (5GHz): 150 Mbps[*2], IEEE 802.11ac (5GHz): 325 Mbps[*2]	
		Access Point (Wi-Fi Direct):	
		IEEE 802.11g (2.4GHz): 54 Mbps[*2], IEEE 802.11n (2.4GHz): 72.2 Mbps[*2], IEEE 802.11a (5GHz): 54 Mbps[*2], IEEE 802.11n (5GHz): 150 Mbps[*2], IEEE 802.11ac (5GHz): 325 Mbps[*2]	
Supported Mode		Infrastructure, Access Point (Wi-Fi Direct)	
Supported Security Type		Infrastructure: OPEN (WPA2/WPA3-PSK/ WPA2/WPA3-EAP)	
		Supported EAP Type: PEAP, PEAP-TLS, EAP-TLS, EAP-Fast	
		Access Point (Wi-Fi Direct): WPA2-PSK (AES)	
Wireless LAN (Using Optional ELPAP11)			
Supported Speed for Each mode		Access Point (Wi-Fi Direct):	
		IEEE 802.11g (2.4GHz): 54 Mbps[*2], IEEE 802.11n (2.4GHz): 72.2 Mbps[*2], IEEE 802.11a (5GHz): 54 Mbps[*2], IEEE 802.11n (5GHz): 150.0 Mbps[*2], IEEE 802.11ac (5GHz): 325Mbps[*2]	
Supported Mode		Access Point (Wi-Fi Direct)	
Supported Security Type		Access Point (Wi-Fi Direct): WPA2-PSK (AES)	
Operating Temperature			
Single Use		Low Altitude (0 - 2,286m/7,500ft): 0 - 45 °C <32 - 113 °F>	
		High Altitude (Over 2,286m/7,500ft to 3,048m/10,000ft): 0 - 40 °C <32 - 104 °F>	
		20% - 80% Humidity, No Condensation	
Multi-projection Use		Low Altitude (0 - 2,286m/7,500ft): 0 - 40 °C <32 - 104 °F>	
		High Altitude (Over 2,286m/7,500ft to 3,048m/10,000ft): 0 - 35 °C <32 - 95 °F>	
		20% - 80% Humidity, No Condensation	
Operating Altitude		Over 1,500m/4,921ft with High Altitude Mode: 0 - 3,048m (0 -10,000ft)	
Direct Power On / Off		Yes	
Start-Up Period		8 seconds (Epson Logo); Warm-up Period: 30 sec	
Quick Start-Up		Less than 5 seconds (Display)	
Cool Down Period		Instant Off	
Air Filter	Type	Electrostatic Filter	
	Maintenance Cycle[*3]	20,000 hours (Normal) / 30,000 hours (Extended)	
Power Supply Voltage		100 - 240 V AC ±10%, 50/60 Hz	
Power Consumption (220 - 240V)			
Laser Diode On (Normal / Extended)		345 W / 258W	
Standby (Normal / Eco)		2.0W / 0.3W	
Dimension Excluding Feet (D X W X H)		304 x 440 x 122 mm	
Weight		Approx. 8.4kg	Approx. 8.4kg
Fan Noise (Normal / Eco)		38dB / 27dB	

*1 Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.
*2 These modes and actual data throughputs depend on supported wireless mode of source devices and/or environment conditions.
*3 When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m3). Based on the Epson's in-house test results.

Supplied Accessories
Power Cable: 3m
HDMI Cable: 1.8m
Remote Control: Yes, with Alkaline AA Battery
Cable cover
User Guide

Optional Accessories
Air Filter: ELPAF56
Wireless LAN unit: ELPAP11
Ceiling Mount: ELPMB22
HDBaseT Transmitter: ELPHD01
Safety Wire Set: ELPWR01
Wireless Presentation System: ELPWP10, ELPWT01

EB-L730U

EB-L630SU

COMPACT PROJECTION SOLUTION FOR ALL YOUR BUSINESS NEEDS.

WUXGA Resolution

Throw Ratio 0.80 - 1.07[*4]

Laser Light Source

Built-in Wireless[*2]

Flexible Installation

Edge Blending Technology

Wireless Projection

Optical Lens Shift[*4]

A power-packed solution for business, education, as well as projection signage and entertainment.

Epson's versatile and compact EB-L730U series projectors are loaded with endless possibilities to project vivid and sharp images of up to 7,000 lumens[*3] to your audience. Features such as center-lens placement, 360° installation, and a wide range of connectivity translates to a flexible and performance-focused projection solution to suit all your needs.

IT'S IN THE DETAILS.

WORLD'S N°2 PROJECTORS

3LCD

HDBT
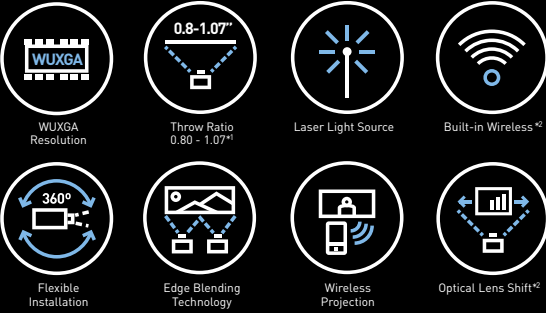
LASER LIGHT SOURCE

Superb Image Quality
High brightness projection of up to 7.000 lumens[*3] with laser light source and WUXGA resolution.

Compact & Flexible
Lightweight yet durable body with a myriad of installation options.

Seamless Connectivity
Enjoy convenience in projection via wireless connections without troublesome settings.

*1 For EB-L630SU. *2 Except for EB-L520U. *3 For EB-L730U.

Find out more at www.epson.com.sg/projectors

EpsonSEA   EpsonSEA   EpsonSEA   EpsonSoutheastAsia

Epson Singapore Pte Ltd   438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500
Epson Customer Care Center   100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours.

Massive and Brilliant.
Stunning images beyond FULL HD.

Immerse in a stimulating and dynamic viewing experience with WUXGA resolution. Captivate your audience in lectures and meetings, impress your customers in stores, and maximise your reach at larger venues.

Superb Resolution
WUXGA, 1920x1200

High Brightness
Up to 7,000 lumens[*1]

Large Screen Size
Up to 500"[*2]

High Contrast Ratio
Over 2,500,000:1

Laser Light Source
Up to 20,000[*3]
maintenance free hours

LASER
LIGHT SOURCE

Fascinate more with super-resolution

Project detailed and crisp images with the Image Enhancement function. With a few simple steps, deliver enthralling, clear projections and level up your presentations.

With super-resolution   Without super-resolution

Save both your wallet and the environment

Without the need for lamp replacements and lower power consumption than its peers, enjoy higher savings while saving the earth with Epson's laser projectors. Do more with your maintenance-free laser projector, which runs on approximately 20,000 hours[*3] of laser light source.

Maintenance period of laser and lamp[^]

Laser

Lamp[+]

0 hours (new)   Maintenance period   20,000 hours
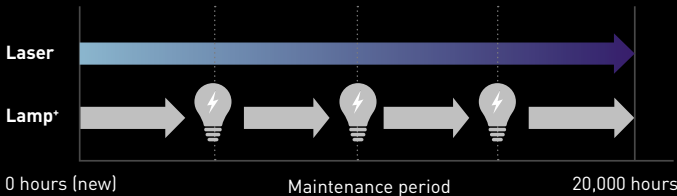
Eco Features
- Uses just 0.3W of power in standby mode
- Projector optics employ lead-free lenses
- Unpainted plastic housing reduces the environment impact
- The flame retardants used in the plastic housing does not contain chlorine or bromine
- Laser light technology* eliminates the need for lamp replacements

*1 For EB-L730U. Brightness for EB-L630U is 6,200 lumens, EB-L630SU is 6,000 lumens, EB-L520U is 5,200 lumens.
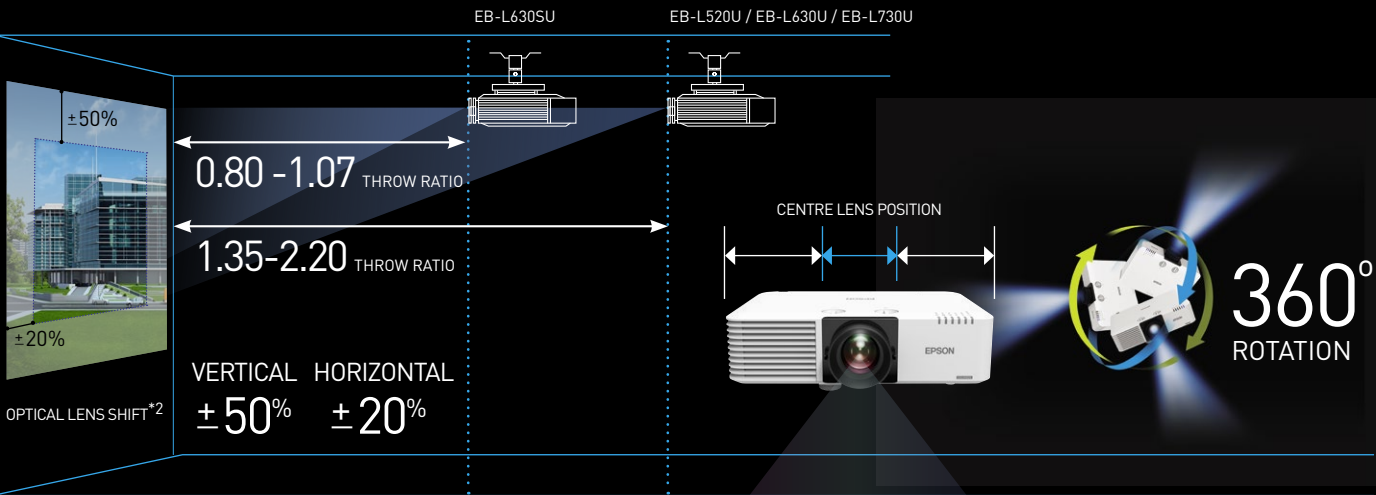*2 Except EB-L630SU. Maximum screen size for EB-L630SU is 200 inch.
*3 20,000H life for Laser light source: Approximate time until brightness decreases 50% from first usage. Measured by acceleration text assuming use of 0.04 - 0.20 mg/m3 of particulate matter. Time varies depending on usage conditions and environments. Replacement of parts other than the light source may be required in a shorter period.

[+] Compared with other conventional lamp projector that has lamp life of 5,000 hours.
[^] Approximate time until brightness decreases 50% from first usage. Measured by acceleration test assuming use of 0.04 - 0.20 mg/m^3 of particulate matter. Time varies depending on usage conditions and environments.

Better Products for a Better Future™
For more information on Epson's environmental programmes, visit http://global.epson.com/SR/environment.

Efficiency meets Flexibility.
Fuss-free installation and operation.

With a wide range zoom of up to 1.6x zoom ratio[*1] and flexible 360° installation, you can fit the compact Epson laser projector even in the tightest spaces, without compromising image quality. Alongside its versatile connectivity, maximise efficiency in meeting rooms and enhance the experience in retail storefronts.

EB-L630SU   EB-L520U / EB-L630U / EB-L730U

±50%

0.80 –1.07 THROW RATIO

1.35–2.20 THROW RATIO

±20%

OPTICAL LENS SHIFT[*2]

VERTICAL ±50%   HORIZONTAL ±20%

CENTRE LENS POSITION

360° ROTATION

Seamless multiple projection

Blend multiple projections seamlessly and easily into one large screen for maximum reach through Daisy-chaining with HDMI-out port. Correct any screen distortion quickly with the built-in geometric correction and edge blending function.

Customisable content playback

Create personalised content easily onto any desired surface with the built-in playback function. Upload your content wirelessly or simply connect and start projecting fuss-free. Ideal for projection signage at storefronts or places of interest.

Wide Range Zoom & Lens Shift
Up to 1.6x zoom ratio[*1]

Flexible Installation
Any direction in 360°

Short Throw Capability[*3]
80" screen at 1.38m
Perfect for tight spaces

Versatile Connectivity
2 x HDMI & HDBaseT for
long distance transmission[*4]

HDMI   HDBT

[*1] Except EB-L630SU with no optical zoom, only 1.35x digital zoom.
[*2] Except for L520U which has no lens shift.
[*3] For EB-L630SU only.
[*4] HDBaseT can transmit Full HD video, audio and control at low cost through cat 5e/6 cables or higher, up to 100 metres. Ideal for large venues.
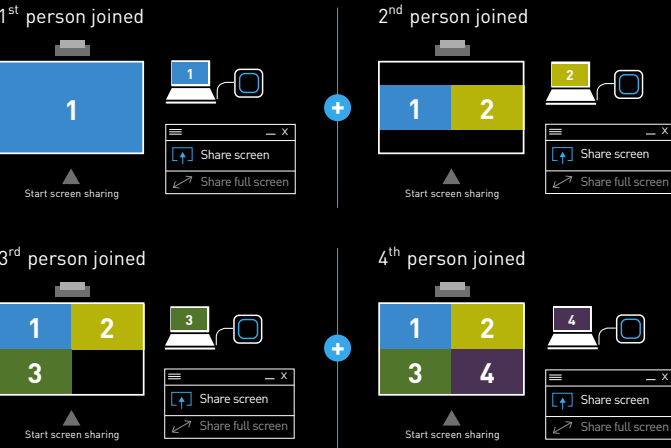
Retail signages   Event signages

Connectivity Reinvented.
Seamless collaborations without hassle.

Reinvent how collaborations happen in your meeting rooms with the optional **ELPWP10 wireless presentation system**. No more messy cables, additional installations and confusing network settings. Connect up to six users and project up to 4 connected devices in one screen simultaneously for enhanced collaboration.

Connect up to six different users at any one time. Click on share screen and the screen will split automatically.

1st person joined

| 1 |

▲ Start screen sharing
↪ Share screen
↪ Share full screen

2nd person joined

| 1 | 2 |

▲ Start screen sharing
↪ Share screen
↪ Share full screen

3rd person joined

| 1 | 2 |
| 3 | |

▲ Start screen sharing
↪ Share screen
↪ Share full screen

4th person joined

| 1 | 2 |
| 3 | 4 |

▲ Start screen sharing
↪ Share screen
↪ Share full screen

Project wirelessly

With built-in wireless connectivity, easily share content from your smart devices or PC using the Epson iProjection app.

Schedule and edit your playlist, convert movie formats, and manage data directly through Epson Content Manager.

Epson Projector Content manager

Epson iProjection

Miracast support

With Miracast, you can now project Full HD videos and content wirelessly from compatible smart devices and laptops without additional software installation. With the screen mirroring* support, projecting from your smart devices has never been easier.

* If the Miracast function is activated, other network features will be disabled.

Miracast

SPECIFICATIONS

MODEL NUMBER		EB-L520U	EB-L630U
SKU Number		V11HA30040	V11HA26040
Projection Technology		RGB liquid crystal shutter projection system (3LCD)	
Specifications of Main Parts			
LCD	Size	0.67" (C2 Fine)	
	Resolution	WUXGA	
	Aspect Ratio	16:10	
Projection Lens	Type	Optical Zoom (Manual) / Focus (Manual)	
	F-Number	1.50 – 1.70	
	Focal Length	20 – 31.8 mm	
	Zoom Ratio	1.0 - 1.60	
	Throw Ratio	1.35 – 2.20 (Wide - Tele)	
Lightsource	Type	Laser Diode	
	Life	20,000 hours (Normal) / 30,000 hours (Extended)	
Screen Size (Projected Distance)			
Zoom: Wide		50" - 500" [1.44 - 14.76 m]	
Zoom: Tele		50" - 500" [2.35 - 23.84 m]	
Brightness[*1]			
White Light Output (Normal / Extended)		5,200lm / 3,640lm	6,200lm / 4,340lm
Colour Light Output (Normal)		5,200lm	6,200lm
Contrast Ratio		Over 2,500,000:1	
Internal Speaker(s)			
Sound Output		10W Monaural	
Keystone Correction			
Projection Orientation		360° Free	
Vertical / Horizontal		±30° / ±30°	
Connectivity			
Analog RGB Input	D-Sub 15Pin	2	
Digital Input	HDMI	2 (HDCP 2.3)	
Audio Input	Stereo Mini Jack	2	
USB Input	USB Type A	1 (For PC Free, Firmware Update and Copy OSD Settings)	2 (1 Port for PC Freem Firmware Update and Copy OSD Settings. Another port is for 5V/2A power supply, no USB function)
	USB Type B	1 (For Mouse, K/B, Control and Firmware Update)	
Control I/O	RS-232C	D-Sub 9pin x 1	
Analog Video Output	D-Sub 15Pin	1	
Digital Video Output	HDMI	N/A	1 (HDCP 2.3)
Audio Output	Stereo Mini Jack	1	
Network	Wired LAN	RJ45 x 1 (100Mbps)	
	Built-in Wireless	N/A	Yes
	Optional Wireless	ELPAP11	
Wireless LAN (In-Built) and Screen Mirroring			
Supported Speed for Each mode		N/A	Infrastructure: IEEE 802.11b (2.4GHz): 11 Mbps[*2], IEEE 802.11g (2.4GHz): 54 Mbps[*2], IEEE 802.11n (2.4GHz): 72.2 Mbps[*2], IEEE 802.11a (5GHz): 54 Mbps[*2], IEEE 802.11n (5GHz): 150 Mbps[*2], IEEE 802.11ac (5GHz): 325 Mbps[*2] Access Point (Wi-Fi Direct): IEEE 802.11g (2.4GHz): 54 Mbps[*2], IEEE 802.11n (2.4GHz): 72.2 Mbps[*2], IEEE 802.11a (5GHz): 54 Mbps[*2], IEEE 802.11n (5GHz): 150 Mbps[*2], IEEE 802.11ac (5GHz): 325 Mbps[*2]
Supported Mode		N/A	Infrastructure, Access Point (Wi-Fi Direct)
Supported Security Type		N/A	Infrastructure: OPEN (WPA2/WPA3-PSK/ WPA2/WPA3-EAP) Supported EAP Type: PEAP, PEAP-TLS, EAP-TLS, EAP-Fast Access Point (Wi-Fi Direct): WPA2-PSK (AES)
Wireless LAN (Using Optional ELPAP11)			
Supported Speed for Each mode		Access Point (Wi-Fi Direct): IEEE 802.11g (2.4GHz): 54 Mbps[*2], IEEE 802.11n (2.4GHz): 72.2 Mbps[*2], IEEE 802.11a (5GHz): 54 Mbps[*2], IEEE 802.11n (5GHz): 150.0 Mbps[*2], IEEE 802.11ac (5GHz): 325Mbps[*2]	
Supported Mode		Access Point (Wi-Fi Direct)	
Supported Security Type		Access Point (Wi-Fi Direct): WPA2-PSK (AES)	
Operating Temperature			
Single Use		Low Altitude (0 - 2,286m/7,500ft): 0 - 45 °C <32 - 113 °F> High Altitude (Over 2,286m/7,500ft to 3,048m/10,000ft): 0 - 40 °C <32 - 104 °F> 20% - 80% Humidity, No Condensation	
Multi-projection Use		Low Altitude (0 - 2,286m/7,500ft): 0 - 40 °C <32 - 104 °F> High Altitude (Over 2,286m/7,500ft to 3,048m/10,000ft): 0 - 35 °C <32 - 95 °F> 20% - 80% Humidity, No Condensation	
Operating Altitude		Over 1,500m/4,921ft with High Altitude Mode: 0 - 3,048m (0 -10,000ft)	
Direct Power On / Off		Yes	
Start-Up Period		8 sec (Epson Logo); Warm-up Period: 30 sec	
Quick Start-Up		Less than 5 seconds (Display)	
Cool Down Period		Instant Off	
Air Filter	Type	Electrostatic Filter	
	Maintenance Cycle[*3]	20,000 hours (Normal) / 30,000 hours (Extended)	
Power Supply Voltage		100 - 240 V AC ±10%, 50/60 Hz	
Power Consumption (220 - 240V)			
Laser Diode On (Normal / Extended)		293 W / 223W	345 W / 258W
Standby (Normal / Eco)		2.0W / 0.3W	
Dimension Excluding Feet (D X W X H)		304 x 440 x 122 mm	
Weight		Approx. 7.7kg	Approx. 8.4kg
Fan Noise (Normal / Eco)		31dB / 27dB	38dB / 27dB

[*1] Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.
[*2] These modes and actual data throughputs depend on supported wireless mode of source devices and/or environment conditions.
[*3] When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m3). Based on the Epson's in-house test results.

Supplied Accessories
Power Cable: 3m
HDMI Cable: 1.8m
Remote Control: Yes, with Alkaline AA Battery
Cable cover (Only for EB-L630U)
User guide

Optional Accessories
Air Filter: ELPAF56
Wireless LAN unit: ELPAP11
Ceiling Mount: ELPMB22
HDBaseT Transmitter: ELPHD01
Safety Wire Set: ELPWR01
Wireless Presentation System: ELPWP10, ELPWT01

EB-L520U

EB-L630U

Dealer's Stamp

Information correct at time of printing.
Printed April 2021

Find out more at **www.epson.com.sg/projectors**

EpsonSEA   EpsonSEA   EpsonSEA   EpsonSoutheastAsia

Epson Singapore Pte Ltd   438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500
Epson Customer Care Center   100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours.