

Project Name

:

Construction of 9 Buildings And A&A Works to 2 Buildings along Sembawang Road

Luminaire Model

:

C188-4473 recessed step light

L14B

### General Description


IP65 wall recessed mounted light suitable for outdoor application. System wattage: 8W - 3000K LED **Black housing**. Integral driver. Supplied with PVC recess box for easy mounting and maintenance.

### General Appearance


Luminaire Picture



Dimensions (in mm)

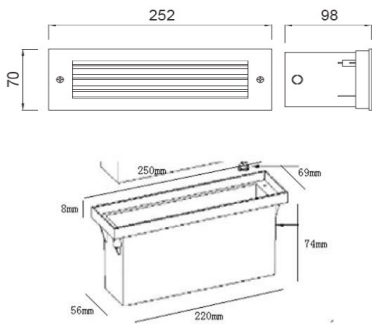

Polar Diagram

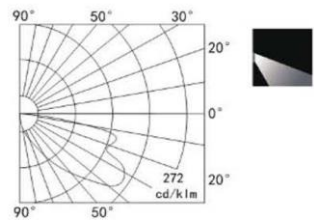

### TECHNICAL SPECIFICATIONS

Light Source	LED	Driver	Fixed Output
Power	8W	Control	NO
Luminous Flux	680lm	Installation	Recessed mounted
Luminous efficacy (lm/W):	85lm/W	IP Rating IK Code	IP65 IK08
ColorTemperature CCT	<b>3000K</b>	Material and Housing	Tempered glass diffuser, Die-Cast Aluminum Housing. Front cover with anti-glare louvre
Color Rendering Index (CRI)	>80	Weight:	1.2Kgs
Input Voltage	220-240V/50-60Hz	Dimension L x H x D(mm):	252 x 70 x 98
Operating Temperature	- 20°C ~ 40°C	Lifetime	50,000 hours (70% lumen maintenance @ Ta = 25°C)
		Country Of Origin	CHINA