

Urinal Sense Flush Valve – Concealed Box

PRODUCT FEATURES

- Automatic infra-red sensor activation urinal flush valve
- Heavy duty S/S grade 304 cover plate with satin finish
- Automatic sensor adjustment on installation
- Piston valve with build-in stainless steel strainer for screening out the debris and self-cleaning solenoid
- Electrical sensor is isolated and sealed in waterproof compartment
- Manual override button incorporated

PRODUCT SPECIFICATIONS

- Dimension : 144 (L) x 144 (H) mm
- Material : Brass casting flush valve with stainless steel satin finish panel
- Power Supply : 230VAC 50Hz
- Water Supply : BSPT G 1/2"
- Detection Time : 7 seconds minimum
- Detection Range : Self-adjusting to environment
- Operating Temperature : 0-40° C
- Supply Pressure : 100 kPa (flowing) – 800 kPa
- Trap Seal Protection : Automatically flush once every twelve (12) hours of non-use (optional)

DISCHARGE VOLUME

- WELS Rating : Excellent ✓✓✓
- Discharge Volume : 0.5L/flush
- Water Saving : 73%



RESOURCEFUL FEATURES:



Hold-Flow
Flushing



Auto-Adjust
Sensing




RC1000
Remote Control




Build in Manual
Overriding Button

TECHNICAL DRAWING

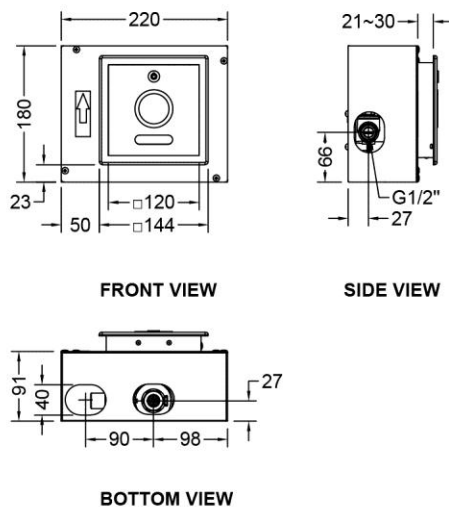

INSTALLATION DETAILS

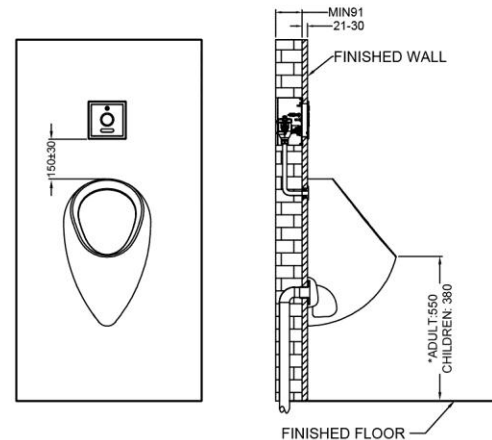

STANDARD (*)

550 (ADULT) : Height from the finished floor surface to the front rim of bowl.
380 (CHILDREN) : Height from the finished floor surface to the front rim of bowl.