

Project Name : Construction of 9 Buildings And A&A Works to 2 Buildings along Sembawang Road

Luminaire Model : Philips BN398X LED40/840 LI 200 LI W OP

L7

General Description


GreenPerform batten BN398C is a cost competitive linear solution with good performance and multiple lumen output for retail and industry applications. It offers surface mount and suspension installations to cater for different mounting options. Its multiple optic designs accommodate different applications as well.

General Appearance


Luminaire Picture



Dimensions (in mm)

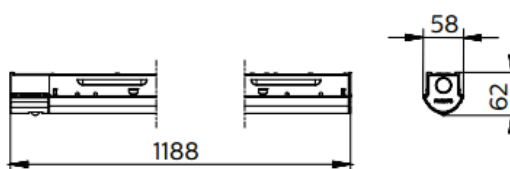

Polar Diagram



TECHNICAL SPECIFICATIONS

Light Source	LED	Driver	Fixed Output
Power	29W	Dimming	NO
Luminous Flux	4000lm	Control	NO
Luminous efficacy (lm/W):	138lm/W	Installation	Surface mounted and suspended Standalone
Color Temperature (CCT)	4000K	IP Rating	IP20
Color Rendering Index (CRI)	>80	Material and Housing	SPCC housing, 0.6mm thickness PMMA cover
Power Factor	0.9	Weight:	1.7kgs
Operating Temperature	-20°C ~ 40°C	Dimensions (mm)	(L) 1188 x (W) 58 X (H) 62
Optics	Frosted Cover	Lifetime	50,000 hours 70% lumen maintenance @ Ta = 25°C
		Country of Origin	CHINA