




- Compact size condenser controlled regulator
- 5-speed selection
- Thermal fuse preventing overheating
- Safety wire and cut-off safety switch provided
- Fall prevention of blade adopted



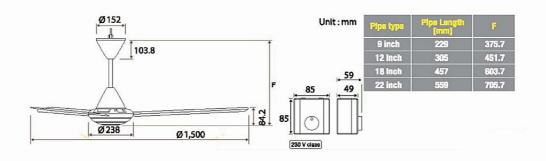

MS60S	G

WATTAGE	R.P.M	AIR VELOCITY	AIR DELIVERY
low high	low high	m/min. ft/min.	m³/min. ft³/min.
16 71	97 233	160 525	225 7,945

WEIGHT