



Setting up the Philips display and a digital signage player / Change Lingerie store

- 1 Connect devices to the electricity socket: display with the attached power cord.
- 2 Connect Digital Signage Player with the attached power supply. The device will start automatically after connecting the power supply
- 3 Connect Digital Signage Player to the display, using an HDMI cable. If possible please select HDMI 1 input. If not, please select HDMI 2.
- 4 Connect DS Player to the internet with LAN cable. The IP address will be obtained automatically
- 5 Turn the display ON and select source HDMI 1/HDMI 2.
Use button „Source“ on the remote or the control panel at the back of the screen.

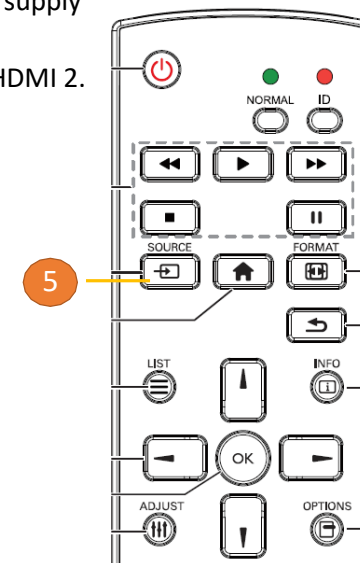

Technical Support: make sense media. Call: +48223308700 / +48605275225 / Mail: change@msmg.eu / Business hours 0800-1800 CET

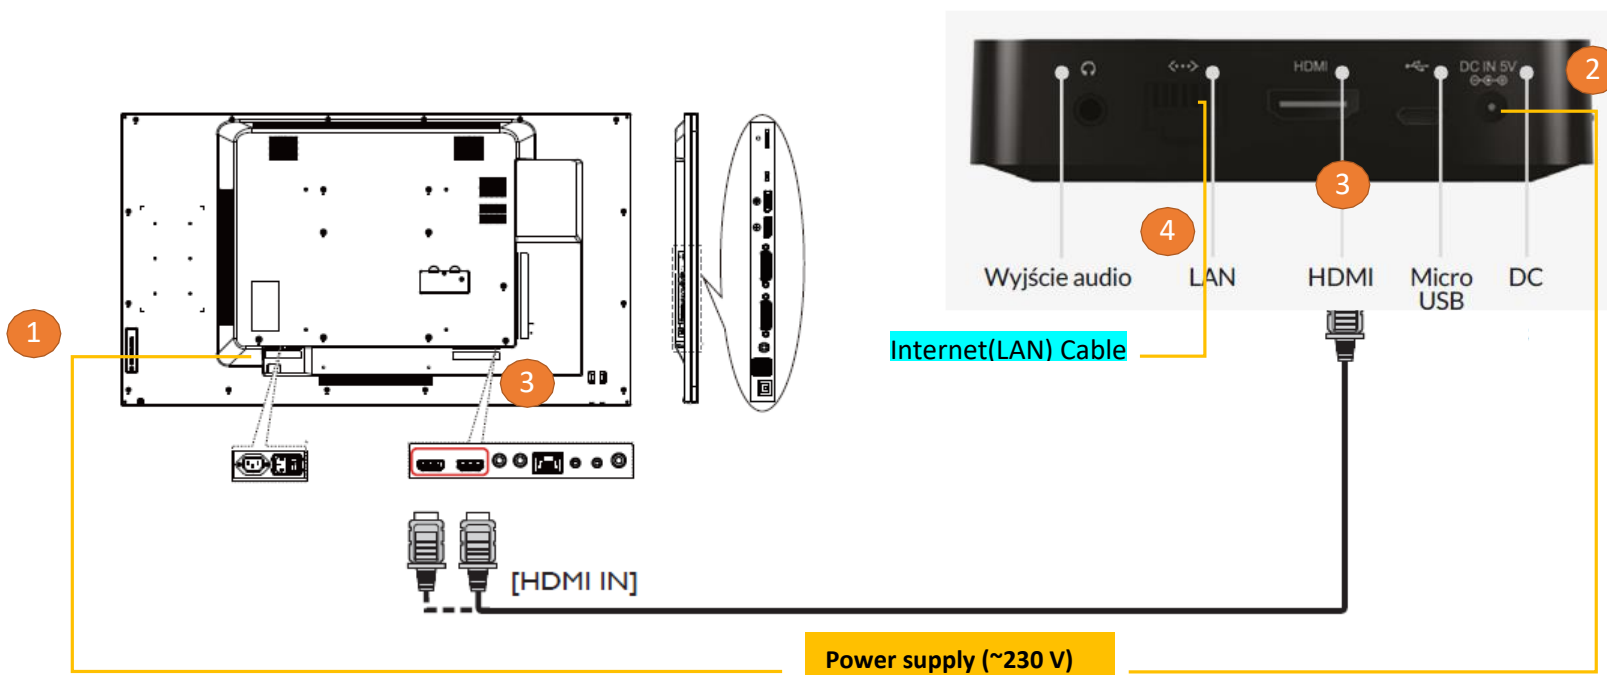