FB4 NS* | SINGLE & DOUBLE HINGED DOOR

FTHE 0040 | Bulletproof FB4 NS (in accordance with EN 1522-1523)
Hinge side attack or non-hinge side


*NS : non splitting

Bulletproof

HINGED DOOR
METAL+INSIDE
MORTARED FRAME

Tests carried out by the BNE
Banc National d'Epreuve Saint-Etienne

All Heinen doors are constructed on the basis of the METAL+ concept, lending them superior basic performance standards.

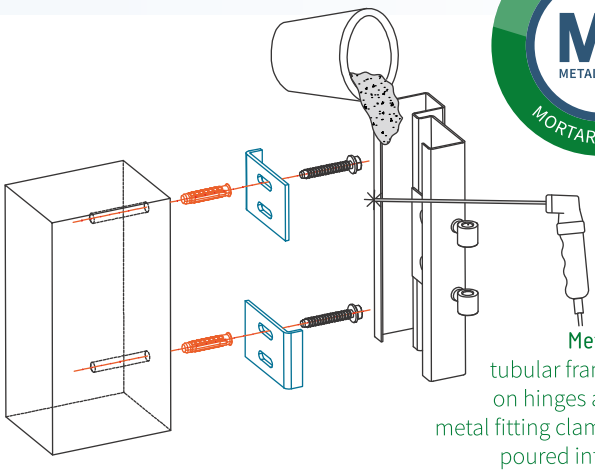


Metal+ construction:
tubular framework, screwed on hinges and metal sheets, metal fitting clamps to be welded, poured into sealing mortar.


Basic performance features of the FB4 NS door:

- Bulletproof (EN 1522-1523)
  FB4 NS (FB4 S if glazing)
- Burglary resistance (EN 1627-1630)
  RC3
- Acoustic performance
  Basic soundproofing:
  - single door RW = 30dB
  - double door RW = 27dB
- Frequency of use
  200,000 open/close cycles
- Mechanical resistance
  M4 (max. level)
- Service life of the door
  15-year warranty on the door set

Possible combinations: Burglary resistant · Fire resistance · Anti-panic

CROSS SECTION FB4 NS DOOR (DRHE 0040)

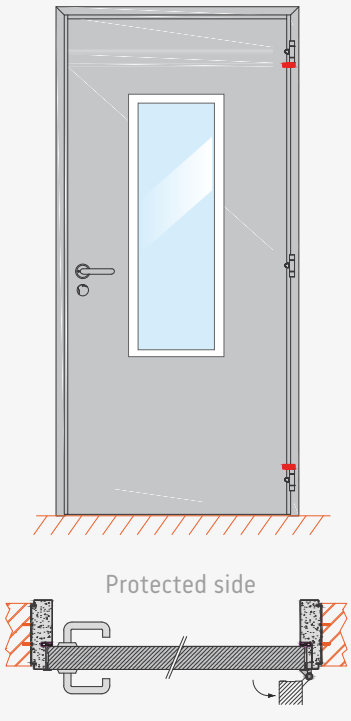

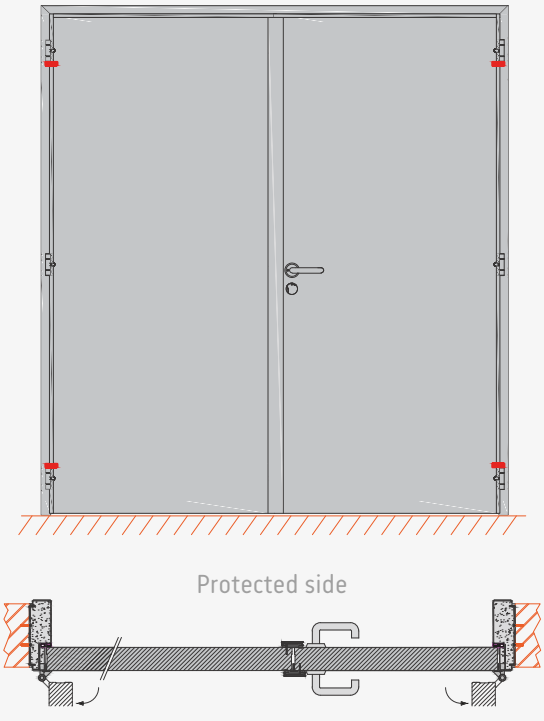

DOOR DIMENSIONS *(always customised)*

Single door

Maximum dimensions	Width	Height
Leaf	1450	3035
Opening	1560	3113

Minimum dimensions	Width	Height
Leaf	700	600
Opening	810	678

Calculation of clear passage (excluding combinations):
FP 180° = Width of opening - 140
FP 90° = Width of opening - 210
FP = Height of opening - 90

Double door

Maximum dimensions	Width	Height
Leaf	1450	3035
Opening	3020	3113


Minimum dimensions	Width	Height
Leaf	400	900
Opening	920	978

Calculation of clear passage (excluding combinations):
FP 180° = Width of opening - 140
FP 90° = Width of opening - 280
FP = Height of opening - 90

Construction support with a minimum thickness of 100 mm.
On request, larger / smaller doorsets are also available without a certificate, this is also valid for the wall thicknesses.

SECURITY LOCKS

Mechanical systems



Security (1 and 3 points)
Anti-panic (1 and 3 points)

Manual locking


ABLOY EL 160 , **EL360**
Self-Security (1 and 3 points)
Dorma PHA 2500

Automatic locking

ABLOY DORMA

Fail secure: operation by power supply.
Fail safe: operation by power cut.

Electrical systems with automatic locking



ABLOY EL560 , **EL561**
Controlled entry: Fail safe or Fail secure.
Free anti-panic exit or controlled exit
(Fail idem entry side).

Overlock (in combination with
Self-Security 1 or 3 points).
Controlled entry: Fail secure.
Free anti-panic exit or controlled exit
(Fail secure).

Solenoid locks


ABLOY EL518 , **EL520**
Controlled entry: Fail secure.
Free anti-panic exit or controlled exit
(Fail secure).


ABLOY EL532
Controlled entry: Fail secure.
Controlled exit: Fail safe.


Motorised locks


WINDOW CONFIGURATIONS


Solid or glazed + lateral and upper fanlights. Standard sizes or customised windows.

TYPE 1 

TYPE 2 

TYPE 3 

TYPE 4 

TYPE SM 

DETAILS OF MAIN COMBINATIONS

Burglary resistance


Tests carried out by the CNPP.
RC4 - RC5 (EN1627 to 1630).

Fire resistance


Contact us.


Anti-panic

Pushbar or handle.

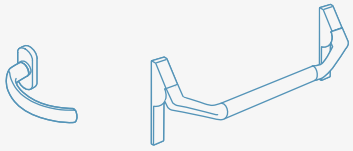

FITTINGS

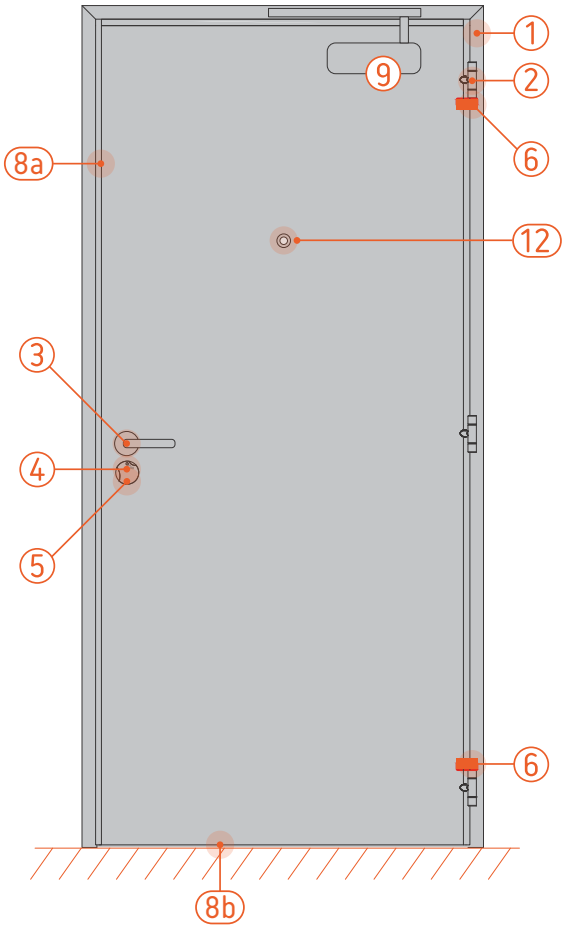

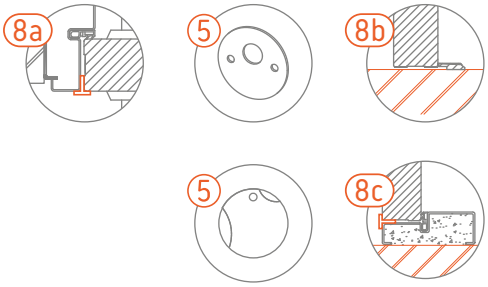

BASIC FITTINGS

1 | **Door frame and leaf finish**
Magnelis® Hot-dip galvanised ZM 250 steel (250g/m², 20µm thick).

2 | **Hinges**
Minimum three screwed steel hinges, adjustable and replaceable.

3 | **Handles**
A set of two U-shaped aluminium handles.

4 | **Europrofil cylinder**
EN 1627 compliant (class 4.1 in accordance with EN 1303).

5 | **Backplate**
Stainless steel backplate with round hole + bulletproof backplate.

6 | **Security stud system**
2 studs.

7 | **Lock**
Security 1 point.

8 | **Latch protection system**
a. Hinge side: T.
b. Bulletproof Doorbottom seal, if non-hinge side attack, only the 4-sided threshold
c. 4-sided frame (4C(B)) if attack on the opposite the hinge side (recess-mountable, max. 20 mm).

OPTIONAL FITTINGS

1 | **Door frame and leaf finish**
Stainless steel 304, 316 or RAL paint.

2 | **Hinges**
One or more hinges can be added; these are always adjustable and replaceable.
Stainless steel.

3 | **Handles**
Handles, doorknobs, pull handles etc. In aluminium or stainless steel.

9 | **Door closer**
With scissor arm or sliding arm, fitted on the hinge or non-hinge side, with or without closure selectors, open position maintained etc.

8 | **Latch protection system**
c. 4-sided frame (4C(B)) (recess-mountable, max. 20 mm).

10 | **Security Locks**
See locks.

11 | **Remote surveillance**
Indication of leaf position, locking latch position, indication of leaf status.

12 | **Standard peephole**

13 | **Various options**
Soundproof doorsills, door stops, storm chains, impact plates and many other fittings...

Heinen doors can combine performance features on a bespoke basis. Depending on your needs, one or more performance features are added to the basic, robust Metal+ door. Some performances are only available with the welded and mortar filled installation method.



Heinen

www.heinen-doors.com

For BIM files, please consult us. Our products are certified CE

Copyright © Heinen 2024 | Non-contractual document.