FB7 NS* | SINGLE & DOUBLE HINGED DOOR


FTHE 0044 | Bulletproof FB7 NS (in accordance with EN 1522-1523)
Hinge side attack

*NS : non splitting

Bulletproof

Tests carried out by the BNE

All Heinen doors are constructed on the basis of the METAL+ concept, lending them superior basic performance standards.

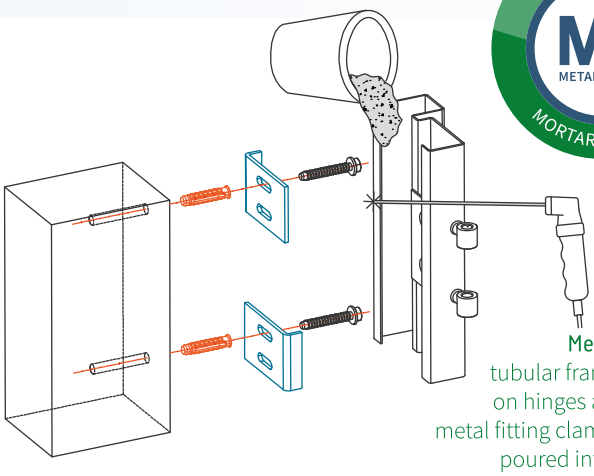


Metal+ construction:
tubular framework, screwed on hinges and metal sheets, metal fitting clamps to be welded, poured into sealing mortar.

Basic performance features of the FB7 NS door:

- Bulletproof (EN 1522-1523)
  FB7 NS
- Acoustic performance
  Basic soundproofing:
  - single door RW = 30dB
- Frequency of use
  200,000 open/close cycles
- Mechanical resistance
  M4 (max. level)
- Service life of the door
  15-year warranty on the door set

Possible combinations: ● Fire resistance ● Anti-panic

CROSS SECTION FB7 NS DOOR (DRHE 0044)

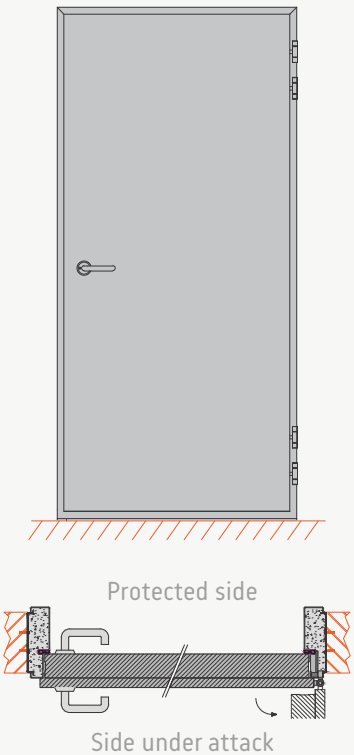

DOOR DIMENSIONS *(always customised)*

Single door

Maximum dimensions	Width	Height
Leaf	1350	2950
Opening	1460	3068


Minimum dimensions	Width	Height
Leaf	400	600
Opening	510	718

Calculation of clear passage (excluding combinations):
PL 180° = Width of opening - 140
PL 90° = Width of opening - 180
PL = Height of opening - 150

Construction support with a minimum thickness of 200 mm.
On request, larger / smaller doorsets are also available without a certificate, this is also valid for the wall thicknesses.

SECURITY LOCKS

Mechanical systems



Security (1 and 3 points)
Anti-panic (3 points)

Manual locking


Self-Security (1 and 3 points)

Automatic locking

ABLOY

Fail secure: operation by power supply.
Fail safe: operation by power cut.

Electrical systems with automatic locking



Overlock (in combination with Self-Security 1 or 3 points).
Controlled entry: Fail secure.
Free anti-panic exit or controlled exit (Fail secure).

Solenoid locks

ABLOY EL518, EL520
Controlled entry: Fail secure.
Free anti-panic exit or controlled exit (Fail secure).

ABLOY EL532
Controlled entry: Fail secure.
Controlled exit: Fail safe.

Motorised locks


DETAILS OF MAIN COMBINATIONS

Fire resistance


Contact us.


Anti-panic

Pushbar or handle.
Cannot be combined with glazing.

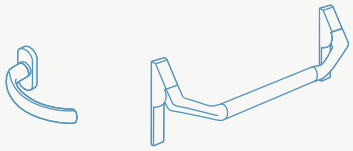

FITTINGS

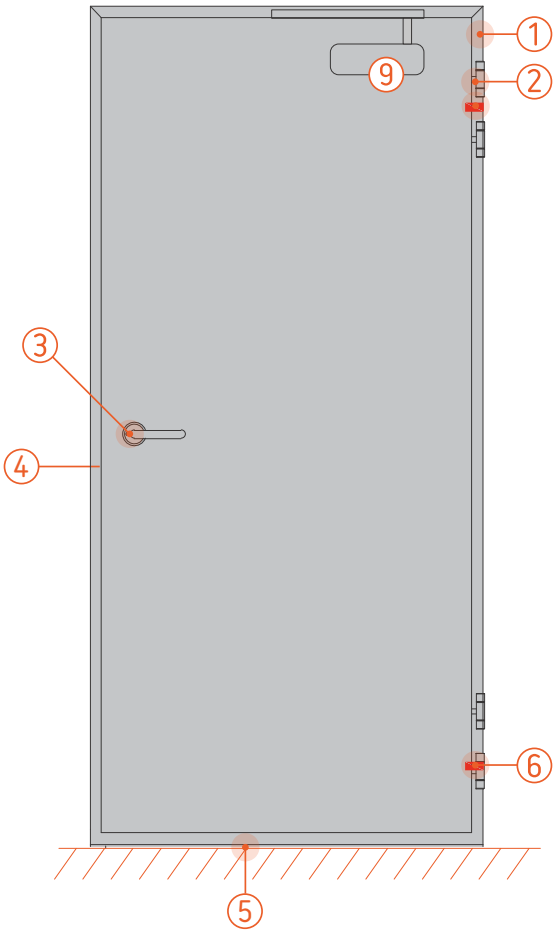



BASIC FITTINGS

1 | Door frame and leaf finish
Magnelis® Hot-dip galvanised ZM 250 steel (250g/m˜, 20°m thick).

2 | Hinges
Minimum four screwed steel hinges, adjustable and replaceable.

3 | Handles
A set of two U-shaped aluminium handles.

4 | Europrofielcylinder: 1/2 CO cylinder

5 | Treshold: 4-sided door frame (pre-concreted)

OPTIONAL FITTINGS

1 | Door frame and leaf finish
Stainless steel 304, 316 or RAL paint.

2 | Hinges
One or more hinges can be added; these are always adjustable and replaceable.
Stainless steel.

3 | Handles and pivots
Handles, doorknobs, pull handles etc. In aluminium or stainless steel.

6 | Security stud system
2 studs.

9 | Door closers
With scissor arm or sliding arm, fitted on the hinge or non-hinge side,
with or without closure selectors, open position maintained etc.

11 | Remote monitoring
Indication of leaf position, locking latch position, indication of leaf status.

12 | Various options
Door stops, storm chains, impact plates and many other fittings...

Heinen doors can combine performance features on a bespoke basis. Depending on your needs, one or more performance features are added to the basic, robust Metal+ door. Some performances are only available with the welded and mortar filled installation method.



Heinen

www.heinen-doors.com

For BIM files, please consult us. Our products are certified CE

Copyright © Heinen 2024 | Non-contractual document.