




LANE MARKERS

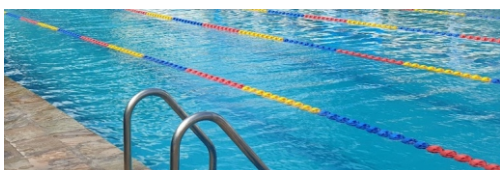

Anti-wave racing lane dividers made from 150mm diameter UV stabilized high density polyethylene discs assembled on stainless steel cable with end tensioners. Standard length is 25m long for half olympic pools, other lengths being available on request.

ROLLERS



A mobile stainless steel roller is also available to store the lane markers with capacity to carry 6x25m lengths.

DIVING BOARD & POOL SLIDES



Dayliff springboards are supplied in either 3 or 4 metre lengths and made from a hardwood laminated core covered with a non-slip finish GRP coating. Also available are 1½" stainless steel supports for spring board mounting.

The Dayliff pool slide is made of a smooth GRP surface which when lubricated with flowing pool water offers extra swimming pleasure at the poolside. The steps and supports are made of Stainless-steel tubes to withstand wet conditions. Available in white color though other colors are available on order.

POOL BEDS



Sturdy, stylish and stackable GRP pool beds designed to add comfort to the pool swimming experience. Available with fixed and adjustable back rest in white colour with others available on order.


SPA FITTINGS



Certikin spa jets are used in conjunction with air control to offer massage in concrete/thin wall spa/jacuzzi. The jets require a pre manifold to be able to span a concrete wall otherwise used as is on a thin wall structure.


A Venturi jet is however only recommended for concrete/masonry wall. Both jets are rated for 5m³/hr.

STARTING BLOCK

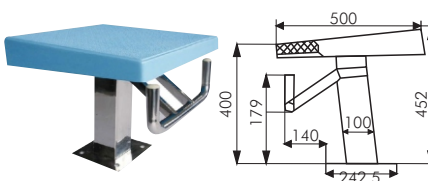

A one step stainless steel starting block with anti-slip platform for competition use with lane markers.

COUNTERFLOW JET STREAMS

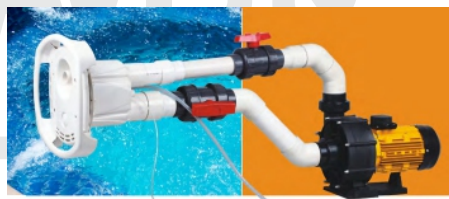


Counterflow Jetstreams are the ideal way to improve swimming pleasure either by providing no lap

swimming exercise or for underwater massage. The units comprise a jet assembly adjustable for strength and direction mounted in the pool wall powered by a remote Dayliff Jetspa pump that is provided with a safe pneumatic control switch. Kits include the jet body with niche for wall mounting, massage and air hoses and control switch. In addition a separately supplied Jetspa 3KW jet pump and inter-connecting piping and valves are required.

iSaverX



The Dayliff iSaverX is a frequency converter that varies the speed of pool pump motor. The effect of speed changes is to reduce the running cost up to 75% of the pool pump rating since normal filtration does not necessarily need high speed. The pump will be much quieter offering ecofriendly performance and offers longer life span due to working in lower speeds.



The controller has 3 default speeds at 1400, 2000 and 2900rpm but there are options of 3 settable speeds for 24hr operation. The controllers offer error codes referred in the operation manual for troubleshooting. An RS485 Modbus communication capability is provided.