




# DIN3

## Vertical Multistage Centrifugal Pumps

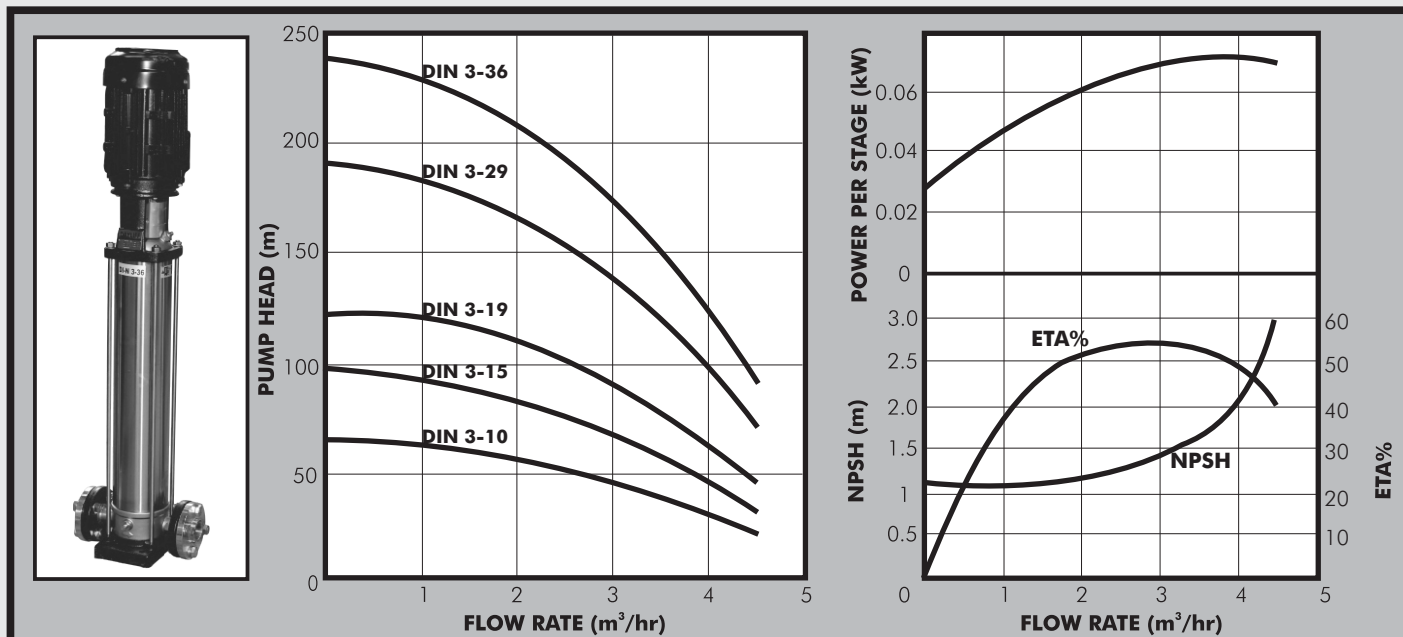

### PUMP

The DAYLIFF DIN pump range are of non self priming vertical multistage in-line centrifugal design suitable for a wide range of water supply, irrigation, liquid transfer and boosting applications. The pumps are of heavy duty construction and designed for continuous duty in commercial and industrial installations. All DIN pumps feature AISI 316 stainless steel vital components in contact with water including the impellers, intermediate chambers, shaft and top and bottom housings and are suitable for pumping highly mineralised corrosive water. All pumps are water lubricated and are provided with a standard cartridge type mechanical seal. They are supplied complete with BSP internally threaded counter flanges.

### MOTOR

The pumps are coupled to high efficiency IE3 totally enclosed fan cooled 2-pole motor complying with IEC standards and must be connected to an effective motor starter in accordance with local regulations.

**Enclosure Class:** IP55

**Insulation Class:** F

**Speed:** 2900rpm

### OPERATING CONDITIONS

**Pumped Liquids:** Thin, clean, non-explosive liquids without solid particles or fibres.

**Liquid Temperature Range:** -15°C to +120°C

**Maximum Ambient Temperature:** +50°C

**Maximum Suction Lift:** According to the NPSH curve plus a safety margin of 1m

**Maximum Operating Pressure:** 23 bar

**Maximum Inlet Pressure:** DIN3-15 to 29-10bar, DIN 3-36 - 15bar

### PUMP DATA

Model	Motor			Full Load Current (A)	I Start I	Dimensions (mm)				Weight (kg)
	Voltage (V)	kW	HP			H1	H2	D1	D2	
DIN3-10	1x240	0.75	1.0	4.1	2	414	649	141	115	26
	3x415			2	5.4					
DIN3-15	1x240	1.1	1.5	6.9	2	504	793	177	141	34
	3x415			2.2	6.3					
DIN3-19	1x240	1.5	2	8.9	1.6	592	887	177	141	40
	3x415			3.5	7.1					
DIN3-29	1x240	2.2	3.0	4.8	6.8	772	1067	177	141	45
	3x415			6.5	6.5					
DIN3-36	3x415	3	4	6.5	6.5	902	1218	197	147	56

