



THE JAMAICA CONSTABULARY FORCE

Transport Management and Maintenance Division Fleet Management Standard Operating Procedures

Title: TMMD Fleet Management Standard Operating Procedures	Number: JCF/TMMD/PR/SFs/0001/2021
Effective Date: November 30, 2024	Pages: 10
Review Date: November 25, 2024	Distribution: Services Branch, TMMD
Revision # 1	Process Owners: ACP Services Branch,
Rescinds: November 15, 2021	
Authors: TMMD	Review: Triennially
First Published: November 15, 2021	

TMMD Fleet Management Standard Operating Procedures

Introduction

This Standard Operating Procedure represents the standardized guidelines of the Jamaica Constabulary Force (JCF) fleet of service vehicles to include heavy duty and light trucks, SUVs, pick-ups, motor cars, motor cycles and pedal cycles.

The JCF fleet assets shall be managed in accordance with the life cycle approach to material management (from acquisition to disposal)/ Board of Survey (BOS/MOFPS) and with the principles of economy, prudence and probity, while minimizing any negative environment impact.

Whenever JCF fleet assets are scheduled for replacement (BOS), it will be viewed as an opportune time to evaluate vehicle need, types and requirements.

No vehicle shall be operated with a known safety deficiency and no smoking is permitted in JCF fleet vehicles.

1.0 Purpose

- 1.1** The purpose of this procedure is to ensure that the JCF Fleet of vehicles are properly serviced and maintained to the highest standard to provide effective and efficient mobility within the organization in line with the Government of Jamaica (GOJ) motor vehicle policy (Ministry of Finance and the Public Service, MOFPS)
- 1.2** To ensure that the JCF vehicles are utilized and maintained in a manner that provides the best possible support to the organization's operations through economical and environmentally responsible fleet management.

2.0 Scope

This standard operating procedure applies to all wheeled vehicles owned by the Commissioner of police and operated by the Jamaica Constabulary Force.

3.0 Responsibilities

- 3.1 The ACP Services Branch**
The ACP Services Branch shall be responsible to provide centralised management of the JCF's fleet of vehicles in respect to their acquisition, distribution, disposal, replacement through its Asset Management System, and providing fleet fuels
- 3.2 Transport Manager**
Transport Management and Maintenance Division (TMMD), through its Vehicle Management System, have the responsibility for maintenance, including general

servicing and repairs. All Service Vehicles shall be provided and utilized only when required to conduct JCF's business.

3.3 Section Supervisors

Sub-Officers and Team Leaders are responsible for enforcing and adhering to the current procedures recommended by the manufacturer of the unit to stay aligned with their recommendations and specifications also instructions through local Dealers and from TMMD Commander /Fleet Manager.

4.0 Standard Operating Procedures

4.1 Procedures for General Service:

5.1.1 On arrival at TMMD Check Point:

4.1.1.1 On arrival at TMMD the motor vehicle fuel advance card is handed over and the vehicle information entered into the TMMD Vehicle management Inventory Data System and placed on records.

- Verification of vehicle information and security check must be carried out.
- Nature of defects reported
- Physical status of vehicle checked along with all items inside.
- Logbook is inspected to ensure compliance
- Records must be entered on the prescribed checklist and the driver signs if in agreement and receives a copy.
- All information is to be entered into the VMS and the System generates a Job Card.

4.1.1.2 Inspection is carried out by Motor Vehicle Inspection Team to diagnose reported defects and other maintenance problems

- Recommendation{s} made.
- Unit handed over to the Sub/Officer, Supervisor in charge of the section where repairs are to be carried out.
- Unit assigned to one of the technicians for further checks and repairs.

4.2 Servicing of Units

All units MUST be serviced as a routine in accordance with manufactures guidelines, recommendation and specifications also with instructions from the local dealers and TMMD Command.

4.2.1 The following must be adhered to and serve as a guide:

4.2.1.1 Quality and genuine parts and products are always recommended by manufacturer, dealer and T.M.M.D.

4.2.1.2 Servicing units at the recommended or accumulated service mileage or time, minimizes excessive wear and tear and major damages; therefore, it is recommended that servicing is done on time.

4.2.1.3 New vehicles under dealers' warranty are first serviced at an accumulated mileage not exceeding 1000km. Upon accumulating 700km T.M.M.D must be informed of service mileage. TMMD will make the appointment for a General Service with the dealer.

4.2.1.4 New Existing units under dealers' warranty must not exceed an accumulated 5000KM or three {3} months. Upon accumulating 4500Km service mileage T.M.M.D must be notified. TMMD will make the appointment for a General Service with the dealer.

4.2.1.5 At least minimum maintenance is required once the unit accumulates the requisite service mileage of 5,000KM or the three (3) months' time span, whichever comes first.

4.2.1.6 T.M.M.D. will make **ALL** appointments with **ALL** companies that has dealers' warranty.

4.2.1.7 All appointment must be made through SSP i/c TMMD or designate.

4.2.1.8 **NO DIRECT CONTACT** for appointment for servicing or any other maintenance activity is permitted between the Dealer and any JCF transport personnel or any personnel from an office assigned a Service Vehicle or any person acting on their behalf.

4.2.1.9 Service Vehicles not under dealers' warranty – accumulating 5000 Km service mileage must be taken to T.M.M.D garage where the appropriate servicing and maintenance procedures will be undertaken.

4.2.1.10 It is recommended that Service Vehicles having appointment for maintenance (Servicing) or repairs **NOT** be detailed for any other duty on that particular day.

4.2.1.11 Vehicles which exceed the service mileage before an appointment is made will have their Advance Card deactivated.

4.3 On site Servicing Procedures

Tools, service parts, must be genuine in accordance with manufactures specification: spark plug tool, jack, lug tools, screw driver, air impact wrench, oil filter, oil pan, filter wrench, diagnostic tool, funnel, rag or waste, air nozzle, tyre pressure gauge, creeper or lay down board, wheel cotch security applied and sockets.

4.3.1 General servicing

- Allow engine to cool
- Remove drain plug from oil sump (remove sump if sediment or contamination is present)
- Remove and replace oil filter
- Remove and replace air filter
- Check/ replace fuel filter (if Necessary)
- Remove /replace spark plugs (if necessary)
- Check battery starting and charging system
- Clean throttle body
- Check and top up washer fluid
- Check /remove and replace front disc pads (if necessary)
- Adjust hand brake
- Place diagnostic machine in unit if check engine light appears on dash board. Replace sensors where required.
- Check and ensure tyres are properly inflated

- Replace or rotate tyres as necessary (align and balance if unevenly worn)
- Upon completion units are placed on a level surface where all fluids and lubricants are double checked to ensure they reach the level required. Units are started and allow to throttle for no less than five (5) minutes to satisfy that there are no oil leaks.

4.3.2 Oil Change

- Locate oil plug
- Place pan under plug to catch oil
- Remove oil sump with correct wrench or socket
- Wipe surface clean and remove oil hazardous items or sediments once oil stop draining
- Replace and tighten oil plug securely

4.3.3 Filter Change

- Locate oil filter
- Unscrew oil filter using filter wrench
- Wipe filter surface on engine
- Hold some oil to the filter
- Lubricate original filter surface rubber on new filter
- Screw new oil filter on hand-tight

4.3.4 Add Oil

- Locate and remove engine oil cap
- Pours in the pre-determined amount of oil
- Replace engine oil cap
- Clean surface using rag or waste
- Check to ensure oil level is correct via the dipstick

4.3.5 Tyres And Brakes

- If vehicle is still in the air use air impact wrench and socket to remove all nuts from both tyres
- Conduct examination and assessment of brake pads and brake shoe
- Replace pads and or shoe if necessary
- Adjust brake, hand brake, hand brake cable if necessary
- Rotate or change tyres if necessary
- Place tyres back on lug tools
- Screw lug back
- Check tyre pressure

4.3.6 Automatic Transmission (AT)

Servicing of automatic transmission is done in accordance with manufactures recommendations. However due to the high operating temperature under which JCF service vehicles function we opt to service automatic transmission every accumulated 30,000 – 35000km.

4.3.6.1 AT servicing procedures

- Remove drain plug from transmission sump and drain fluid in container.
- Remove transmission sump
- Removed & replaced transmission filter
- Clean surface
- Apply sealant and fit gasket
- Replace transmission sump
- Replace transmission fluid in accordance with manufactures recommendation
- Replace trans-axle seal(s) (if necessary)

- Start unit and allow throttling for three (3) to five (5) minutes.
- Manipulate transmission lever by shifting from park to drive to reverse in a timely manner.
- Check mounts and check for oil leak
- Vehicle inspector test drive for smooth changes.

4.3.7 Check Fluid Levels

- Ensure that wiper fluid bottle (windscreen wash), anti-freeze (Radiator), brake fluid levels, transmission fluid, engine oil level is intact. Add appropriate fluid where necessary.
- Any other defects observed would also be remedied. All mounts to include transmission, engine muffler and rack & pinion mount are also checked.

4.3.8 Diesel

In servicing diesel unit basically same procedure as the Gas units however attention must be paid to:

- The diesel oil filter and lift pump
- Injectors
- Injectors nozzle
- Check for miss.....
- Check for diesel fluid leaking or escape


4.3.9 Front End Alignment & Suspension

- Routine front end and suspension checks are made once the service vehicle enters the compound
- The motor vehicle inspector does the assessments then makes recommendation
- Defective Front end & suspension parts are removed and replaced accordingly
- Computerized wheel alignment and balancing are done
- Unit handed over to TMMD motor vehicle inspector for drive test

- Upon satisfaction of road worthiness, records are updated and unit handed over
- Advanced card released.

4.3.10 Update Records

- | | |
|-----------------|---|
| 4.3.10.1 | Calculate and apply service sticker or recent mileage |
| 4.3.10.2 | Tip to know when next to perform maintenance service |
| 4.3.10.3 | Update log books |
| 4.3.10.4 | Record on the Vehicle Management System |

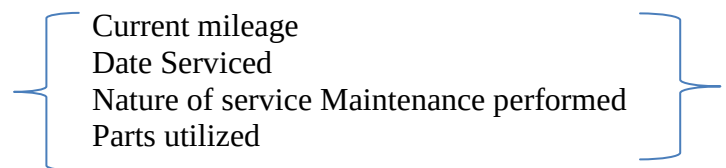

The section supervisor hand over unit to JCF/TMMD Motor Vehicle Inspector for road testing and also to verify that job was done satisfactorily.

- Once repairs done meet the TMMD standard of satisfaction the Advance Card is handed over, the vehicle is released and the data system updated accordingly.

4.4 Turnaround times for repairs:

- | | |
|--------------|--|
| 4.4.1 | General service.... Same day |
| 4.4.2 | Minor mechanical repairs ... Same day |
| 4.4.3 | Major mechanical repairs ... five (5) days |
| 4.4.4 | Engine rebuilding..... two (2) weeks |
| 4.4.5 | Minor body repair..... three (3) days |
| 4.4.6 | Major body repair.....two (2) weeks |

All timelines are subject to availability of parts providing other processes are completed (assessment/ approval etc.).