Import relevant packages here.

In [1]:

```
import matplotlib.pyplot as plt import pandas as pd
```

Load the data and verify it is loaded correctly.

- Print it (head, tail, or specific rows, choose a sensible number of rows).
- · Compare it to the source file.

In [2]:

```
filepath= 'cf_data.csv'
data = pd.read_csv(filepath)
#choose rows 5-10 to print
data.iloc[5:10,:]
```

Out[2]:

	dv	s	а
5	-0.682448	53.8232	-0.283414
6	-0.768859	53.8957	-0.271604
7	-0.860452	53.9770	-0.133532
8	-0.832777	54.0678	0.243356
9	-0.576125	54.1436	0.406759

In the ensuing, you will use numpy.

Let's create a grid for the values to plot. But first create **two arrays named** dv **and** s using numpy. linspace that hold the grid values at the relevant indices in their respective dimension of the grid.

Create a **grid named** a with zeros using numpy. zeros in to which calculated acceleration values can be stored.

Let the grid span:

- Speed difference dv [m/s]
 - From -10 till 10
 - With 41 evenly spaced values
- Headway s [m]
 - From 0 till 200
 - With 21 evenly spaced values

In [3]:


```
import numpy as np

# Create the speed difference array
dv = np.linspace(-10, 10, 41)

# Create the headway array
s = np.linspace(0, 200, 21)

# Create the grid for acceleration values
a = np.zeros((len(s), len(dv),))

# Print the shape of the arrays
plt.imshow(a, extent=[s[0], s[-1], dv[0], dv[-1]], aspect='auto', origin='lower')
plt.colorbar(label='Acceleration')
plt.xlabel('Headway s(m)')
plt.ylabel('Speed Difference dv(m/s)')
plt.title('Acceleration Grid')
plt.show()
```

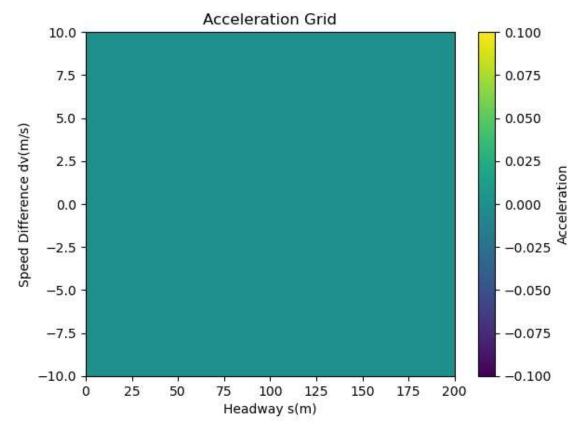

Create from the imported data 3 separate $\ \mathrm{numpy}\$ arrays for each column $\ \mathrm{dv}\$, $\ \mathrm{s}\$ and $\ \mathrm{a}\$. (We do this for speed reasons later.)

- Make sure to name them differently from the arrays that belong to the grid as above.
- You can access the data of each column in a DataFrame using data.xxx where xxx is the column name (not as a string).
- Use the method to numpy () to convert a column to a numpy array.

In [4]:

```
DV = data.dv.to_numpy()
S = data.s.to_numpy()
A = data.a.to_numpy()
print(DV)
print(S)
print(A)
```

```
[-0.74324 -0.55723 -0.454769 ... 5.13764 5.15348 5.25868 ]
[ 53.5427 53.612 53.6541 ... 115.118 114.599 113.112 ]
[ 1.24257 1.77792 0.544107 ... 0.232283 0.262078 -0.61244 ]
```

Create an algorithm that calculates all the acceleration values and stores them in the grid. The algorithm is described visually in the last part of the lecture. At each grid point, it calculates a weighted mean of all measurements. The weights are given by an exponential function, based on the 'distance' between the grid point, and the measurement values of $\,\mathrm{d} v\,$ and $\,\mathrm{s}\,$. To get you started, how many $\,\mathrm{for}\,$ -loops do you need?

For this you will need <code>math</code> . Use an *upsilon* of 1.5m/s and a *sigma* of 30m.

Warning: This calculation may take some time. So:

- Print a line for each iteration of the outer-most for -loop that shows you the progress.
- Test you code by running it only on the first 50 measurements of the data.

In [5]:

```
import math
# Set the values for upsilon and sigma
upsilon = 1.5
sigma = 30
#the scale of test set
cycle=len(DV)
#define expotional weight function for v
def weight_dv(diff_dv, dv, sigma):
    weight=math.exp((-abs(diff_dv-dv))/sigma)
    return weight
#define expotional weight function for s
def weight s(diff s, s, upsilon):
    weight=math.exp((-abs(diff s-s))/upsilon)
    return weight
print('Process is: ')
for q in range(len(dv)):
    for p in range(len(s)):
        omega=0
        omega mul Ai=0
        y_axis=s[p]
        x_axis=dv[q]
        for j in range(cycle):
                 #calculate weighted mean
                omega += weight s(S[j], y axis, sigma)*weight dv(DV[j], x axis, upsilon)
                omega_mul_Ai = weight_s(S[j], y_axis, sigma)*weight_dv(DV[j], x_axis, upsilon)*A[j]
        a[p, q] = (omega_mul_Ai/omega)
    #print process
    print('\{:.2f\}%'.format((q/len(dv))*100))
print('All done!', a. shape)
```


```
Process is:
0.00%
2.44%
4.88%
7. 32%
9.76%
12.20%
14.63%
17.07%
19.51%
21.95%
24. 39%
26.83%
29.27%
31.71%
34.15%
36.59%
39.02%
41.46%
43.90%
46.34%
48.78\%
51.22%
53.66%
56.10%
58.54%
60.98%
63.\ 41\%
65.85%
68.29%
70.73%
73.17%
75.61%
78.05\%
80.49\%
82.93%
85.37%
87.80%
90.24\%
92.68%
95.12\%
97.56%
All done! (21, 41)
```

The following code will plot the data for you. Does it make sense when considering:

- Negative (slower than leader) and positive (faster than leader) speed differences?
- · Small and large headways?

In [6]:

```
X, Y = np.meshgrid(dv, s)
axs = plt.axes()
p = axs.pcolor(X, Y, a, shading='nearest')
axs.set_title('Acceleration [m/s/s]')
axs.set_xlabel('Speed difference [m/s]')
axs.set_ylabel('Headway [m]')
axs.figure.colorbar(p)
axs.figure.set_size_inches(10, 7)
```

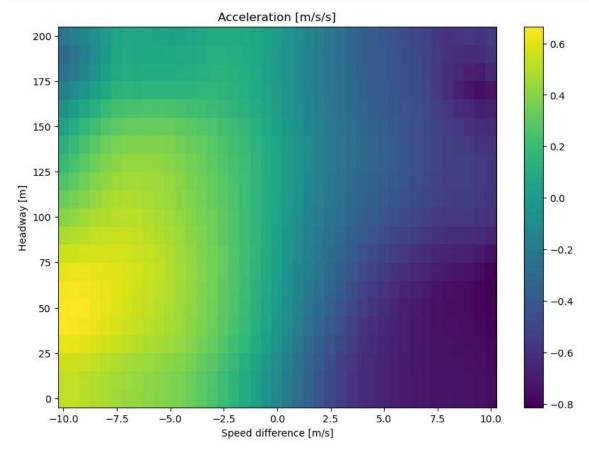

In []: