


図面／規格  
**【POP nut SSHP (stainless steel)】**

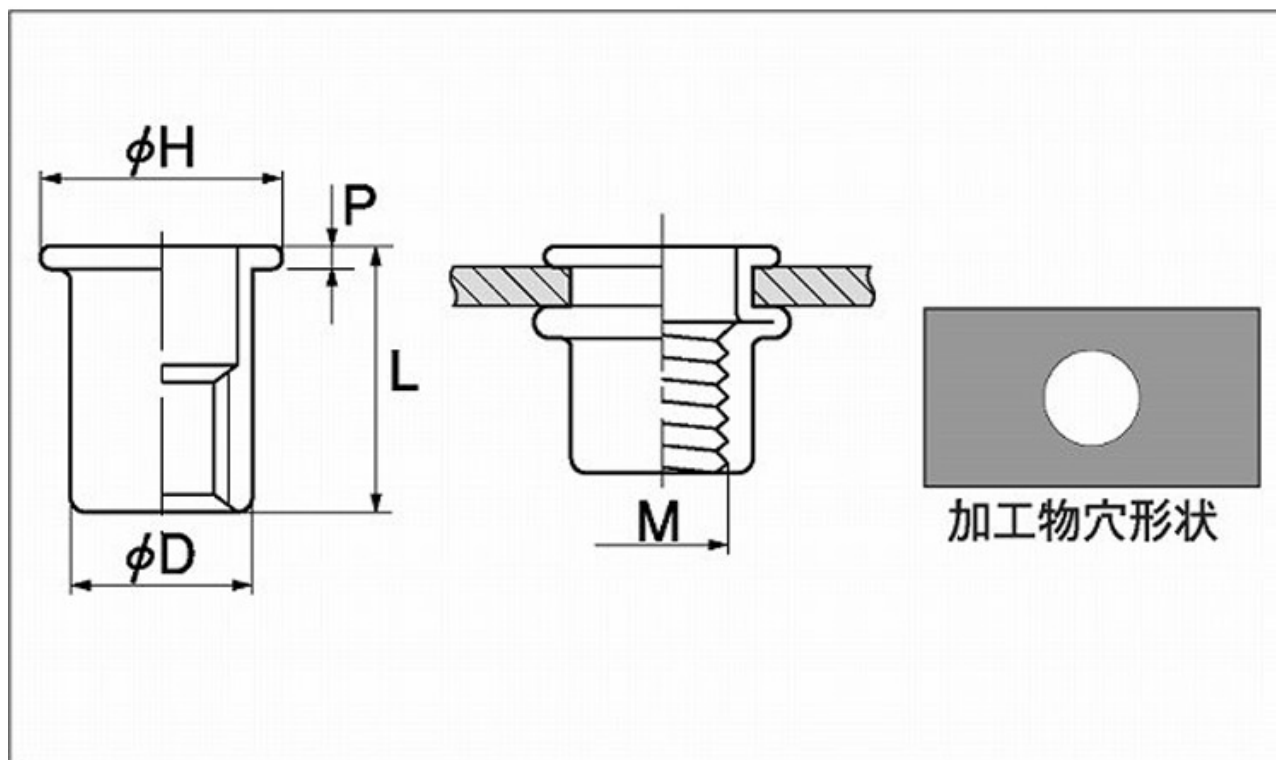

ねじの 呼び M	加工物 穴径	ナット SSPH ■	推奨締結 板厚	L	D	H	P	参考強度	
								使用トルク (N・m)	ねじせん断 (kn)
M3	5.1-5.2	315	0.5-1.5	8.8	5.0	8.0	0.8	3.4	8.1
M4	6.1-6.2	415	0.5-1.5	10.3	6.0	9.3	0.8	6.4	11.1
		425	1.5-2.5	11.3		9.3			
		435	2.5-3.5	12.3		9.0			
M5	7.1-7.2	515	0.5-1.5	11.5	7.0	10.0	1.0	15.2	16.2
		525	1.5-2.5	12.5					
		535	2.5-3.5	13.5					
		545	3.5-4.5	14.5					
M6	9.1-9.3	625	0.5-2.5	15.0	9.0	12.3	1.5	20.7	26.6
		640	2.5-4.05	16.5		12.0			
M8	11.1-11.3	825	1.0-2.5	16.5	11.0	14.3	1.5	50.3	38.3
		840	2.5-4.0	18.0					