


図面／規格  
【(+)<sup>1</sup> Pan IK = 1】

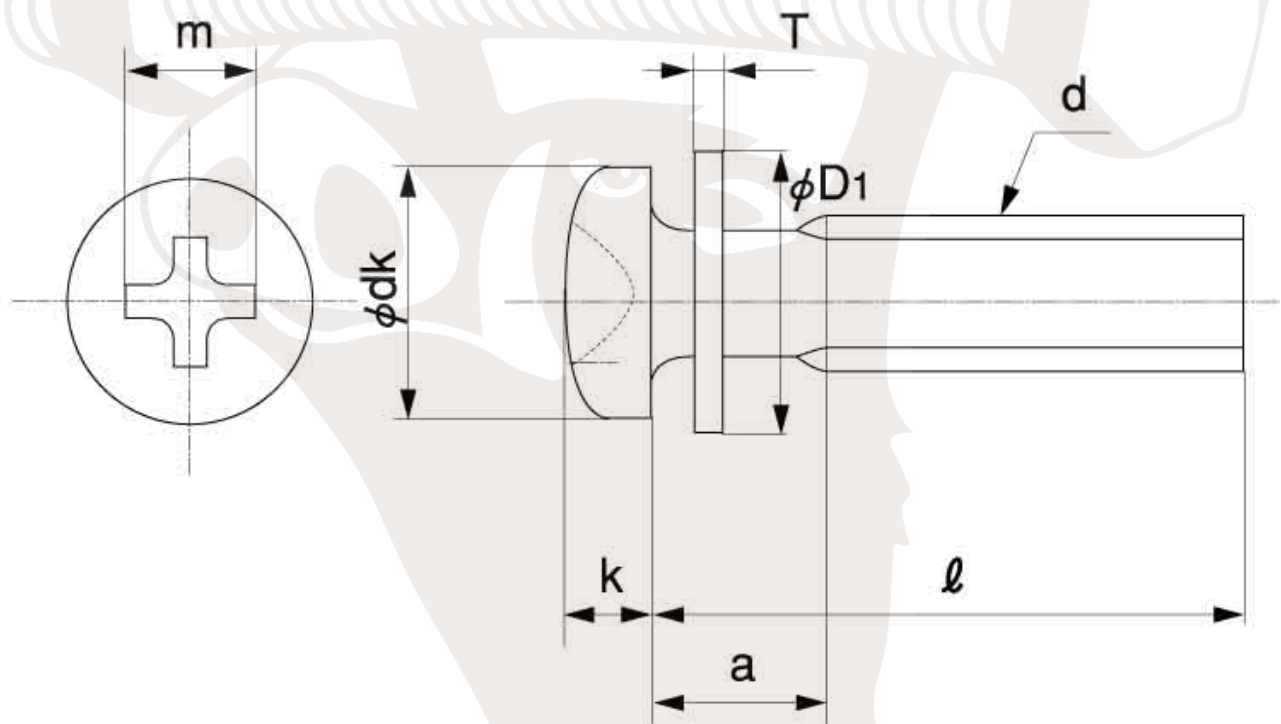

ねじの呼び		M2	M2.3	M2.5	M2.6	M3	M3.5	M4	M6	M8
小ねじ 本体	dk	3.5 <sup>0</sup> <sub>-0.4</sub>	4 <sup>0</sup> <sub>-0.4</sub>	4.5 <sup>0</sup> <sub>-0.4</sub>	4.5 <sup>0</sup> <sub>-0.4</sub>	5.5 <sup>0</sup> <sub>-0.5</sub>	6 <sup>0</sup> <sub>-0.5</sub>	7 <sup>0</sup> <sub>-0.5</sub>	10.5 <sup>0</sup> <sub>-0.7</sub>	14 <sup>0</sup> <sub>-0.8</sub>
	k	1.3±0.1	1.5±0.1	1.7±0.1	1.7±0.1	2±0.15	2.3±0.15	2.6±0.15	3.9±0.2	5.2±0.2
	十字穴	1					2		3	
	m (参考)	2.2	2.4	2.6	2.6	3.6	3.9	4.2	6.3	7.8
平座金D1×T		4.3×0.3	4.6×0.5	5×0.5	5×0.5	6×0.5	7×0.5	8×0.8	11.5×1.6	15.5×1.6
座面から完全ネジ部までの最大値a		1.1	1.3	1.4	1.4	1.5	1.7	2.3	3.7	4.2