


図面／規格

【Round R retaining ring (Ochiai)】

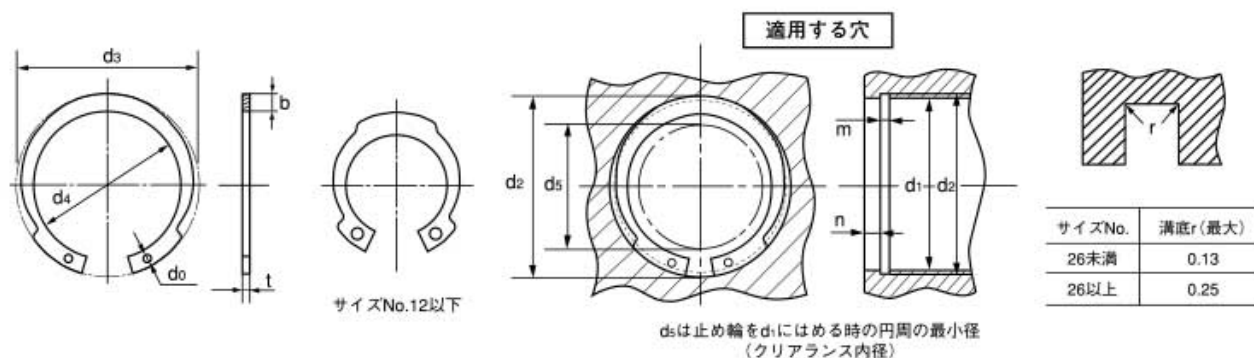

単位: mm

サイズNo.	止 め 輪						適 用 す る 穴										
	d ₃		d ₄	t		b	d ₀	公差	d ₅	適		用		m	n		
	基本寸法	公差	(参考)	基本寸法	公差					d ₁	d ₂	基本寸法	公差				
IRTW-	10	11.1	7.7	1	±0.05	1.7	0.9	±0.3	5.9	10	10.4	1.15	1.5	+0.11 0	最小		
	11	12.2	8.6	1		1.8	0.9		6.6	11	11.4	1.15	1.5				
	12	13.3	9.7	1		1.8	0.9		7.6	12	12.5	1.15	1.5				
	13	14.1	10.9	1		1.6	0.9		9	13	13.6	1.15	1.5				
	14	15.1	11.7	1		1.7	0.9		9.8	14	14.6	1.15	1.5				
	15	16.2	12.6	1		1.8	0.9		10.6	15	15.7	1.15	1.5				
	16	17.3	13.5	1		1.9	0.9		11.4	16	16.8	1.15	1.5				
	17	18.3	14.3	1		2	0.9		12.2	17	17.8	1.15	1.5				
	18	19.5	15.3	1		2.1	1		13	18	19	1.15	1.5				
	19	20.5	16.1	1		2.2	1		13.8	19	20	1.15	1.5				
	20	21.5	16.9	1	2.3	1	14.5	20	21	1.15	1.5						
	21	22.5	17.7	1	±0.2	2.4	1.2	+0.21 0	15	21	22	1.15	1.5				
	22	23.5	18.7	1		2.4	1.2		16	22	23	1.15	1.5				
	24	25.9	20.7	1.2		2.6	1.2		17.5	24	25.2	1.35	1.8				
	25	26.9	21.5	1.2		2.7	1.2		18.5	25	26.2	1.35	1.8				
	26	27.9	22.3	1.2		2.8	1.2		19	26	27.2	1.35	1.8				
	28	30.1	24.1	1.2		3	1.2		20.5	28	29.4	1.35	2.1				
	30	32.1	25.7	1.2		3.2	1.4		22.5	30	31.4	1.35	2.1				
	32	34.4	27.4	1.2		±0.06	3.5		1.6	+0.4	23.5	32	33.7		1.35	2.55	
	34	36.5	29.1	1.5			3.7		1.6		25	34	35.7		1.65	2.55	
	35	37.8	30	1.5			3.9		1.6		26	35	37		1.65	3	
	36	38.8	30.8	1.5	4		1.6	26.5	36		38	1.65	3				
	37	39.8	31.6	1.5	4.1		1.6	27.5	37		39	1.65	3				
	38	40.8	32.4	1.5	4.2		1.6	28	38		40	1.65	3				
	40	43.5	34.7	1.75	±0.4		4.4	2	+0.25 0		30	40	42.5	1.9	3.75	+0.14 0	
	42	45.5	36.3	1.75			4.6	2			31	42	44.5	1.9	3.75		
	45	48.5	38.9	1.75			4.8	2			33	45	47.5	1.9	3.75		
	47	50.5	40.7	1.75			4.9	2			35	47	49.5	1.9	3.75		
	48	51.5	41.5	1.75		±0.07	5	2		+0.25 0	36	48	50.5	1.9	3.75		
	50	54.2	44	2			5.1	2.2			38	50	53	2.2	4.5		
	52	56.2	45.8	2			5.2	2.2			40	52	55	2.2	4.5		
	55	59.2	48	2			5.6	2.2			42	55	58	2.2	4.5		
	56	60.2	48.8	2			5.7	2.5			43	56	59	2.2	4.5		
	58	62.2	50.4	2			5.9	2.5			44	58	61	2.2	4.5		
	60	64.2	52	2	6.1		2.5	46	60		63	2.2	4.5				
	62	66.2	53.6	2	6.3		2.8	47	62		65	2.2	4.5				
	65	69.2	55.8	2.5	6.7		3.2	49	65		68	2.7	4.5				
	68	72.5	58.5	2.5	±0.08		7	3.2	+0.35 0		52	68	71	2.7	4.5	+0.18 0	
	72	76.5	61.7	2.5		7.4	3.2	55		72	75	2.7	4.5				
	75	79.5	63.9	2.5		7.8	3.2	57		75	78	2.7	4.5				
	78	82.5	66.3	2.5		8.1	3.2	59		78	81	2.7	4.5				
	80	85.5	68.9	2.5		8.3	3.2	61		80	83.5	2.7	5.25				
	85	90.5	72.7	3		8.9	4	64		85	88.5	3.2	5.25				
	90	95.5	76.7	3		9.4	4	68		90	93.5	3.2	5.25				
	100	105.5	84.5	3		10.5	4	76		100	103.5	3.2	5.25				

材質:ばね用鋼 硬さ:44~52HRC 表面処理:ACP(硝酸塩被膜)