


図面／規格
【Spring pin (straight, Taiyo)】

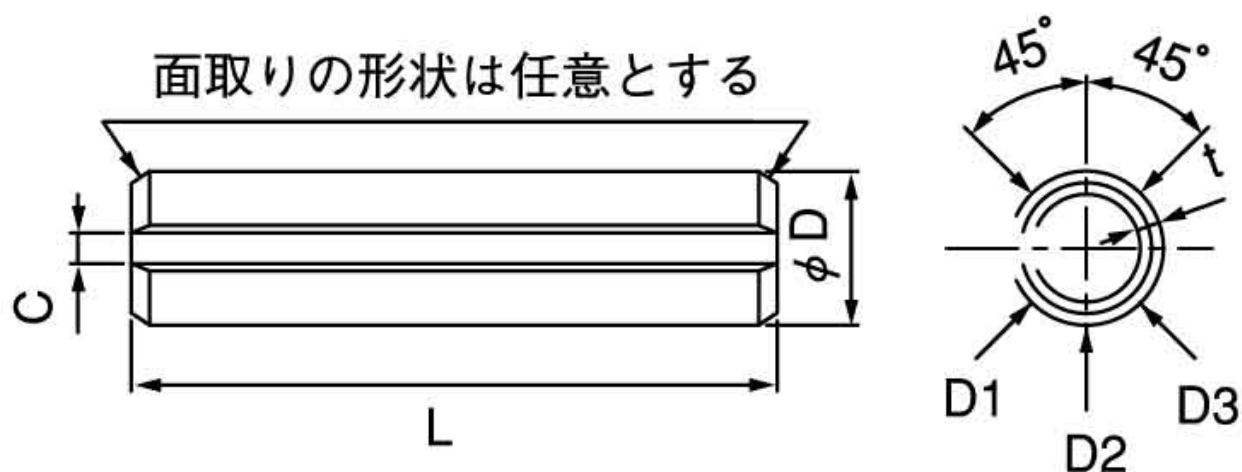

単位mm

呼 び 径		1	1.2	1.4	1.5	1.6	2	2.5	3	3.5	4	4.5	5	6	7	8	10	12	13	
ス リ ン グ ピ ン	外 径 D	最大	1.2	1.4	1.6	1.7	1.8	2.25	2.75	3.25	3.9	4.4	4.9	5.4	6.4	7.6	8.6	10.6	12.6	13.7
		最小	1.1	1.3	1.5	1.6	1.7	2.15	2.65	3.15	3.7	4.2	4.7	5.2	6.2	7.3	8.3	10.3	12.3	13.4
	t (参考)	0.2	0.25	0.28	0.3	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1	1.2	1.4	1.6	2	2	2.5	
	許容力	kN	0.69	1.02	1.35	1.55	1.68	2.76	4.31	6.20	8.45	10.80	13.96	17.25	24.83	33.83	44.13	68.94	86.22	112.78
適用する穴 (参 考)	径	1	1.2	1.4	1.5	1.6	2	2.5	3	3.5	4	4.5	5	6	7	8	10	12	13	
	許容差	+0.08 0					+0.09 0					+0.12 0					+0.15 0		+0.2 0	