


図面／規格  
【Katamaru key (JIS (quenched))】

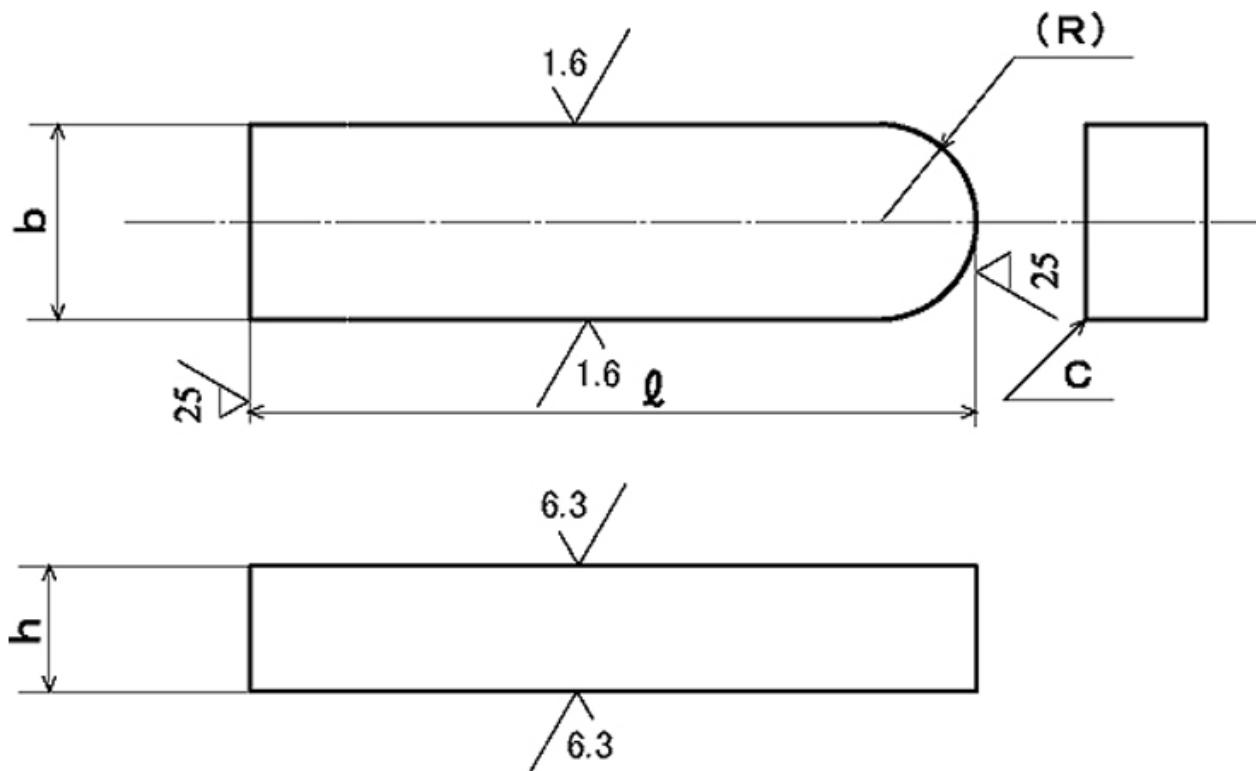

キーの 呼び 寸法 $b \times h$	キーの寸法					$c$	$l$
	$b$	許容差 ( $h9$ )	$h$	許容差			
$2 \times 2$	2	0	2	0	$h9$	0.16	6~20
$3 \times 3$	3	-0.025	3	-0.025		~	6~36
$4 \times 4$	4	0	4	0		0.25	8~45
$5 \times 5$	5	-0.03	5	-0.03		0.25	10~56
$6 \times 6$	6		6			~	14~70
$(7 \times 7)$	7	0	7	0		0.4	16~80
$8 \times 7$	8	-0.036	7	-0.036			18~90
$10 \times 8$	10		8				22~110
$12 \times 8$	12		8	0		0.4	28~140
$14 \times 9$	14		9	-0.09		~	36~160
$(15 \times 10)$	15	0	10		$h11$	0.6	40~180
$16 \times 10$	16	-0.043	10				45~180
$18 \times 11$	18		11				50~200
$20 \times 12$	20		12				56~220
$22 \times 14$	22		14				63~250
$(24 \times 16)$	24	0	16	0		0.6	70~280
$25 \times 14$	25	-0.052	14	-0.11		~	70~280
$28 \times 16$	28		16			0.8	80~320
$32 \times 18$	32	0 -0.062	18				90~360