


図面／規格
【Flatfish nut】

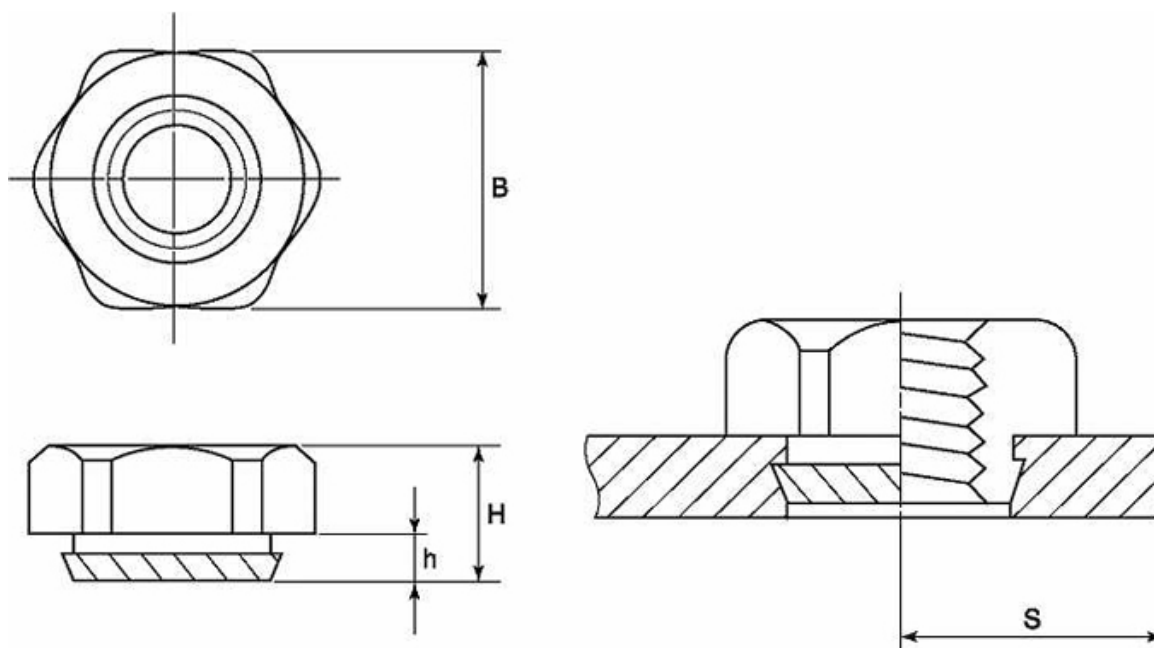

S: 下穴中心点から母材端面までの最小距離 (mm)

ネジの呼び M	加工物 穴径 (mm)	カテナット No. ■-■	最小板厚 (mm)	B (mm)	H (mm)	h (mm)	S (mm)
M2×0.4	4.5 ^{+0.08} ₋₀	2-09	1.0	5.5	3.0	0.9	4.5
M2.5×0.45		2.5-09					
M2.6×0.45		2.6-09					
M3×0.5	4.5 ^{+0.08} ₋₀	3-05	0.6	6.0	2.6	0.5	4.5
		3-07	0.8	5.5	2.8	0.7	
		3-09	1.0		3.0	0.9	
		3-15	1.6		3.6	1.5	
M4×0.7	5.5 ^{+0.08} ₋₀	4-05	0.6	7.0	2.8	0.5	5.5
		4-07	0.8		3.0	0.7	
		4-09	1.0		3.2	0.9	
		4-15	1.6		3.8	1.5	
M5×0.8	6.5 ^{+0.1} ₋₀	5-09	1.0	8.0	4.0	0.9	6.5
		5-15	1.6		4.6	1.5	
M6×1.0	8.0 ^{+0.1} ₋₀	6-09	1.0	10.0	5.0	0.9	8.0
		6-15	1.6		5.6	1.5	
M8×1.25	10.0 ^{+0.12} ₋₀	8-19	2.0	13.0	6.5	1.9	10.0
M10×1.5	12.5 ^{+0.12} ₋₀	10-19	2.0	15.0	8.0	1.9	12.5
M12×1.75	14.5 ^{+0.12} ₋₀	12-29	3.0	17.0	10.0	2.9	14.5
M16×2.0	18.5 ^{+0.14} ₋₀	16-34	3.5	22.0	13.0	3.4	18.5
M20×2.5	23.0 ^{+0.14} ₋₀	20-39	4.0	27.0	16.0	3.9	23.0