


Drawing / Standard  
【 Socket Cap Screw Sems I=3 】

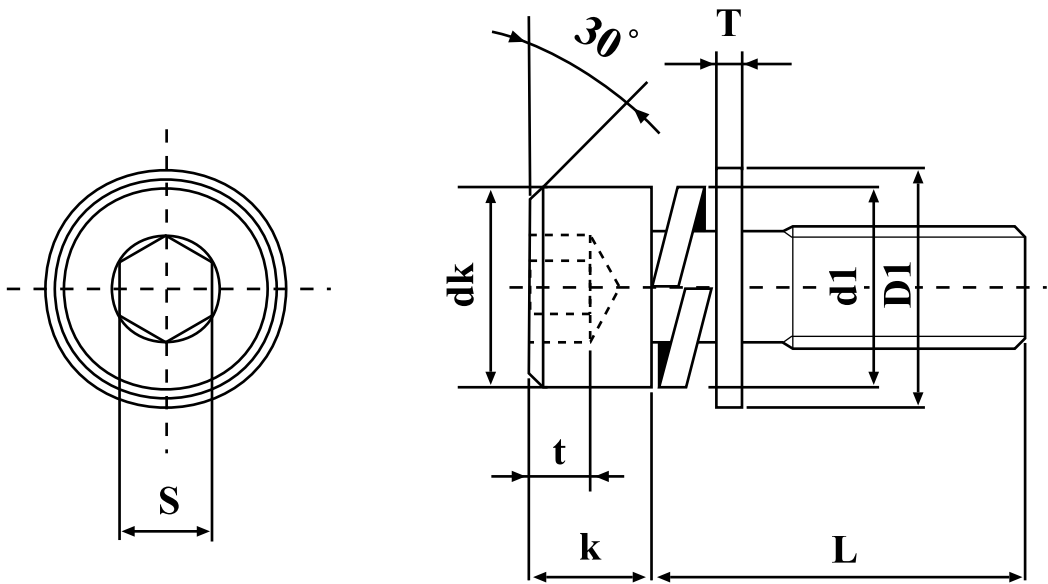

Nominal size (d)		M2	M2.5 (M2.6)	M3	M4	M5	M6	M8
Pitch		0.4	0.45	0.5	0.7	0.8	1.0	1.25
dk	Reference dimension	3.8	4.5	5.5	7.0	8.5	10	13
	Max.	3.98	4.68	5.68	7.22	8.72	10.22	13.27
	Min.	3.62	4.32	5.32	6.78	8.28	9.78	12.73
k	Reference dimension	2	2.5 (2.6)	3	4	5	6	8
	Min.	1.86	2.36 (2.46)	2.86	3.82	4.82	5.7	7.64
s	Reference dimension	1.5	2.0	2.5	3.0	4.0	5.0	6.0
	Min.	1.52	2.02	2.52	3.02	4.02	5.02	6.02
t	Min.	1.0	1.1	1.3	2.0	2.5	3.0	4.0
D1XT		5X0.3	6.5X0.5	7X0.5	9X0.8	10X1.0	12.5X1.6	17X1.6
d1		4.0	4.8	5.5	7.0	8.5	11.5	14.5
Maximum value from seat to thread		2.1	2.7	3.0	4.0	5.4	6.9	8.4